
ROADWAY PROFILE VIEW

ROADWAY CROSS SECTION VIEW

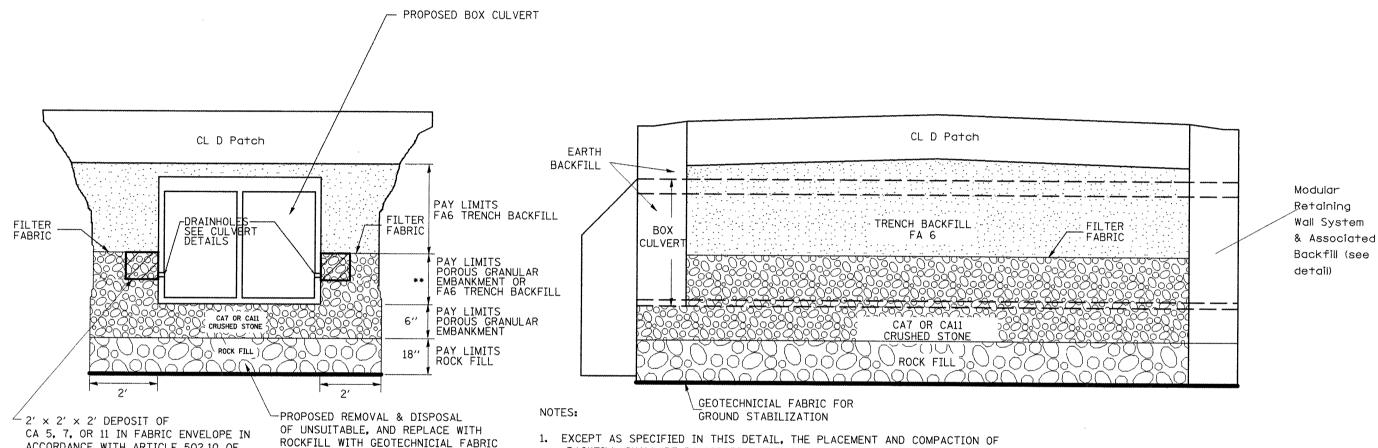

** EXTEND THE POROUS GRANULAR EMBANKMENT TO THE TOP OF THE DRAINHOLE FILTER FABRIC ENVELOPES.

FOR GROUND STABILIZATION.

PAID FOR BY RESPECTIVE PAY ITEMS

ACCORDANCE WITH ARTICLE 502.10 OF

THE STANDARD SPECIFICATIONS (TYPICAL)

- 1. EXCEPT AS SPECIFIED IN THIS DETAIL, THE PLACEMENT AND COMPACTION OF BACKFILL SHALL BE IN ACCORDANCE WITH ARTICLE 502.10 OF THE STANDARD SPECIFICATIONS.
- 2. TRENCH BACKFILL SHALL BE COMPACTED BY EITHER METHOD 2 OR METHOD 3 SPECIFIED IN ARTICLE 550.07, OR IN ACCORDANCE WITH METHOD 1 SPECIFIED IN ARTICLE 550.07, EXCEPT THAT THE COMPACTED LIFTS SHALL NOT EXCEED 8" IN THICKNESS. TRENCH BACKFILL SHALL BE COMPACTED TO A MINIMUM OF 95% OF STANDARD LAB DENSITY.

All dimensions are in inches (millimeters) unless otherwise noted.

Not to Scale

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION	
NAME	DATE	TETINOTO DELAKTME	INT OF TRANSPORTATION
ļ			
			
		Backfill Detail	
ļ		Dacki	III Detail
		COLL VERT.	
		SCALE: HORIZ.	DRAWN BY
		DATE	CHECKED BY

PLOT FILE PLOT USER