

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

INDEX OF SHEETS

- S1 - General Plan & Elevation
- S2 - Index of Structural Sheets & General Notes
- S3 - Stage Construction Details
- S4 - Temporary Concrete Barrier
- S5 - Top of Deck Slab Plan, Profile, Deflection & Elevations
- S6 - Top of Deck Slab Elevations
- S7 - West Approach Top of Slab Elevations
- S8 - East Approach Top of Slab Elevations
- S9 - Superstructure Plan and Cross Section
- S10 - Parapet Plan Elevations and Details
- S11- East & West Approach Slab -Plan and Details
- S12- Bridge Approach Slab Details
- S13- Aluminum Railing, Type L
- S14- 17"x36" PPC Deck Beam
- S15- 17"x36" PPC Deck Beam Details
- S16- Existing West Abutment Repair & Modification Details
- S17- Existing East Abutment Repair & Modification Details
- S18- Bar Splicer Assembly & Mechanical Splicer Details

GENERAL NOTES

Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.

Reinforcement bars shall conform to the requirements of ASTM A 706 Gr 60. See Special Provisions.


Reinforcement bars designated (E) shall be epoxy coated.

Layout of slope protection system may be varied to suit ground conditions in the field as directed by the Engineer.


The Contractor is advised that the existing PPC Deck beams are in a deteriorated condition with reduced load carrying capacity. It is the Contractor's responsibility to account for the condition of the beams when developing construction procedures for removal and replacement of the superstructure.

If the Contractor's procedures for existing deck removal involves placement of heavy equipment on the existing deck beams, a detailed procedure shall be submitted to the Engineer for approval. The procedure shall include calculations, sealed by an Illinois Licensed Structural Engineer, verifying the structural adequacy of the beams for the proposed loads. Cost included with Removal of Existing Superstructure.

Slip forming of the parapet is not allowed.

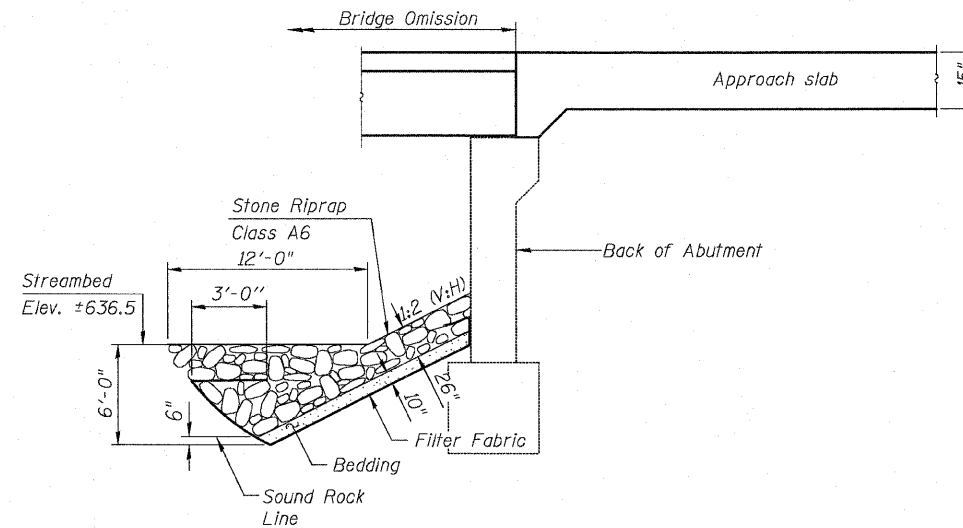

SECTION THRU EAST ABUTMENT



SECTION A-A

INDEX OF STRUCTURAL SHEETS AND
GENERAL NOTES
STRUCTURE NO. 016-2503

DESIGNED	JPM
CHECKED	TG
DRAWN	MPS
CHECKED	JPM, TG



SHEET NO.	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
S2	353	11-5-B	COOK	39	14
S18 SHEETS			CONTRACT NO. 60J44		
ILLINOIS FED. AID PROJECT					