


Notes:
 See sheet 15 of 43 for Detail K and View G-G.
 Approach slab and parapet concrete shall be paid for as Concrete Superstructure.
 Reinforcement shall be paid for as Reinforcement Bars, Epoxy Coated.
 For v(E) bar details, see sheets 11-14 of 43.
 For Granular Backfill for Structures and drainage treatment details, see sheet 2 of 43.
 For additional parapet details, see sheet 13 of 43.
 For Approach Bent & v5(E) bar details, see sheets 25 and 26 of 43.

* Tilt #9 b4(E) bars as required to maintain clearance.

*** Quantity of Aggregate Subgrade Improvement is based on the depth shown and the horizontal limits of the approach slab. Actual depth to be determined by the Engineer based on conditions encountered in the field. Excavation shall be paid for as Removal and Disposal of Unsuitable Material for Structures. For additional requirements, see Special Provisions.

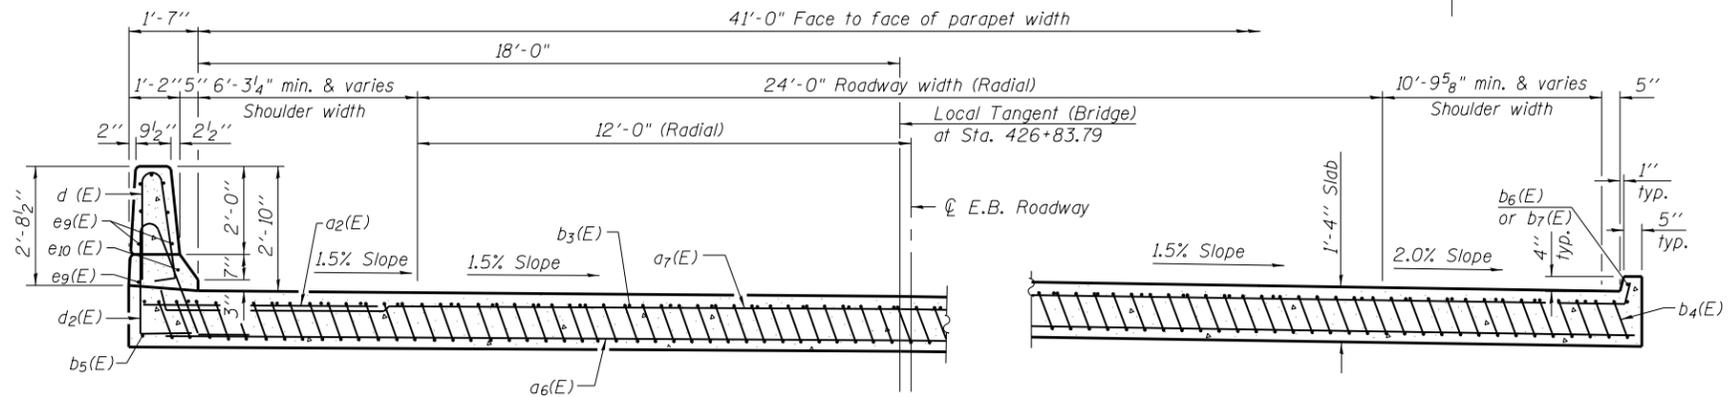


NEAR ABUTMENT

SECTION I-I

(See Plan for dimensions not shown)
(W Appr. EB)

NEAR BENT

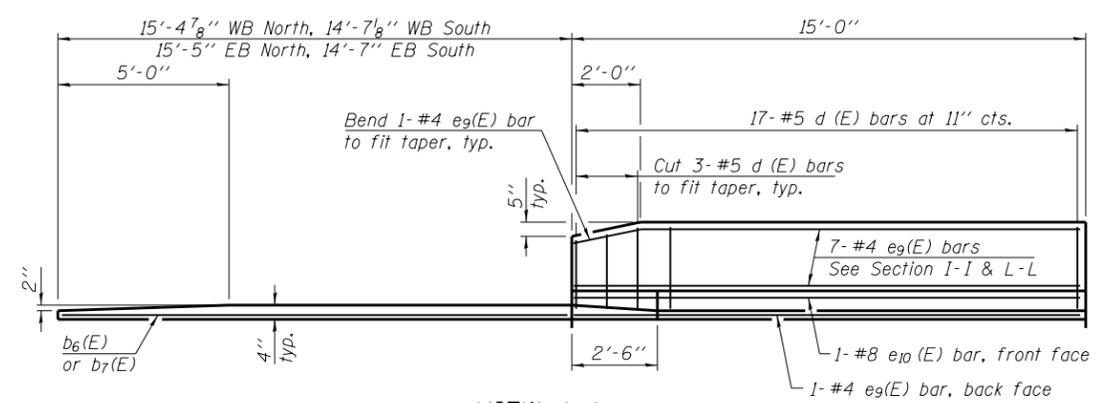

VIEW J-J


MINIMUM BAR LAP

#4 bar = 2'-11"
 #5 bar = 2'-7"

BILL OF MATERIAL

(Two West Approaches)

Bar	No.	Size	Length	Shape
a2(E)	48	#6	6'-6"	—
a6(E)	184	#5	31'-3"	—
a7(E)	100	#4	32'-9"	—
b3(E)	70	#4	29'-8"	—
b4(E)	203	#9	29'-9"	—
b5(E)	4	#4	14'-8"	—
b6(E)	2	#4	14'-0"	—
b7(E)	2	#4	15'-3"	—
d(E)	68	#5	5'-7"	—
d2(E)	68	#5	7'-11"	—
e9(E)	32	#4	14'-8"	—
e10(E)	4	#8	14'-8"	—
Removal and Disposal of Unsuitable Material for Structures			Cu. Yd.	74
Concrete Superstructure			Cu. Yd.	144.0
Reinforcement Bars, Epoxy Coated			Pound	32,080
Aggregate Subgrade Improvement			Cu. Yd.	111

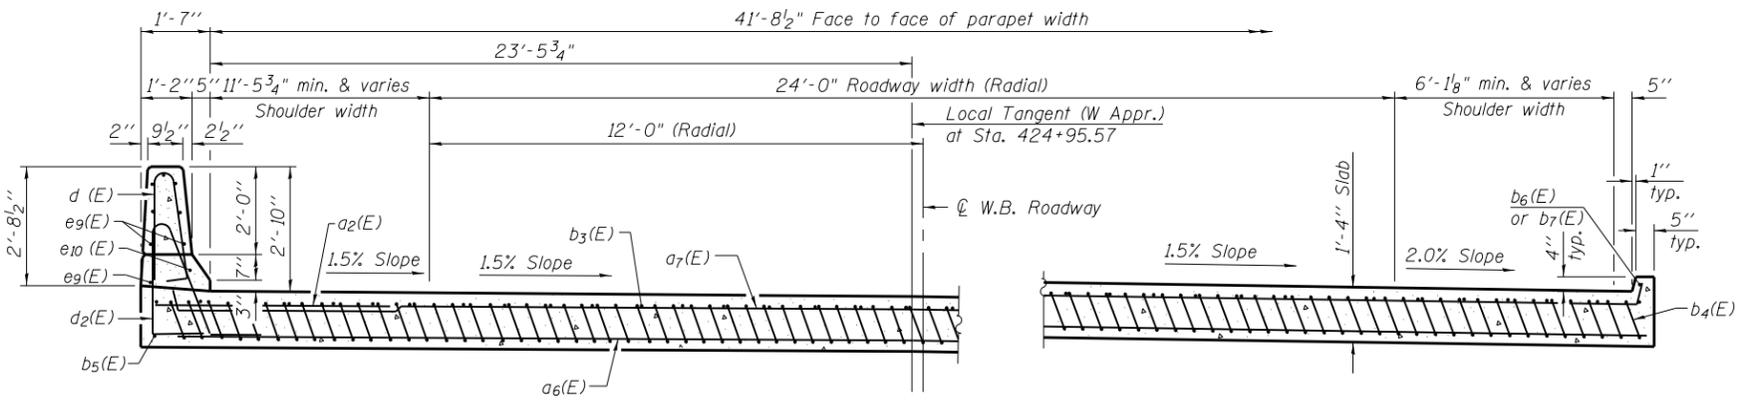


NEAR ABUTMENT


SECTION L-L

(See Plan for dimensions not shown)
(W Appr. WB)


NEAR BENT

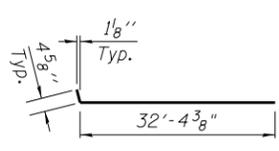


BAR a7(E)

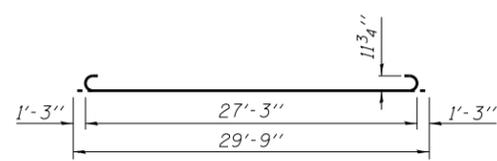

BAR b4(E)



BAR d(E)



BAR d2(E)