
#### STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

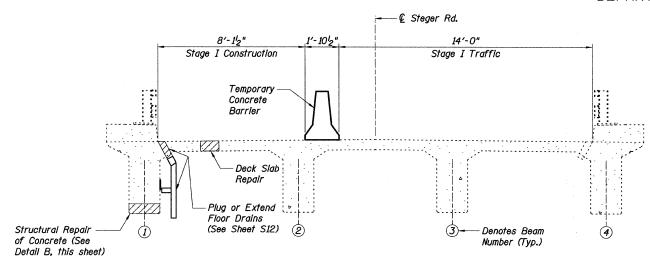

### STAGE I TRAFFIC AND CONSTRUCTION

Note: Only perform concrete repair work above top of deck and bridge railing transition work with the Staging shown.

(Looking Stations Ahead)


## ├<del>-</del> € Steger Rd. 14'-0" 8'-12" Stage II Traffic Stage II Construction Temporary Structural Repair Concrete of Concrete Barrier Plug or Extend Floor Drains (See Sheet S12)


## STAGE II TRAFFIC AND CONSTRUCTION

(Looking Stations Ahead)

Note: Only perform concrete repair work above top of deck and bridge railing transition work with the Staging shown.

DESIGNED: 6WG CHECKED: KPZ

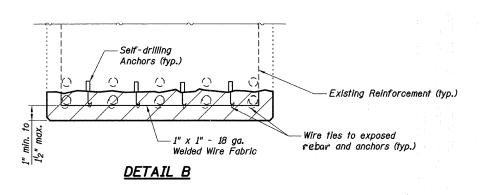




DETAIL A

# TOTAL BILL OF MATERIAL

ITEM	UNIT	SUPER- STRUCTURE QUANTITY	SUBSTRUCTURE QUANTITY		TOTAL QUANTITY
			PIERS	ABUTMENTS	40/11/17/
Slope Wall Removal	Sq Yd	0	0	134	134
Slope Wall 4 Inch	Sq Yd	0	0	134	134
Controlled Low-Strength Material	Cu Yd	0	0	4	4
Plug Existing Deck Drains	Each	8	0	0	8
Cleaning and Painting Exposed Rebar	Sq Ft	25	0	0	25
Structural Repair of Concrete (Depth Equal to or Less Than 5 Inches)	Sq Ft	7	11	2	20
Floor Drain Extension	Each	<i>1</i> 6	0	0	16
Deck Slab Repair (Full Depth, Type I)	Sq Yd	1	0	0	1

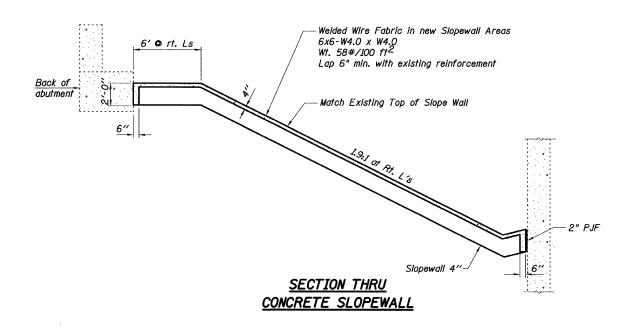

STAGING DIAGRAM AND BILL OF MATERIAL STEGER ROAD OVER I-57 F.A.I. RTE. 57 - SEC. (46-1,2)RS-3&I

KANKAKEE COUNTY STA. 815+16.50

S.N. 046-0083

TOTAL SHEET NO. SECTION COUNTY SHEET NO. S10 57 (46-1,2)RS-3&I KANKAKEE 115 35 S27 SHEETS CONTRACT NO. 66608 FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT

Baker