


4. BRICKS, CONCRETE BLOCKS AND REINFORCED CONCRETE BLOCKS TO BE LAID IN FULL MORTAR BEDS WITH FLUSH JOINTS.

5. WHEN CONSTRUCTED OF MONOLITHIC CONCRETE, USE #4 REINFORCING BARS SPACED AT 12" CENTERS BOTH WAYS IN FLOOR SLAB AND WALLS.

6. FOR SECTION A-A, SEE ABOVE

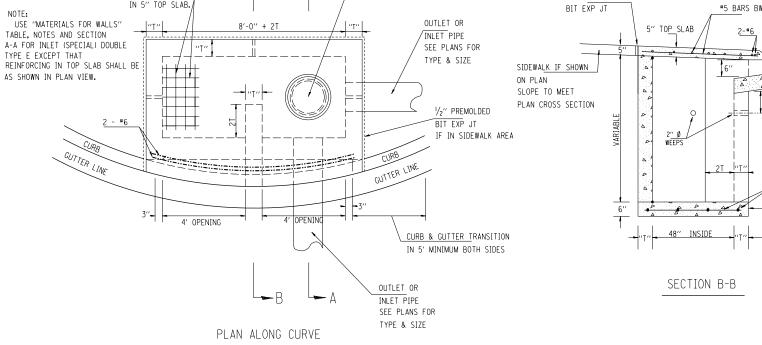

INLET (SPECIAL) DOUBLE TYPE E

10/20/97

REVISIONS		 illinois department of transportation
NAME	DATE	ILLINOIS DEPARTMENT OF TRANSPORTATION
		DRAINAGE DETAILS
		INLET (SPECIAL) TYPE E
		F.A.P. ROUTE 668 (DIRKSEN PARKWAY)
		SECTION 28R-1

SECTION ZOR-1
SANGAMON COUNTY
SCALE NTS DRAWN BY

SCALE NTS DRAWN BY CAD
DATE 06/2013 CHECKED BY JCN

CLSM REQUIRED FOR BACKFILL AROUND MANHOLES AND INLETS

*4 BARS AT 12" O.C. BW

BOTTOM SLAB

CLASS X CONCRETE