

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	2021-2 TREE REMOVAL	*	4	1
		ILLINOIS	CONTRACT NO. 66L68	

* IROQUOIS & KANKAKEE

INDEX

1.

COVER SHEET
2.

GENERAL NOTES
3.

SUMMARY OF QUANTITIES
4.

SCHEDULES

LIST OF ILLINOIS DOT HIGHWAY STANDARDS

- 000001-08

STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 001006

DECIMAL OF AN INCH AND OF A FOOT
- 701400-10

APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
- 701406-12

LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
- 701421-08

LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY,
FOR SPEEDS ≥ 45 MPH TO 55 MPH
- 701428-01

TRAFFIC CONTROL, SETUP AND REMOVAL, FREEWAY/EXPRESSWAY
- 701456-05


PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
- 701901-08

TRAFFIC CONTROL DEVICES

PROPOSED
HIGHWAY PLANS

FAI ROUTE 57
SECTION 2021-2 TREE REM
TREE REMOVAL
IROQUOIS & KANKAKEE COUNTIES


C-93-064-21

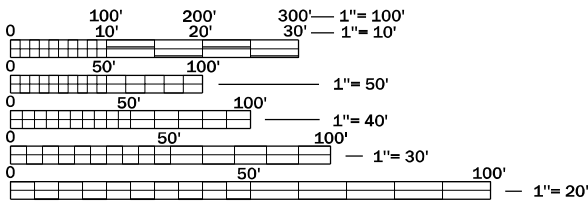

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: BRAD DUNCAN, P.E.
UNIT CHIEF: DARCY CARPENTER
DISTRICT 3 NO. (815) 434-6131
CONTRACT NO. 66L68

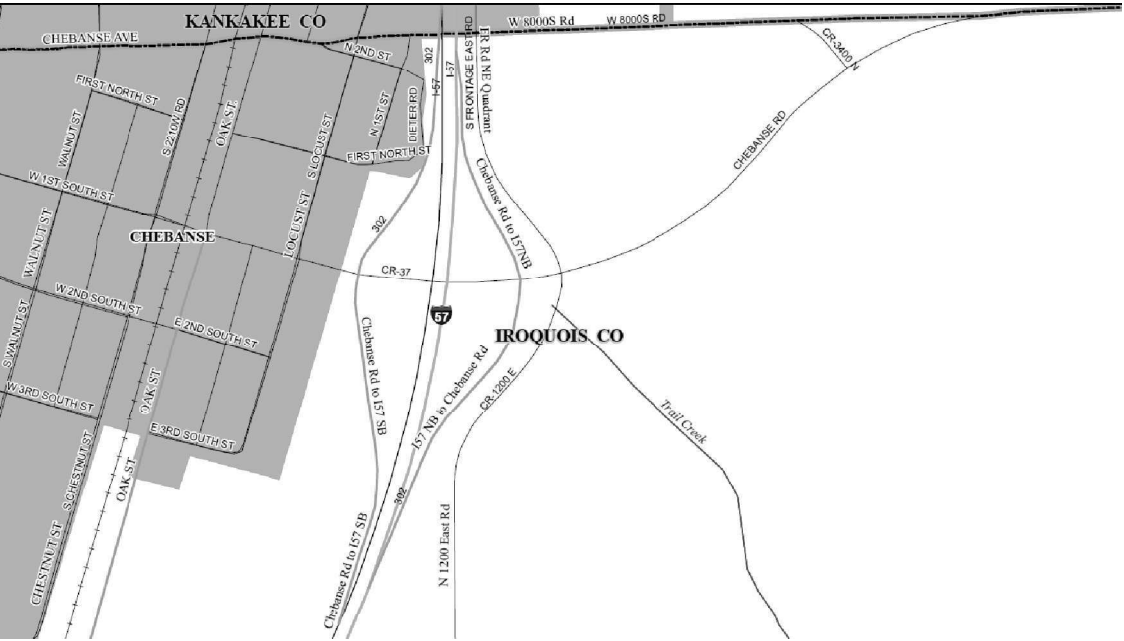

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 24, 2021

Brad Duncan REGIONAL ENGINEER

May 7, 2021 Scott A. Clark
ENGINEER OF DESIGN AND ENVIRONMENT

May 7, 2021 James J. Quinn
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

GENERAL NOTES

FOR STABILIZATION, ALL TYPE III BARRICADES WILL REQUIRE A MINIMUM OF FOUR SAND BAGS PER BARRICADE.

SEEDING WILL NOT BE PERMITTED AT ANY TIME WHEN THE GROUND IS FROZEN, WET, OR IN AN UNTILLABLE CONDITION. LOCATIONS TO BE SEEDED WILL BE DETERMINED BY THE ENGINEER.

ONLY THOSE TREES DESIGNATED BY THE WORK ORDER SHALL BE REMOVED. THE CONTRACTOR SHALL PROTECT ALL DESIRABLE TREES AND SHRUBS FROM FROM DAMAGE DUE TO HIS OPERATIONS. CONSULT ENGINEER IF THERE IS A DESIRABLE TREE IN QUESTION.

THE FINISHED EARTHWORK SHALL HAVE A VEGETATION SUSTAINING SOIL COVERING THE TOP FOUR INCHES (100 MILLIMETERS) IN AREAS TO BE SEEDED OR SODDED. THE VEGETATION SUSTAINING SOIL REQUIRED WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE COST OF THE TREE REMOVAL PAY ITEMS.

ALL EXCAVATED MATERIAL, WHICH INCLUDES DIGGING OR GRADING OF ANY SOIL OR FILL MATERIAL, WITH THE EXCEPTION OF AGGREGATE FILLS, MUST BE INCORPORATED WITHIN THE IDOT RIGHT OF WAY DUE TO ENVIRONMENTAL DOCUMENTATION REQUIREMENTS.

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

THE CONTRACTOR'S ATTENTION IS DIRECTED TO THE PRESENCE OF DEPARTMENT-OWNED UNDERGROUND UTILITIES WITHIN THE LIMITS OF THE PROPOSED IMPROVEMENT. THE CONTRACTOR SHALL REQUEST THE ILLINOIS DEPARTMENT OF TRANSPORTATION, BUREAU OF OPERATIONS IN OTTAWA (815-434-8505 OR 815-434-8506) TO LOCATE THE UNDERGROUND FACILITIES, PROVIDING A MINIMUM OF 72 HOURS NOTICE. THE DEPARTMENT IS NOT A MEMBER OF THE JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS (JULIE) SYSTEM

ALL DAMAGE TO DEPARTMENT OWNED UNDERGROUND FACILITIES, CAUSED BY THE CONTRACTOR SHALL BE REPAIRED TO THE SATISFACTION OF THE DEPARTMENT AT THE CONTRACTOR'S EXPENSE. THIS SHALL INCLUDE ALL TEMPORARY REPAIRS REQUIRED TO KEEP THE FACILITY OPERATIONAL WHILE MATERIAL IS BEING OBTAINED TO MAKE PERMANENT REPAIRS.

THE CONTRACTOR SHALL CONTACT JULIE AT LEAST 48 HOURS PRIOR TO EXCAVATION TO DETERMINE WHICH UTILITIES ARE IN THE AREA.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE
AS BUILT INFORMATION

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE

SUPERVISING CONSTRUCTION FIELD ENGINEER

RESIDENT ENGINEER / TECHNICIAN

START & END DATES
OF CONSTRUCTION:

INSPECTORS:

PREPARED BY: _____
DISTRICT STUDIES & PLANS ENGINEER

DATE: _____

EXAMINED BY: _____
DISTRICT CONSTRUCTION ENGINEER

DISTRICT MATERIALS ENGINEER

DISTRICT OPERATIONS ENGINEER

* IROQUOIS & KANKAKEE

Model Default
FILE NAME: p:\data\amoon.dwt
PROJECT: I:\DOT Documents\DOT Office\District 3\Projects\0366L68\0366L68-shc-cover.dgn

USER NAME = pletschtr	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100,0000 ' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 3/22/2021	DATE - _____	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

F.A.J RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	2021-2 TREE REMOVAL	*	4	2
CONTRACT NO. 66L68				
		ILLINOIS	FED. AID PROJECT	

CHEBANSE INTERCHANGE - KANKAKEE COUNTY (I-57 EXIT 302)				
LOCATION	NUMBER OF TREES AND SIZE	TREE REMOVAL DIAMETER 6-15	TREE REMOVAL DIAMETER OVER 15	TREE REMOVAL SPECIAL TOTALS
		UNIT	UNIT	UNIT
NNW ROW	57 TOTAL TREES (52 @ 6-15 UNITS; 5 @ >15 UNITS)	438	90	528
TOTALS	57 TOTAL TREES (52 @ 6-15 UNITS; 5 @ >15 UNITS)			528

CHEBANSE INTERCHANGE - IROQUOIS COUNTY (I-57 EXIT 302)				
LOCATION	NUMBER OF TREES AND SIZE	TREE REMOVAL DIAMETER 6-15	TREE REMOVAL DIAMETER OVER 15	TREE REMOVAL SPECIAL TOTALS
		UNIT	UNIT	UNIT
NW OUTER RAMP	42 TOTAL TREES (38 @ 6-15 UNITS; 4 @ >15 UNITS)	344	73	417
NNE ROW	14 TOTAL TREES (13 @ 6-15 UNITS; 1 @ >15 UNITS)	121	17	138
NE INFIELD	17 TOTAL TREES (17 @ 6-15 UNITS; 0 @ >15 UNITS)	141	0	141
NE OUTER RAMP	16 TOTAL TREES (16 @ 6-15 UNITS; 0 @ >15 UNITS)	143	0	143
SSW ROW	60 TOTAL TREES (41 @ 6-15 UNITS; 19 @ >15 UNITS)	417	390	807
SW OUTER RAMP	87 TOTAL TREES (78 @ 6-15 UNITS; 9 @ >15 UNITS)	763	181	944
SSE ROW	18 TOTAL TREES (14 @ 6-15 UNITS; 4 @ >15 UNITS)	125	86	211
SE INFIELD	16 TOTAL TREES (14 @ 6-15 UNITS; 2 @ >15 UNITS)	120	32	152
SE OUTER RAMP	17 TOTAL TREES (16 @ 6-15 UNITS; 1 @ >15 UNITS)	126	24	150
TOTALS	287 TOTAL TREES (247 @ 6-15 UNITS; 40 @ >15 UNITS)			3103

SEE SPECIAL PROVISIONS FOR REQUIRED EQUIPMENT

MODEL: Default
FILE NAME: p:\data\amoon.dwg
PROJECT: D:\projects\DOT\Documents\DOT - Office\District 3\Projects\0366\68\CADD\0366\68-shc-cover.dgn