



Illinois Department of Natural Resources

One Natural Resources Way Springfield, Illinois 62702-1271
www.dnr.illinois.gov

JB Pritzker, Governor
Colleen Callahan, Director

June 2, 2021

SUBJECT: Des Plaines River Dam 4 Removal
1W
Cook County
Contract No. FR-438
Item No. 1W - June 11, 2021 Letting
Addendum 1

NOTICE TO PROSPECTIVE BIDDERS:

Below is an addendum to the proposal. This addendum is a revision to page numbered 2 of the project Plans.

Addendum includes a change to pay item concrete removal. Previous pay item code was referenced as 50102400 with a unit of measure as cubic yards.

Changed to read: pay item code X5012503 with a unit of measure as lump sum.


Prime contractors must utilize this material when preparing their bid.

Sincerely,

Ted Montrey, P.E., S.E.
Chief of Design and Construction
Division of Capital Programs
Office of Water Resources

SIGN NOTES

- SIGNS SHALL BE MADE OF 3/4" PLYWOOD OR OXBOARD, OR OF METAL (18 GA.). THE CONTRACTOR SHALL FURNISH ALL MATERIAL AND LABOR FOR CONSTRUCTING AND ERECTING THE SIGNS. THE SIGNS SHALL BE PLACED PRIOR TO THE STARTING OF ACTUAL CONSTRUCTION OPERATIONS AS DIRECTED BY THE ENGINEER. BEFORE ANY SIGN IS ERECTED, IT SHALL BE APPROVED BY THE ENGINEER AS TO ITS APPEARANCE AND QUALITY OF CONSTRUCTION. THE SIGNS SHALL REMAIN IN PLACE AND SHALL BE MAINTAINED IN SATISFACTORY CONDITION UNTIL THE PROJECT IS ACCEPTED BY THE DEPARTMENT. THE CONTRACTOR SHALL THEN REMOVE THE SIGNS AND THE MATERIAL SHALL BECOME THE PROPERTY OF THE CONTRACTOR.
- THE LETTERS ON THE SIGN SHALL BE BLACK MECHANICAL STYLE ON A WHITE BACKGROUND AND APPROPRIATE BORDER LINES.
- PAID AS WOOD INFORMATION SIGNS.

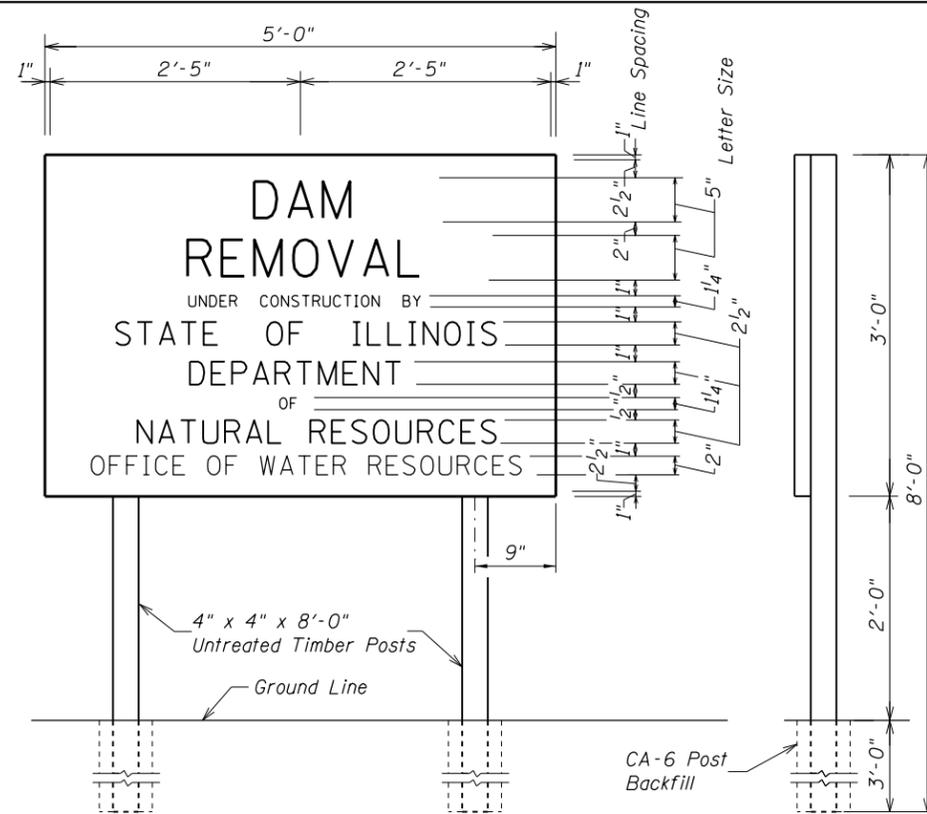

GENERAL NOTES

- ALL ELEVATIONS REFER TO N.G.V.D. (NATIONAL GEODETIC VERTICAL DATUM) 1929 AND NAD (NORTH AMERICAN DATUM) 1983 COORDINATES.
- THE CONTRACTOR SHALL FURNISH, ERECT, MAINTAIN, AND WHEN DIRECTED BY THE ENGINEER, COMPLETELY REMOVE TWO WOOD INFORMATION SIGNS. THE EXACT LOCATIONS OF THE SIGNS SHALL BE DETERMINED BY THE ENGINEER IN THE FIELD.
- THE CONTRACTOR SHALL PROTECT AND RESTORE AT THE CONTRACTOR'S EXPENSE, IN ACCORDANCE WITH ART. 107.20 OF THE STANDARD SPECIFICATIONS, ANY PRIVATE OR PUBLIC PROPERTY, INCLUDING ACCESS ROADS, WHICH MAY BE DAMAGED OR DESTROYED DUE TO CONSTRUCTION OPERATIONS.
- THE LOCATION, MAINTENANCE, REMOVAL, AND RESTORATION TO ORIGINAL CONDITION OF ALL HAUL ROADS SHALL BE APPROVED BY THE ENGINEER, AND ALL COSTS SHALL BE CONSIDERED INCLUDED IN THE CONTRACT.
- ALL DEWATERING COSTS SHALL BE CONSIDERED INCLUDED WITH THE CONTRACT.
- IT IS RECOMMENDED THAT THE DAM REMOVAL BE CONDUCTED DURING PERIODS OF LOW FLOW. HISTORICALLY, LOW FLOW PERIODS OCCUR FROM JANUARY TO THE END OF MARCH AND JUNE THROUGH JULY.
- THE CONTRACTOR SHALL VERIFY UTILITY INFORMATION SHOWN ON PLANS AND CONTACT JULIE BEFORE BEGINNING CONSTRUCTION.
- CLEARING AND TREE REMOVAL WORK SHALL BE SHOWN IN THE CONSTRUCTION SCHEDULE AND SHALL BE CONDUCTED FROM AUGUST 1 THROUGH MAY 31.

UTILITY REFERENCE TABLE

J.U.L.I.E.	Call 48 hours prior to construction	800-892-0123
TELEPHONE	ATT DISTRIBUTION ENRIQUE TORRES	630-573-5450 847-759-5103
	ATT/T-TCG JIM EVERETT	770-750-6181
	MCI DEAN BOYERS	972-729-6322
ELECTRICITY	COMED JOLIET	630-576-7094
WATER & SEWER	METROPOLITAN WATER RECLAMATION DISTRICT CHICAGO JOE SCHUESSLER HANIF MUNSHI	312-751-3184
GAS	NICOR GAS UTILITY CONSULTANT	630-388-2362
CABLE TELEVISION	COMCAST MARTHA GIERAS	630-600-6352
CITY	CITY OF PARK RIDGE SARAH MITCHELL - CITY ENGINEER	847-318-5455
	FOREST PRESERVES OF COOK COUNTY	ERIC OTTO 708-771-1382
	WIDE OPEN WEST PAUL FLINKOW	630-536-3139
	LEVEL 3 COMMUNICATIONS NETWORK RELOCATIONS	877-366-8344x2
	XO ILLINOIS INC. RANDY WOOD	630-371-3159
EXELON	STAKE CENTER LOCATING	801-364-1063
COMED	USIC LOCATING SERVICE	773-851-6403
COMED BURIED FIBER CABLE	G4S TECHNOLOGY LLC RAYMOND GREGOR	630-343-2826
	ZAYO FIBER SOLUTIONS TIM PAYMENT	630-203-8003
	REDSPEED ILLINOIS, LLC JOSE CHAVEZ	630-317-5705
	SIDERA NETWORKS MATT COPE	312-432-0076

SUMMARY OF QUANTITIES

CODE NO.	PAY ITEM	UNIT	QUANTITY
20100110	TREE REMOVAL (6 TO 15 UNITS DIAMETER)	UNITS	112
20100210	TREE REMOVAL (OVER 15 UNITS DIAMETER)	UNITS	18
20101000	TEMPORARY FENCE	FOOT	640
20101400	NITROGEN FERTILIZER NUTRIENT	POUND	17
20101500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	17
20101600	POTASSIUM FERTILIZER NUTRIENT	POUND	17
20201200	REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL	CU YD	40
25000312	SEEDING, CLASS 4A	ACRE	0.18
* 25100630	EROSION CONTROL BLANKET	SQ YD	881
28000400	PERIMETER EROSION BARRIER	FOOT	1348
28200200	FILTER FABRIC	SQ YD	148
* X5012503	CONCRETE REMOVAL	L SUM	1
67100100	MOBILIZATION	L SUM	1
* NR105001	CONSTRUCTION STAKING	L SUM	1
* NR280005	FLOATING SILT CURTAIN, TYPE 3	L SUM	1
* NR281000	CAUSEWAY	L SUM	1
* NR281001	AGGREGATE FOR TEMPORARY ACCESS	L SUM	1
* NR512001	SHEET PILE REMOVAL	SQ FT	270
* NR704001	TRAFFIC CONTROL AND PROTECTION, SPECIAL	L SUM	1
* NR720001	WOOD INFORMATION SIGNS	EACH	2

* INDICATES NON-STANDARD ITEM COVERED BY SPECIAL PROVISIONS