

WITNESS MARKER FOR PERMANENT SURVEY MARKERS TYPE II



REVISED 1-31-00

INFORMATIONAL WARNING SIGN FA. SECTION COUNTY SHEETS NO. 101 AL. SHEET

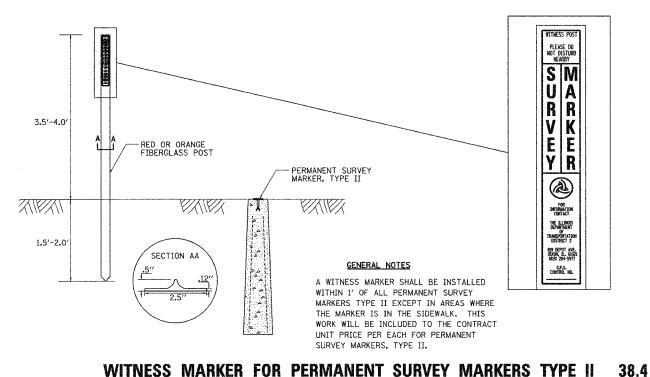

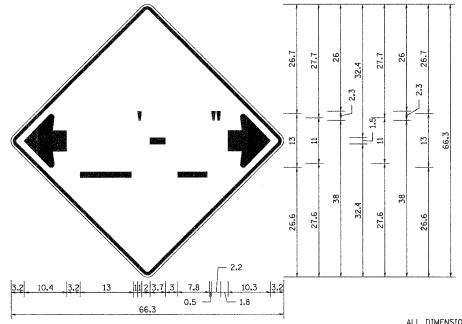

W12-2 - Horizontal Clearance Sian 48.0" across sides, 1.9" Radius, 0.8" Border, 0.5" Indent, Black on Orange: Standard Arrow Custom 10.4" X 8.1" 180° Black 11 Inch D Series Lettering: Standard Arrow Custom 10.4" X 8.1" 0°


All work to furnish and install these signs shall be included in the cost of the Traffic Control Standards and shall not be paid for separately.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

INFORMATIONAL WARNING SIGN (FOR NARROW TRAVEL LANES) 39.4

REVISED 6-29-05

REFERENCE MARKERS

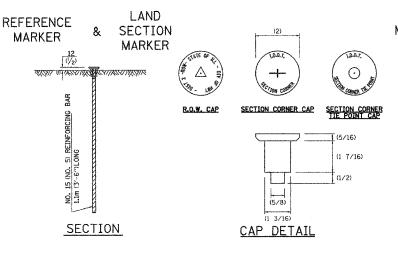


METHOD OF REFERENCING POINTS

REFERENCE MARKERS SHALL BE USED TO TIE IN PERMANENT LAND SECTION AND 1/4 SECTION CORNERS. WHERE LAND SECTION MARKERS FALL IN THE SHOULDERS OR GRAVEL SURFACES, THE TOP OF THE BAR SHALL BE KEPT 75(3) BELOW THE SURFACE. LAND SECTION MARKERS LOCATED IN TRAFFIC LANES SHALL NOT BE REPLACED.

METAL CAPS SHALL BE PLACED ON TOP OF THE REINFORCEMENT BAR. THERE ARE 3 TYPES OF CAPS, ONE FOR THE RIGHT-OF-WAY CORNERS, ONE FOR THE SECTION CORNERS AND ONE FOR THE SECTION CORNER TIE POINTS. THE CAPS WILL BE SUPPLIED BY IDOT, CALL CHIP CORDELL (815) 284-5370 A MINIMUM OF ONE WEEK BEFORE THE CAPS ARE NEEDED

METHOD OF REFERENCING MARKERS



- USE INSTRUMENT TIES TO NEARBY LAND-MARKS (STEEPLES, TOWERS, SILOS, ETC ...) IN CULTIVATED FIELDS, SET 600(2")
- OR MORE BELOW GROUND SURFACE.
- IN FENCE LINE OR PROTECTED AREA SET TOP AT GROUND LEVEL.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS

TREE REPLACEMENT SCHEDULE

SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	LOCATION	QUANTITY
TILIA AMERICANA	AMERICAN LINDEN / BASSWOOD	1 3/4" CALIPER, BALLED & BURLAPPED	EACH	TBD	3
A4					
			· · · · · · · · · · · · · · · · · · ·		
		,		·	
	1				

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED 5-15-91

REFERENCE MARKERS

63.4

TREE REPLACEMENT SCHEDULE

90.4