



SEE STANDARD 424001 FOR SIDE FLARE DETAIL & SEE PLANS FOR RAMP TYPE.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

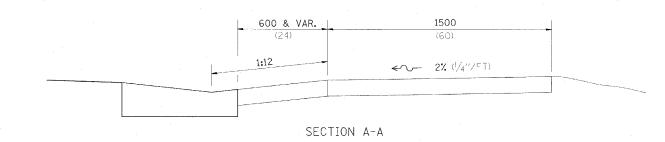




SECTION B-B

NOTES: THIS DETAIL TO BE USED IN CONJUNCTION WITH STATE STANDARD 424001. THE MAXIMUM ALLOWABLE CROSS SLOPE FOR SIDEWALK IS 2% (1/4"/FT). THE MAXIMUM ALLOWABLE SIDEWALK GRADE IS 8% (1/12"/FT). IF SPACE LIMITATIONS PROHIBIT THE USE OF THE 1:12 SLOPE, THEN SLOPES BETWEEN 1:10 ARE 1:12 ARE PERMITTED FOR A MAXIMUM RISE OF 150 (6). SLOPES 1:8 AND 1:10 ARE ALLOWED FOR A MAXIMUM RISE OF 75 (3). SLOPES STEEPER THAN 1:8 ARE NOT PERMITTED. THE DEPRESSED CURB IS NOT STANDARD, THE RISE IS 13 (1/2) INSTEAD OF 40 (11/2).

DISABLED RAMP DETAIL

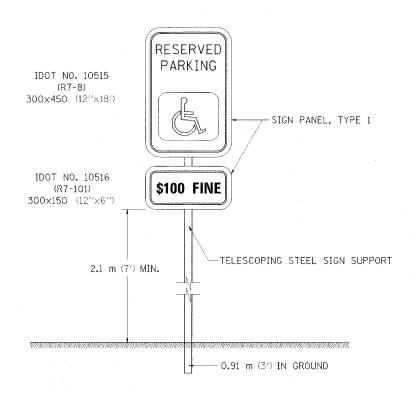

NOTES

THE SIGN PANEL AND SIGN SUPPORT SHALL BE PLACED AT EACH DISABLED PARKING STALL. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE METER (SQUARE FOOT) FOR SIGN PANEL, TYPE 1 AND PER METER (FOOT) FOR TELESCOPING STEEL SIGN SUPPORT.

QUANTITIES

3.6 m (12 FT) OF SIGN SUPPORT AND 0.2 m² (2 SQ FT) OF SIGN PANEL IS REQUIRED AT EACH LOCATION.

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED

RESERVED PARKING SIGN DETAIL

ILLINOIS DEPARTMENT OF TRANSPORTATION

CONSTRUCTION

DETAILS

SCALE: VERT.

DRAWN BY CHECKED BY R

DATE = SDATES

NAME = SFILELS

SCALE = SSCALES

RENCE = SREFS