

NOTES: 1. USE 16 GAUGE STEEL FOR CABINET.


- 2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
- 3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
- 4. ALL EDGES SHALL BE GROUND SMOOTH.
- 5. TWO (2" DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
- 6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
- 7. 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
- 8. 4 EACH PLAIN STEEL, NON-REMOVABLE PIN, NO HOLE 4"X4" SQUARE CORNER HINGES TO BE WELDED ON.
- 9. 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 7 1/4 " HASPS TO BE WELDED ON.

-FLAT STOCK DIMENSIONS VARY DEPENDING ON TYPE OF ROLLER ASSEMBLY.

LOCKABLE COMPUTER CABINET

670-1


CONTRACT NO. 66364

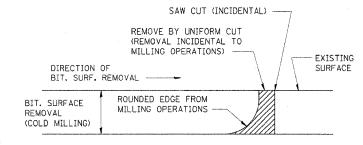

NOTE: WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE,
THEN A SAW CUT SHALL BE USED TO MANUFACTURE
A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL.
THE ENGINEER SHALL BE THE SOLE JUDGE
CONCERNING THE USE OF THIS DETAIL

BITUMINOUS DETAIL AT BUTT JOINTS

406-8

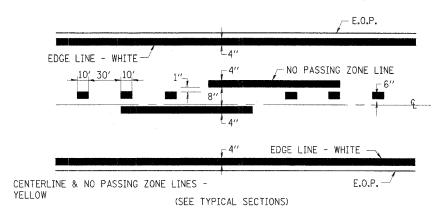

PAVEMENT MARKING

780-8

MISCELLANEOUS DETAILS

IL. RTE. 71 OVER UNNAMED STREAM F.A.P. RTE. 627 - SECTION 1BR LaSALLE COUNTY STA. 14+08.00 STR. NO. 050-0244

4440 ASH GROVE SPRINGFIELD, IL. 62707 (217) 793-8600 pashc@famyid.com

OZYURT AND STONE, INC.

JOB NO.: 0306,4 FILE: DETO2.DGN DATE: 07-20-05

STANDARDS\GENERAL\RPLAN.DGN 1:1 7-17-98

2" ACCESS HOLES IN

REAR OF CABINET