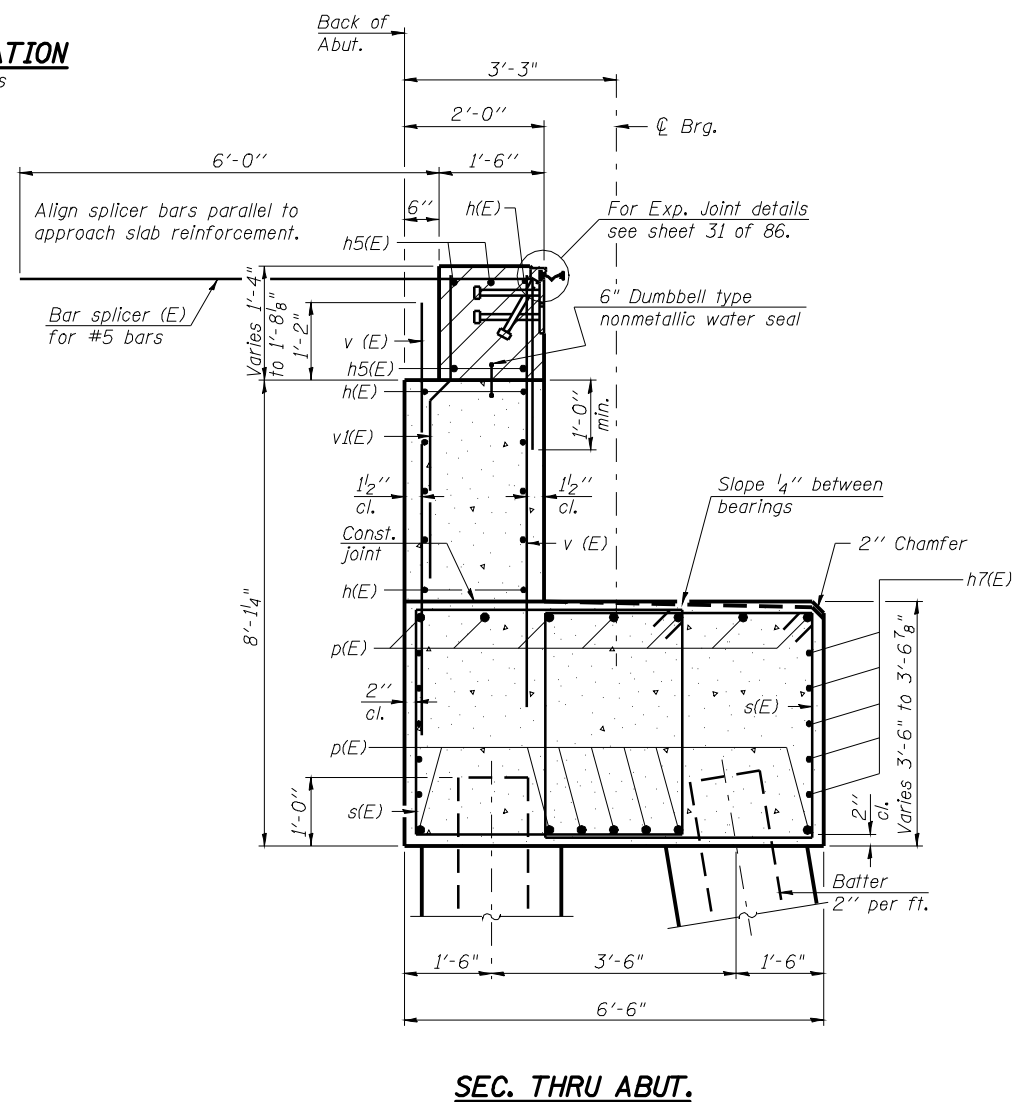
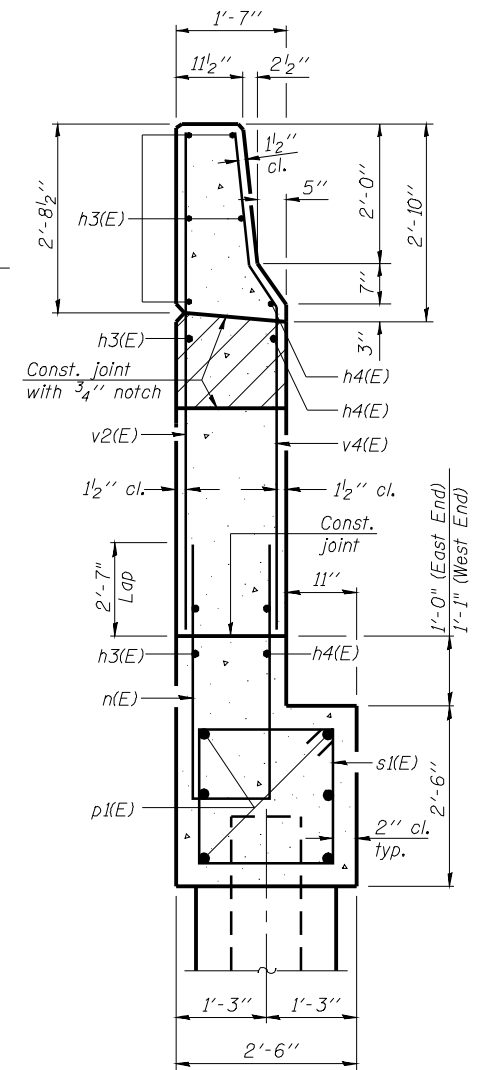
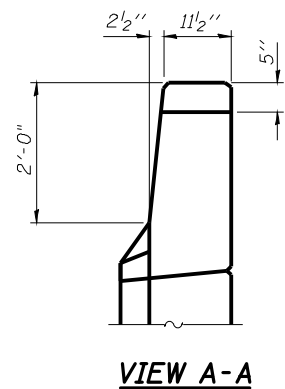


Notes:
Hatched area to be poured after superstructure false work has been removed. Quantity of concrete included with Concrete Superstructure. Space reinforcement in cap to miss anchor bolts. Four steps monolithically with cap. Quantity of concrete in end post included with Concrete Superstructure on sheet 19 of 86. For Concrete Encasement details, see sheet 71 of 86.

NORTH ABUTMENT - DETAILS
F.A.P. 614 (IL 78) OVER SANGAMON RIVER
PUBLIC WATERS
CASS & MASON COUNTIES
SECTION 144 (B-1)
STA. 913+26.00
STRUCTURE NUMBER 009-0510

© Copyright Hanson Professional Services Inc. SMS_YEAR\$		JOB NO. 07S2026
 HANSON Hanson Professional Services Inc.		DATE 03/27/09