

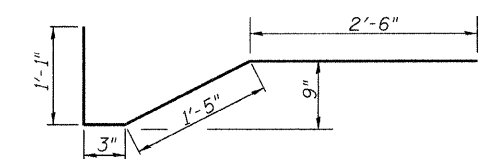


* Bend b(E) at rail post anchors to maintain cover.

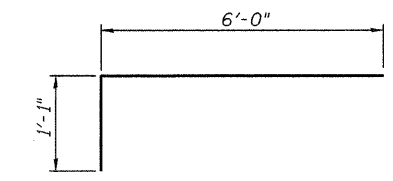

**SUPERSTRUCTURE
BILL OF MATERIAL**

Bar	No.	Size	Length	Shape	
a(E)	131	#5	29'-9"	—	
a1(E)	85	#5	28'-9"	—	
a2(E)	180	#6	7'-1"	┌	
a3(E)	4	#5	30'-9"	—	
a4(E)	132	#5	5'-3"	└	
b(E)	93	#5	24'-11"	—	
b1(E)	64	#5	37'-4"	—	
m(E)	6	#6	30'-8"	—	
m1(E)	20	#6	8'-4"	—	
m2(E)	4	#6	1'-10"	—	
m3(E)	8	#6	6'-7"	—	
s(E)	64	#4	8'-10"	U	
Reinforcement Bars, Epoxy Coated				Pound	15,280
Concrete Superstructure				Cu. Yds.	74.1

① See Special Provisions

**SUPERSTRUCTURE DETAILS
COUNTY HIGHWAY 10 OVER
FOUNTAIN CREEK TRIBUTARY
SEC. 07-00216-01-BR
IROQUOIS COUNTY
STATION 20+02.60**