



METAL SHELL PILE TABLE

Designation and outside diameter	Wall thickness t	Weight per foot (Lbs./ft.)	Inside volume (yd. ³ /ft.)
PP12	0.179''	22.60	0.0274
PP12	0.250"	31.37	0.0267
PP14	0.250"	36.71	0.0368
PP14	0.312"	45.61	0.0361

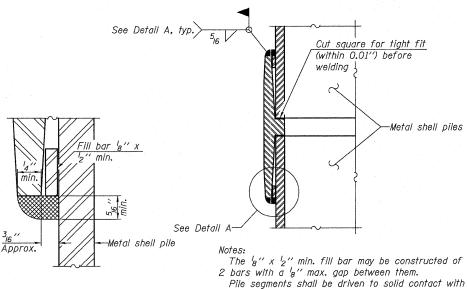

DETAIL A

splicer before welding. WELDED COMMERCIAL SPLICE

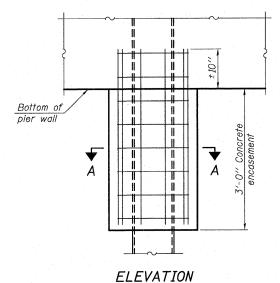



2'-6" Welded wire fabric 6 x 6-W4.0 x W4.0 weighing 58#/100 sq. ft. Bend as required to fit into the pier wall Metal shell pile

SECTION A-A

Forms for encasement may be omitted when soil conditions permit.

CONCRETE ENCASEMENT AT PIERS

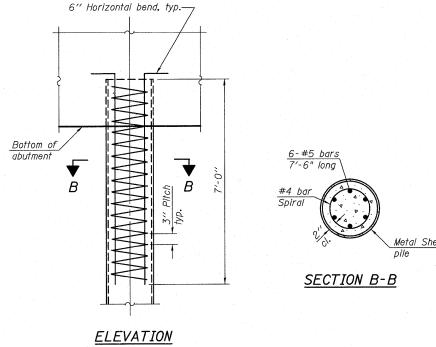


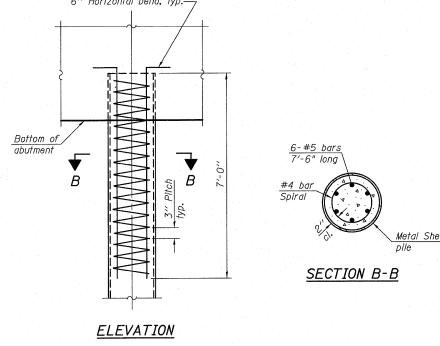

METAL SHELL REINFORCEMENT AT ABUTMENTS

Metal shell pile " End plate Shop or field weld s = t - 16"

END PLATE ATTACHMENT

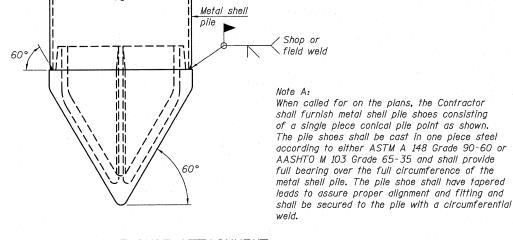

METAL SHELL PILE SHOE ATTACHMENT

(See Note A)

COMPLETE PENETRATION WELD SPLICE

* Field fabricated backing ring may be made from pile shell by removing segment to allow reducing circumference and vertically rejoin with partial joint penetration weld.

Field fabricated

or commercial

backing ring

The metal shell piles shall be according to ASTM A 252 Grade 3.

*Shop or

∫ field weld



7-1-10

	USER NAME =	DESIGNED	REVISED
		CHECKED	REVISED
	PLOT SCALE =	DRAWN	REVISED
	PLOT DATE =	CHECKED	REVISED
-			

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

METAL SHELL PILE DETAILS STRUCTURE NO. 019–0048		SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		126(B-1)BR	DEKALB	62	35
			CONTRACT	NO. (66987
SHEET NO. 17 OF 20 SHEETS		ILLINOIS FED.	AID PROJECT		