

| | | | | |
|-------------|---------|--------------------|--------------|-----------|
| F.A.U. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| 6791 | 126RS-4 | KNOX | 76 | 1 |
| ILLINOIS | | CONTRACT NO. 68B65 | | |

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

**PROPOSED
HIGHWAY PLANS**

FAU ROUTE 6791 (US 150)
SECTION 126RS-4
PROJECT ACF-6791(004)
3P PROJECT
KNOX COUNTY

C-94-022-14

- INDEX OF SHEETS**
- 1 COVER SHEET
 - 2 COMMITMENTS /GENERAL NOTES /MIX REQUIREMENTS
 - 3-9 SUMMARY OF QUANTITIES
 - 10-13 SCHEDULE OF QUANTITIES
 - 14 LINE DIAGRAM
 - 15-19 TYPICAL SECTIONS
 - 20-36 GENERAL PLAN SHEETS
 - 37-52 PROPOSED PAVEMENT MARKINGS
 - 53-59 INTERCONNECT, DETECTOR LOOPS & PAY ITEMS
 - 60-63 CRASHWALL EXTENSION (S.N. 048-0021 & 048-0022)
 - 64-65 BRIDGE DECK REPLACEMENT DETAIL
 - 66-76 DISTRICT CADD STANDARDS

HIGHWAY STANDARDS:


| | | |
|-----------|-----------|-----------|
| 424001-07 | 701101-04 | 701901-03 |
| 442101-07 | 701411-08 | 704001-07 |
| 631011-09 | 701423-07 | 780001-04 |
| 631026-05 | 701426-06 | 781001-03 |
| 631031-12 | 701456-03 | 886001-01 |
| 631032-08 | 701602-07 | 886006-01 |
| 631033-05 | 701701-09 | |
| 631046-04 | 701801-05 | |
| 635006-03 | | |
| 635011-02 | | |

TRAFFIC DATA:

ADT: 14,400 /2013
MU%: 2.52
SU%: 4.83

DESIGN DESIGNATION:


ROUTE TYPE: OTHER PRINCIPLE /MINOR ARTERIAL
TRUCK ROUTE: CLASS 2

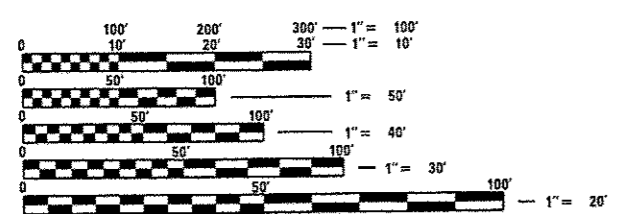

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: ANNA BERGSIEKER (309) 671-3471
PROJECT MANAGER: RICH DOTSON (309) 671-3455
CATALOG NO. 035031-00D
CONTRACT NO. 68B65

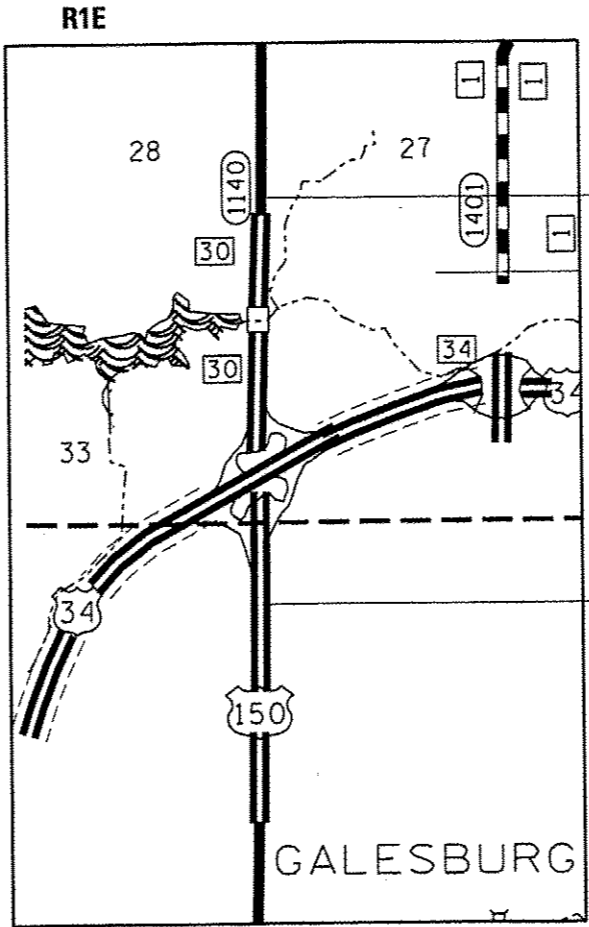

IMPROVEMENT BEGINS
STA. 418 + 09

IMPROVEMENT ENDS
STA. 503 + 55

GROSS LENGTH = 8,546 FT. = 1.619 MILE
NET LENGTH = 8,546 FT. = 1.619 MILE

D-94-005-14



LOCATION OF SECTION INDICATED THUS: - [shaded area] -

DESCRIPTION OF WORK:

This job consists of patching, milling, and overlaying 1.6 miles of US Route 150 from Home Blvd. to 0.25 miles north of North Lake Storey Road in Galesburg. Also included is the removal and replacement of guardrail, bridge deck rehabilitation on Lake Storey Bridge (S.N. 048-0029), and interconnect installation.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED MARCH 20 14

Joseph E. Crowley
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

May 9 20 14
John D. Baranzelli, PE
ENGINEER OF DESIGN AND ENVIRONMENT

May 9 20 14
Osman
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**