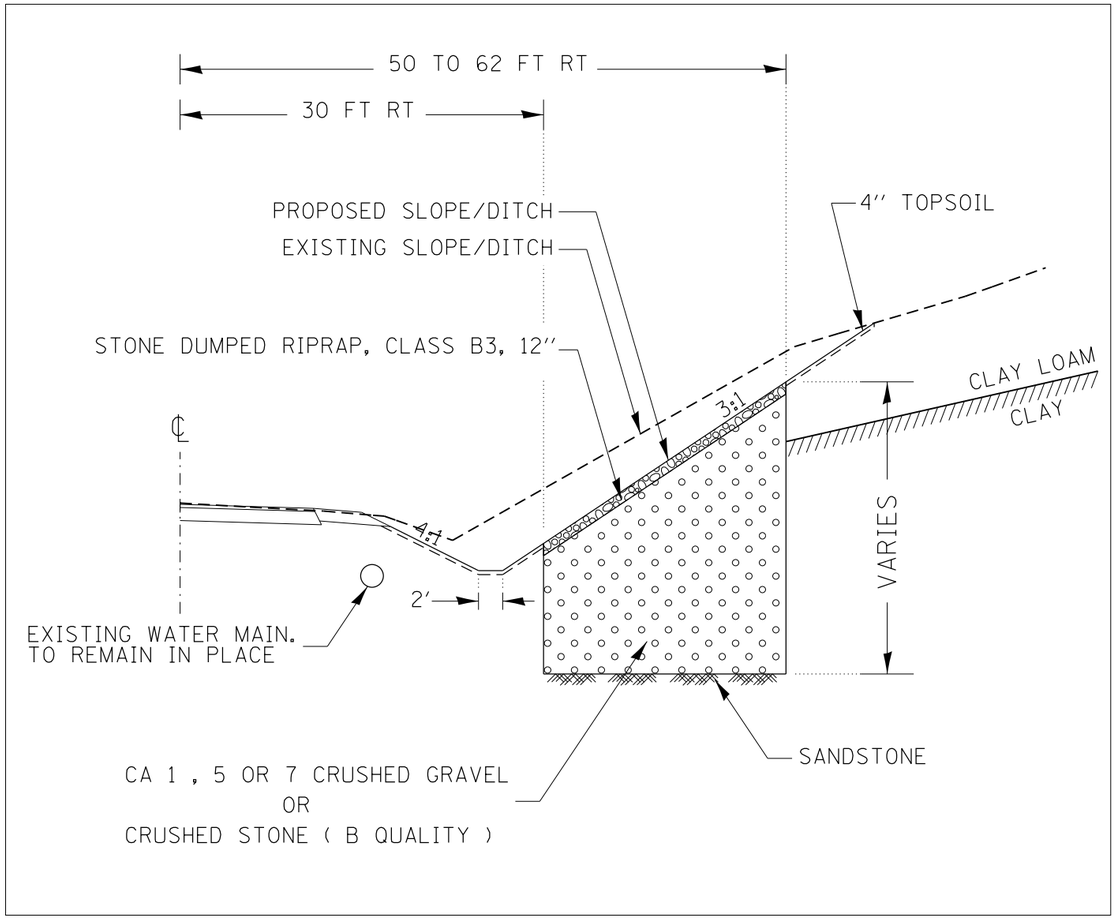

LOWER FRENCH DRAIN – DETAIL A

JOB SPECIFIC NOTES:

1. RESEED DISTURBED AREA, PROPERTY OWNER TO PROVIDE THE TYPE OF SEED TO BE USED FOR REESTABLISHING VEGETATION ON THE SLOPE. (CHOOSING THE TYPE OF SEED SHALL BE ADDRESSED DURING LAND ACQUISITION PROCESS)
2. NO TRENCH SHALL BE ALLOWED TO BE LEFT OPEN OVERNIGHT
3. NO FILTER FABRIC SHALL BE USED TO LINE ANY TRENCH.
4. EARTH MATERIAL PLACED ON THE PROPOSED SLOPE IS NOT TO BE COMPACTED

STAGINGS:

1. REMOVE EXCESS EARTH AND CONSTRUCT DETAIL A AT THE TOE FOR 20 FEET ONLY FROM STA. 15+90 TO STA. 16+10.
2. REMOVE EXCESS EARTH AND COMPLETELY INSTALL UPPER FRENCH DRAIN.
3. REMOVE EXCESS EARTH AND RESUME CONSTRUCTING LOWER FRENCH DRAIN FROM STA. 11+00 TO STA. 15+90

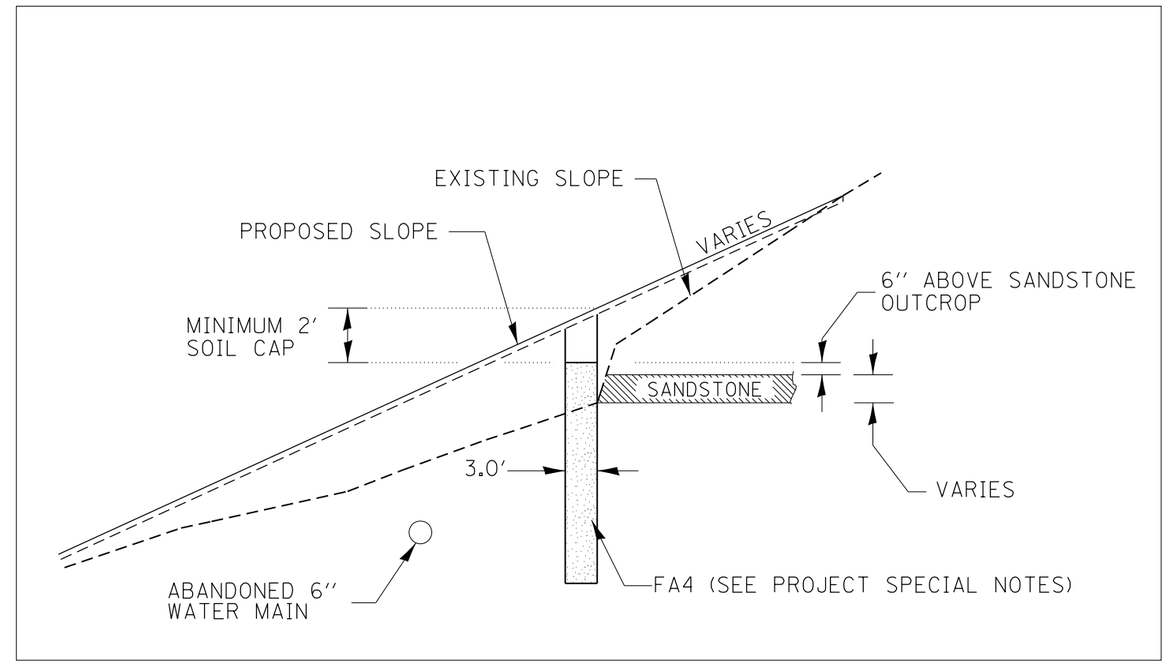

UPPER FRENCH DRAIN – DETAIL B

NOT TO SCALE

FILE NAME = Cover_GN_Plan_Erosion_SOQ_sheets.dgn	USER NAME = aubreygs	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	FRENCH DRAINS DETAILS	F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS / SHEET NO.
		DRAWN -	REVISED -			317	(18)I	FULTON	47 / 11
	PLOT SCALE = 50.000 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 68A25	
	PLOT DATE = 3/21/2013	DATE -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.		ILLINOIS	FED. AID PROJECT	