

WORK AREA


IMPACT ATTENUATORS, TEMPORARY
(FULLY REDIRECTIVE, NARROW), TEST LEVEL 3

TYPE III BARRICADE

TEMPORARY CONCRETE BARRIER

DRUM WITH STEADY BURN MONODIRECTIONAL LIGHT/
DIRECTION INDICATOR BARRICADE WITH STEADY BURN
MONODIRECTIONAL LIGHT (PER HWY. STD. 701401-05)

SIGN

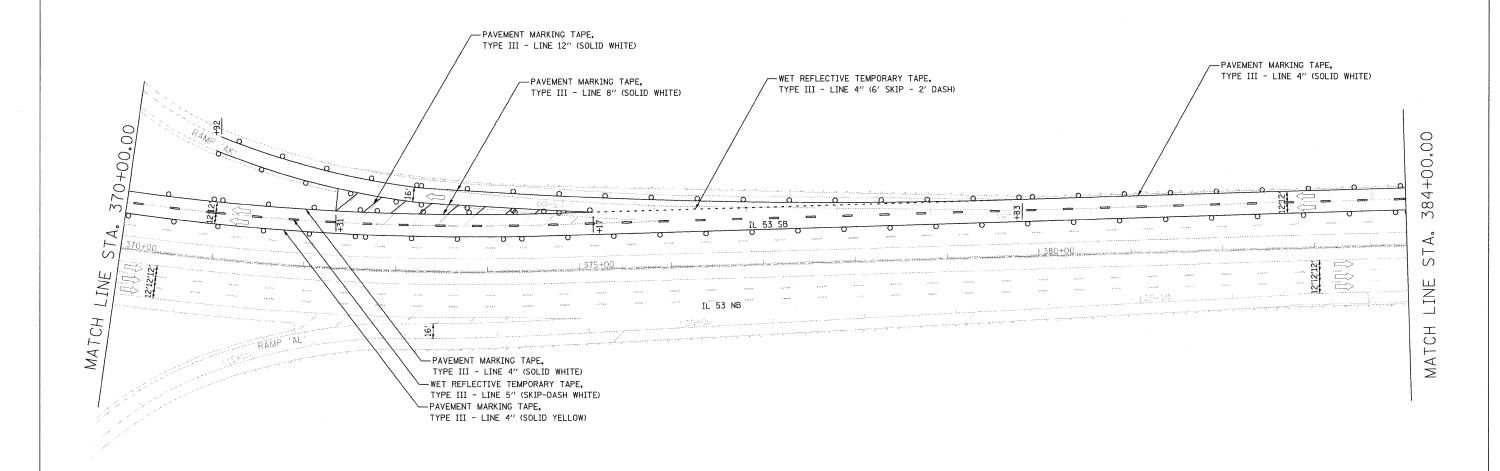



 VERTICAL PANELS TO BE PLACED EVERY 100' (CURVED SECTION) OR 200' (TANGENT SECTION) ON THE OUTSIDE SHOULDER WHERE THERE IS NO GUARD RAIL OR BARRIER PRESENT

					-	
0		50	1		10	00,
			OF STREET	1000	1986	•
	SCAL	.E:	$1^{\prime\prime}$	-	50′	

FILE NAME =	USER NAME = \$USER\$	DESIGNED - CRV	REVISED -		MAINTENANCE OF TRAFFIC PLAN STAGE 2 - SB SCALE: 1"=50' SHEET NO. 15 OF 21 SHEETS STA. 370+00 TO STA. 384+00		F.A.I.	SECTION	COUNTY	TOTAL SHEET	
\$FILEL\$		DRAWN ~ CRV	REVISED -	STATE OF ILLINOIS				290 (531-3.	.1. 0305-302 K) RS-5	COOK	314 /3/
·	PLOT SCALE = #SCALE#	CHECKED - FML	REVISED -	DEPARTMENT OF TRANSPORTATION					CONTRAC	T NO. 60138	
	PLOT DATE = \$DATE\$	DATE - 12/2009	REVISED -				STA. 370+00 TO STA. 384+00	FED. ROAD DIST	. NO. ILLINOIS FED. AI	PROJECT	