

- INSTALL A NONCORROSIVE DISC OF 2" MINIMUM DIAMETER WITH THE NUMBER PERMANENTLY STAMPED, CUT OUT, OR ENGRAVED UNDER THE HEAD OF THE BASE PLATE BOLT OR ATTACHED TO LIGHT FLANGE WITH SET SCREW.
- 2. LEGENDS SHOWN ARE FOR ILLUSTRATIVE PURPOSES ONLY. CONTRACTOR TO COORDINATE LEGEND WITH AIRPORT.
- 3. THE CONTRACTOR SHALL NUMBER THE EXISTING/ PROPOSED LIGHTS AND SIGNS IN EACH CIRCUIT STARTING AT THE HOMERUN CONTINUING AROUND THE ENTIRE CIRCUIT BACK TO THE HOMERUN.
- 4. AIRFIELD SIGNS SHALL BE TAGGED & NUMBERED.



### LIGHT IDENTIFICATION DETAIL


N.T.S.

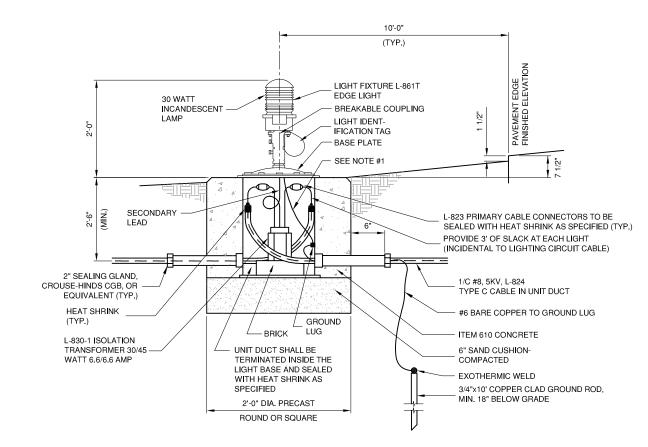

# BASE MOUNTED EDGE LIGHT NOTES

1. THE LIGHT FIXTURE SHALL BE BONDED TO THE LIGHT BASE INTERNAL GROUND LUG VIA A #6 AWG STRANDED COPPER WIRE RATED FOR 600 VOLTS WITH GREEN XHHW INSULATION. THE GROUND WIRE LENGTH SHALL BE SUFFICIENT TO ALLOW THE REMOVAL OF THE LIGHT FIXTURE FROM THE LIGHT BASE FOR ROUTINE MAINTENANCE. SEE THE LIGHT FIXTURE MANUFACTURER'S INSTRUCTIONS FOR PROPER METHODS OF ATTACHING THIS BONDING WIRE.

## BASE MOUNTED EDGE LIGHTS



#### **DUCT BANK NOTES**

- 1. DIMENSIONS SHOWN ARE MINIMUM.
- 2. TOP OF CONCRETE ENCASEMENT TO BE NOT LESS THAN 18" BELOW FINISHED
- 3. DUCT CONCRETE SHALL BE ITEM 610 STRUCTURAL P.C.C. CONCRETE.
- 4. ALL DUCT SHALL BE 4" INSIDE DIAMETER.
- 5. LOCATIONS SHOWN ARE APPROXIMATE. DUCT BANKS SHALL BE INSTALLED AT LOCATIONS DESIGNATED BY THE ENGINEER.
- 6. CONTRACTOR SHALL INSTALL DUCT BANKS AT A DEPTH WHICH WILL NOT CONFLICT WITH ELEVATION SENSITIVE UTILITIES.
- A PULL WIRE SHALL BE PROVIDED IN EACH UNUSED CONDUIT. UNUSED DUCT SHALL BE SEALED WITH PVC PLUGS/CAPS TO THE SATISFACTION OF THE ENGINEER.
- 8. DUCT BANKS SHALL EXTEND A MINIMUM OF 5' BEYOND THE NEW EDGE OF PAVEMENT.

DUCT BANK DETAIL

FILE: SAR4224-EL502.dwg JPDATE BY: Chris Groth PLOT DATE: 4/26/2013 2:21 PM

# **SP023**

REVISIONS		
NUMBER	BY	DATE
0	1	2

THIS BAR IS EQUAL TO 2' AT FULL SCALE (34X22).

'A COMMUNITY AIRPORT HUNTER FIELD SPARTA, ILLINOIS S **DETAIL**( **EXTENSION** ELECTRICAL TAXIWAY

CRAWFORD, CONSULTING

SPARTA



DESIGN BY: CBG DRAWN BY: CMT CET CHECKED BY: CET APPROVED BY: MARCH 1, 2013 JOB No: 1241201

> IL. PROJ. NO. SAR-4224 SBG NO. 3-17-0094-B11

SHEET 15 OF 28 SHEETS