

STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths						
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4		
3, 4	1'-5"	1'- 11''	2'-1"	2'-4"		
5	1'-9''	2'-5"	2'-7"	2'-11"		
6	2'-1"	2'-11''	3'-1''	3'-6"		
7	2'-9"	3'-10''	4'-2"	4'-8''		
8	3'-8''	5'-1"	5′-5′′	6'-2"		
9	4'-7"	6'-5"	6'-10''	7'-9"		

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C


Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Threaded splicer bar length = min. lap length + $l_2^{\prime\prime}$ + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

Location	Bar size	No. assemblies required	Table for minimum lap length	

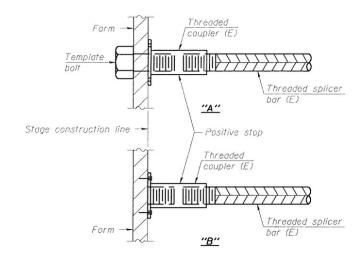


INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.
(E): Indicates epoxy coating.

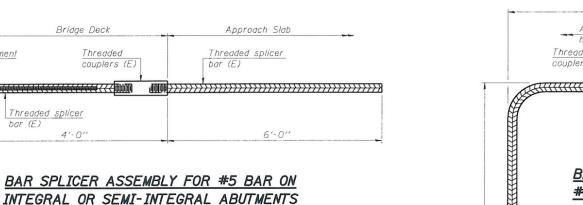


No. required = 62



BSD-1

Reinforcement

HURST-ROSCHE ENGINEERS, INC. PROFESSIONAL DESIGN NUMBER:18-000278

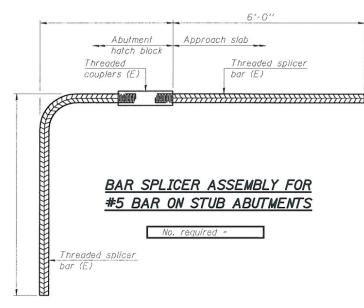

Reinforcement bar

STANDARD MECHANICAL SPLICER

No. assemblies required
28
76

NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See special provision for Mechanical Splicers.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS STRUCTURE NO. 010-0288

SHEET NO.18	F.A.I. RTE.	SECTION	COUNTY	TOTAL	SHEET NO.	
	74	(10-6)HBR-5	CHAMPAIGN	63	37	
20 SHEETS		SN 010-0288	CONTRACT	NO. 70	750	
	FED. ROAD DIST. NO. 5 ILLINOIS FED. AID PROJECT					