

## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

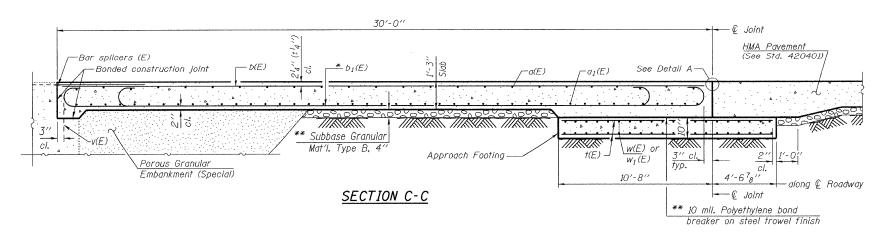

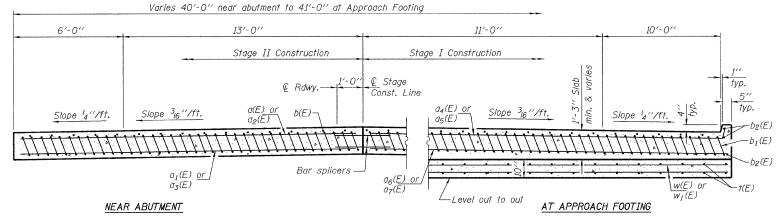


#### SECTION D-D


(See Plan for dimensions not shown)

\* Tilt #9  $b_1(E)$  bars as required to maintain clearance.

\*\* Cost included with Concrete Superstructure.

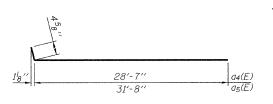

### BARS 04(E) & 05(E)

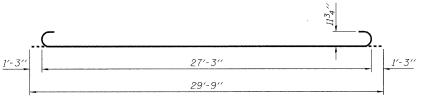

#### BAR b1(E)

		0070050 70 0000
DESIGNED	VHV	OCTOBER 30, 2009
CHECKED	DAB	EXAMINED & Carl Knyry
DRAWN	Kyle M. Steffen	PASSED Ralph E. Curlessan
CHECKED	VHV DAB	ENGINEER OF BRIDGES AND STRUCTURES

#### a(E) #4 28'-7" a1(E) a2(E) #4 33 #5 a3(E) 31'-8'' a4(E) #4 a5(E) #5 a6(E) a7(E) b(E) 96 #9 29'-9'' b1(E) #4 b2(E) t(E) 80 #4 14'-11'' w(E)#5 $W_I(E)$ 42 29'-4" Cu. Yd. Concrete Superstructure 19.3 Concrete Structures Cu. Yd. Reinforcement Bars, 17990 Pound Epoxy Coated Porous Granular Cu. Yd. 152 Embankment (Special) Geocomposite Wall Drain Sq. Yd. Pipe Underdrain for 72 Feet Structures, 4'' Temporary Soil Sq. Ft. 70 Retention System Structure Excavation

BILL OF MATERIAL

Rar


Size Length Shape

Embankment (Special) Approach slab. Excavation for placing Porous Granular Embankment (Special) Geocomposite is paid for as Structure Wall Drain Excavation. \*\*\* Geotechnical Fabric for French Drains \*\*\* Drainage Aggregate \*\*\* 4" Perforated pipe drain 2'-0" \*\*\* Included in the cost of Bk. of Abut. Pipe Underdrains for Structures.

Backfill with Porous Granular

# SECTION THRU PILE SUPPORTED STUB ABUTMENT (Horiz, dim. @ Rt. 1 's)

All drainage system components shall extend parallel to the abutment back wall until they intersect the wingwalls or 2'-0" from the end of the wingwalls when the wings are parallel to the abutment. The pipe shall extend under the wingwall, if necessary, until intersecting the side slopes. The pipes shall drain into concrete headwalls. (See Article 601.05 of the Standard Specifications and Highway Standard 601101).

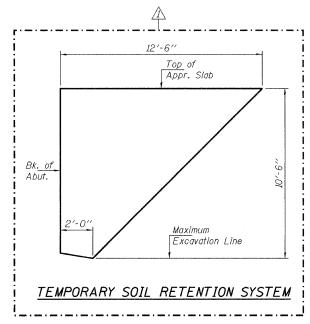

NOTES:

See sheet 19 of 21 for Detail A.

Approach Slab shall be paid for as Concrete Superstructure.

Approach Footing concrete shall be paid for as Concrete Structures.

Reinforcement shall be paid for as Reinforcement Bars, Epoxy Coated.

The Approach Footing maximum applied service bearing pressure (Qmax) = 2.0 ksf.

For Bar Splicer details, see sheet 21 of 21.

Cost of excavation for Approach Footing included with Concrete Structures.

EAST APPROACH DETAILS SN 058-0095

SH	SHEET NO.20	F.A.I. RTE.	SECTION					COUNTY	TOTAL SHEETS		SHEE NO.
	011221 140125	72	66(B,HVB,HB-1)BR					MACON	83		64
	21 SHEETS				CONTRACT	NO.	74	343			
		FED. RC	AD D	IST.	NO.	ILLINOIS	FED.	AID PROJECT			