

06-14-2019 LETTING ITEM 202

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROPOSED
HIGHWAY PLANS

FAI ROUTE 57 (I-57)
SECTION D9 PATCH AND BIT RESURF 2019-1
PROJECT NHPP-8AWD(816)
PATCH AND RESURFACING
FRANKLIN/JEFFERSON COUNTIES

C-99-057-19

FOR INDEX OF SHEETS, SEE SHEET NO. 3

FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 4-5

TRAFFIC DATA

2016 ADT 39,300 WITH 30% TRUCKS

TOWNSHIPS

DENNING, BROWNING, BARREN,
EWING, SPRING GARDEN

DESIGN DESIGNATION : NA

COORDINATE SYSTEM : NA

POSTED SPEED : 70 MPH

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-692-0123
OR 811

PROJECT ENGINEER: VALERIE ROLLA
PROJECT DESIGNER: MELISSA COLE

CONTRACT NO. 78728

GROSS LENGTH = 21.4 MILES
NET LENGTH = 21.4 MILES


END PROJECT
NEAR BONNIE
SOUTH OF SN 041-7029
MP 87.4

BEGIN PROJECT
1 MILE NORTH OF
WEST FRANKFORT INTERCHANGE
MP 66

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57			16	1

**D9 Patch and Bit Resurf 2019-1
Franklin/Jefferson

D-09-035-19

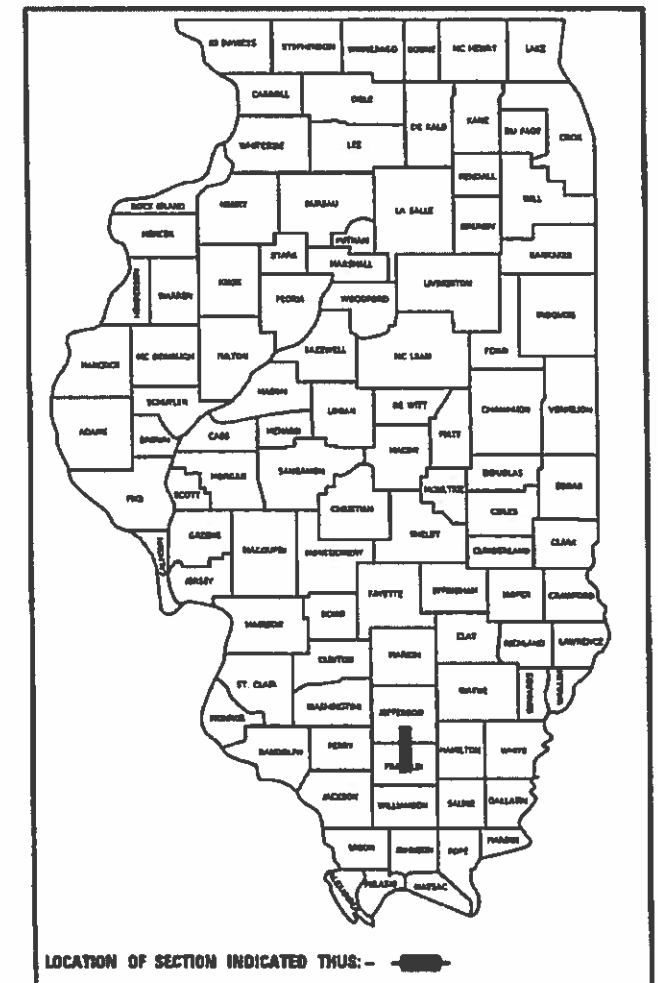

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 28 2019

Keith Roberts
REGION FIVE ENGINEER

May 10 2019
EA. Etk
ENGINEER OF DESIGN AND ENVIRONMENT

May 10 2019
Paul J. Chaf
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

REV. - MS

MODEL: D:\p104\p104.dgn
FILE NAME: p104.dgn
PROJECT: 17218-0001
SHEET: 17218-0001

Prepared By: Charles Stein
DISTRICT STUDIES & PLANS ENGINEER

Examined By: _____
DISTRICT LAND ACQUISITION ENGINEER

Examined By: Carrie Nolan
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: Kevin Kelly
DISTRICT OPERATIONS ENGINEER

Examined By: Keith Roberts
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: Dan J. J. J.
DISTRICT CONSTRUCTION ENGINEER

Examined By: R. C. C.
DISTRICT MATERIALS ENGINEER

	USER NAME = c:\admin	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNATURE SHEET				F.A.I. ATE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						57	**	.	16	2
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -						CONTRACT NO. 78728				
	PLOT DATE = 3/25/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

MODEL: Default
FILE NAME: p:\s\blamroom\dot.illinois\rev\PWIDOT\Documents\IDOT_Offices\District_9\Projects\78728\CADDData\CADSheets\78728-Sheets.dgn

SHEET NO	DESCRIPTION
1	COVER SHEET
2	SIGNATURE SHEET
3	INDEX OF SHEETS, HIGHWAY STANDARDS, COMMITMENTS, GENERAL NOTES, MIX DESIGN
4	MTD CROSSING RESTRICTIONS
5-6	SUMMARY OF QUANTITIES
7-9	TYPICAL SECTIONS: I-57
10-11	PAVEMENT MARKING SCHEDULE
12-13	PAVEMENT SCHEDULE
14-15	PATCHING SCHEDULE
16	DETAILS: INLAY

HIGHWAY STANDARDS

000001-07_STANDARDSYMBOLSABBREVIATIONS&PATTERNS
001001-02_AREASOFREINFREBARS
001006_DECIMALOFINCH&FOOT
420701-03_PAVEMENTWELDEDWIREREINFORCEMENT
442101-09_CLASSBPATCHES
701400-09_APPRCHTOLNCLOSURE-FRWAYEXPWAY
701401-12_LNCLOSUREFRWAYEXPWAY
701411-09_LNCLOSUREMULTILN-ENTROREXITRAMP45MPHORMORE
701426-09_LNCLOSUREMULTILN-INTERMITTANTORMOVINGOP45MPHORMORE
701428-01_TRAFFICCONTROLSETUPREMOVALFREEWAYEXPRESSWAY
701901-08_TRAFCNTRLDEVICES
780001-05_TYPICALPVTMRKINGS
781001-04_TYPICALAPPRAISEDREFLCPVTMRKRS

GENERAL NOTES

QUANTITIES SHOWN IN THE PLANS FOR PATCHING ARE ESTIMATES. THE ACTUAL AMOUNT OF PATCHING REQUIRED WILL BE DETERMINED BY THE ENGINEER.

FACTORS USED FOR ESTIMATING PLAN QUANTITIES ARE AS FOLLOWS AND SHALL NOT BE USED FOR THE BASIS OF FINAL QUANTITIES:

ALL HOT MIX ASPHALT 2.016 TONS/CU. YD.

IF ANY STAMPED STATION FALLS WITHIN THE PATCH AREA, THE NEW PATCH SHALL BE RESTAMPED. THE STATION SYMBOL STAMPS USED SHALL BE FURNISHED BY THE CONTRACTOR. THEY SHALL BE 5 1/2" TALL OF A DESIGN APPROVED BY THE ENGINEER, AND SHALL REMAIN THE PROPERTY OF THE CONTRACTOR.

THERE ARE NO AVAILABLE WASTE SITES ON THE EXISTING RIGHT OF WAY WITHIN THE PROJECT LIMITS. DISPOSAL WILL BE THE RESPONSIBILITY OF THE CONTRACTOR AND WASTE MUST BE DISPOSED OF IN ACCORDANCE WITH ARTICLE 202.03 OF THE STANDARD SPECIFICATIONS.

MIX DESIGN

Locations	Hot-Mix Asphalt Surface Course
Mixture Use(s):	Polymerized Hot-Mix Asphalt Surface Course, Mix E, N90
AC/PG:	SBS PG76-22
ABR % (Max):	See Special Provision
Design Air Voids:	4.0 %, 90 Gyration Design
Mixture (Gradation	IL-9.5mm
Friction	E Surface
Mixture Weight:	112 lbs/Sq Yd/in
Quality Management Program:	QCQA
Sublot Size:	NA

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, HIGHWAY STANDARDS, GENERAL NOTES, MIX DESIGN				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						57	**	*	16	3
	PLOT SCALE = 94.4444 ' / in.	CHECKED -	REVISED -		CONTRACT NO. 78728								
	PLOT DATE = 3/29/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS	FED. AID PROJECT

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson

MODEL Default
FILE Name: p:\publanroom\dat\illnls\gov\p\WIDOT\Documents\DOT Office\District 9\Projects\78728\CAOData\CAD\sheets\78728-Sheets.dgn

MTD CROSSING RESTRICTIONS TABLE

SN & CENTERLINE STATION ROUTE (I-57)	EXISTING FILL HEIGHT OVER BOX CULVERT	THICKNESS OF EXISTING PAVEMENT OVER BOX CULVERT	MTD CROSSING RESTRICTIONS
	FOOT	FOOT	
028-0001	N/A	N/A	EMPTY
028-0002	N/A	N/A	EMPTY
028-7099	2	1.7	EMPTY
028-7109	16.5	1.7	EMPTY
028-0006	N/A	N/A	EMPTY
028-0007	N/A	N/A	EMPTY
028-0079	N/A	N/A	EMPTY
028-0080	N/A	N/A	EMPTY
028-0081	N/A	N/A	EMPTY
028-0082	N/A	N/A	EMPTY
028-0011	N/A	N/A	EMPTY
028-0012	N/A	N/A	EMPTY
028-0013	N/A	N/A	EMPTY
028-0014	N/A	N/A	EMPTY
028-7116	1.8	1.7	EMPTY
041-7025	2	1.7	EMPTY
041-7028	2	1.7	EMPTY
041-0001	N/A	N/A	EMPTY
041-0002	N/A	N/A	EMPTY

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MTD CROSSING RESTRICTIONS			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					57	**	*	16	4
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 78728				
	PLOT DATE = 5/16/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

SUMMARY OF QUANTITIES

COUNTY:	FRANKLIN CO	JEFFERSON CO
ROUTE:	FAI 57 (I-57)	FAI 57 (I-57)
FUNDING:	90% FED/10% STATE	90% FED/10% STATE
LOCATION:	RURAL	RURAL

CODE NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QUANTITY		
				0006	0006
40600290	BITUMINOUS MATERIALS (TACK COAT)	POUND	88,362	45,118	43,244
40603570	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "E", N90	TON	21,994	11,230	10,764
44000157	HOT-MIX ASPHALT SURFACE REMOVAL, 2"	SQ YD	196,359	100,262	96,097
44200050	WELDED WIRE REINFORCEMENT	SQ YD	107	107	0
44201025	CLASS B PATCHES, TYPE IV, 14 INCH	SQ YD	107	107	0
44201299	DOWEL BARS 1 1/2"	EACH	88	88	0
44213200	SAW CUTS	FOOT	304	304	0
67100100	MOBILIZATION	L SUM	1	0.7	0.3
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	12	8	4
70100800	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	L SUM	1	0.7	0.3
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	42	21	21
70200100	NIGHTTIME WORK ZONE LIGHTING	L SUM	1	0.7	0.3
78004210	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B- INLAID - LINE 4"	FOOT	145,232	78,036	67,196

* SPECIALTY ITEM

REV. - MS

FILE NAME: PWD	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
		DRAWN -	REVISED -						57	**	*	16	5		
	PLOT SCALE = 94.4444 ' / in.	CHECKED -	REVISED -						CONTRACT NO. 78728						
	PLOT DATE = 4/1/2019	DATE -	REVISED -												
					SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT				

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson


MODEL: Default
FILE NAME: pw\\planroom.dot;ilinois.gov;PW\DOT\Documents\DOT Offices\District 9\Projects\78728\CADData\CADSheets\78728-Sheets.dgn

SUMMARY OF QUANTITIES - CONT

				COUNTY:	FRANKLIN CO	JEFFERSON CO
				ROUTE:	FAI 57 (I-57)	FAI 57 (I-57)
				FUNDING:	90% FED/10% STATE	90% FED/10% STATE
				LOCATION:	RURAL	RURAL
CODE NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QUANTITY			
				0006	0006	
* 78004230	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID - LINE 6"	FOOT	30,234	18,416	11,818	
* 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	1,531	933	598	
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	1,531	933	598	
Z0034105	MATERIAL TRANSFER DEVICE	TON	20,601	9,837	10,764	

* SPECIALTY ITEM

MODEL: Default
FILE NAME: p:\s\blanroom\dot\illinois\proj\PWIDOT\Documents\DOT Offices\District 9\Projects\78728\CADDData\CAD\Sheets\78728-Sheets.dgn

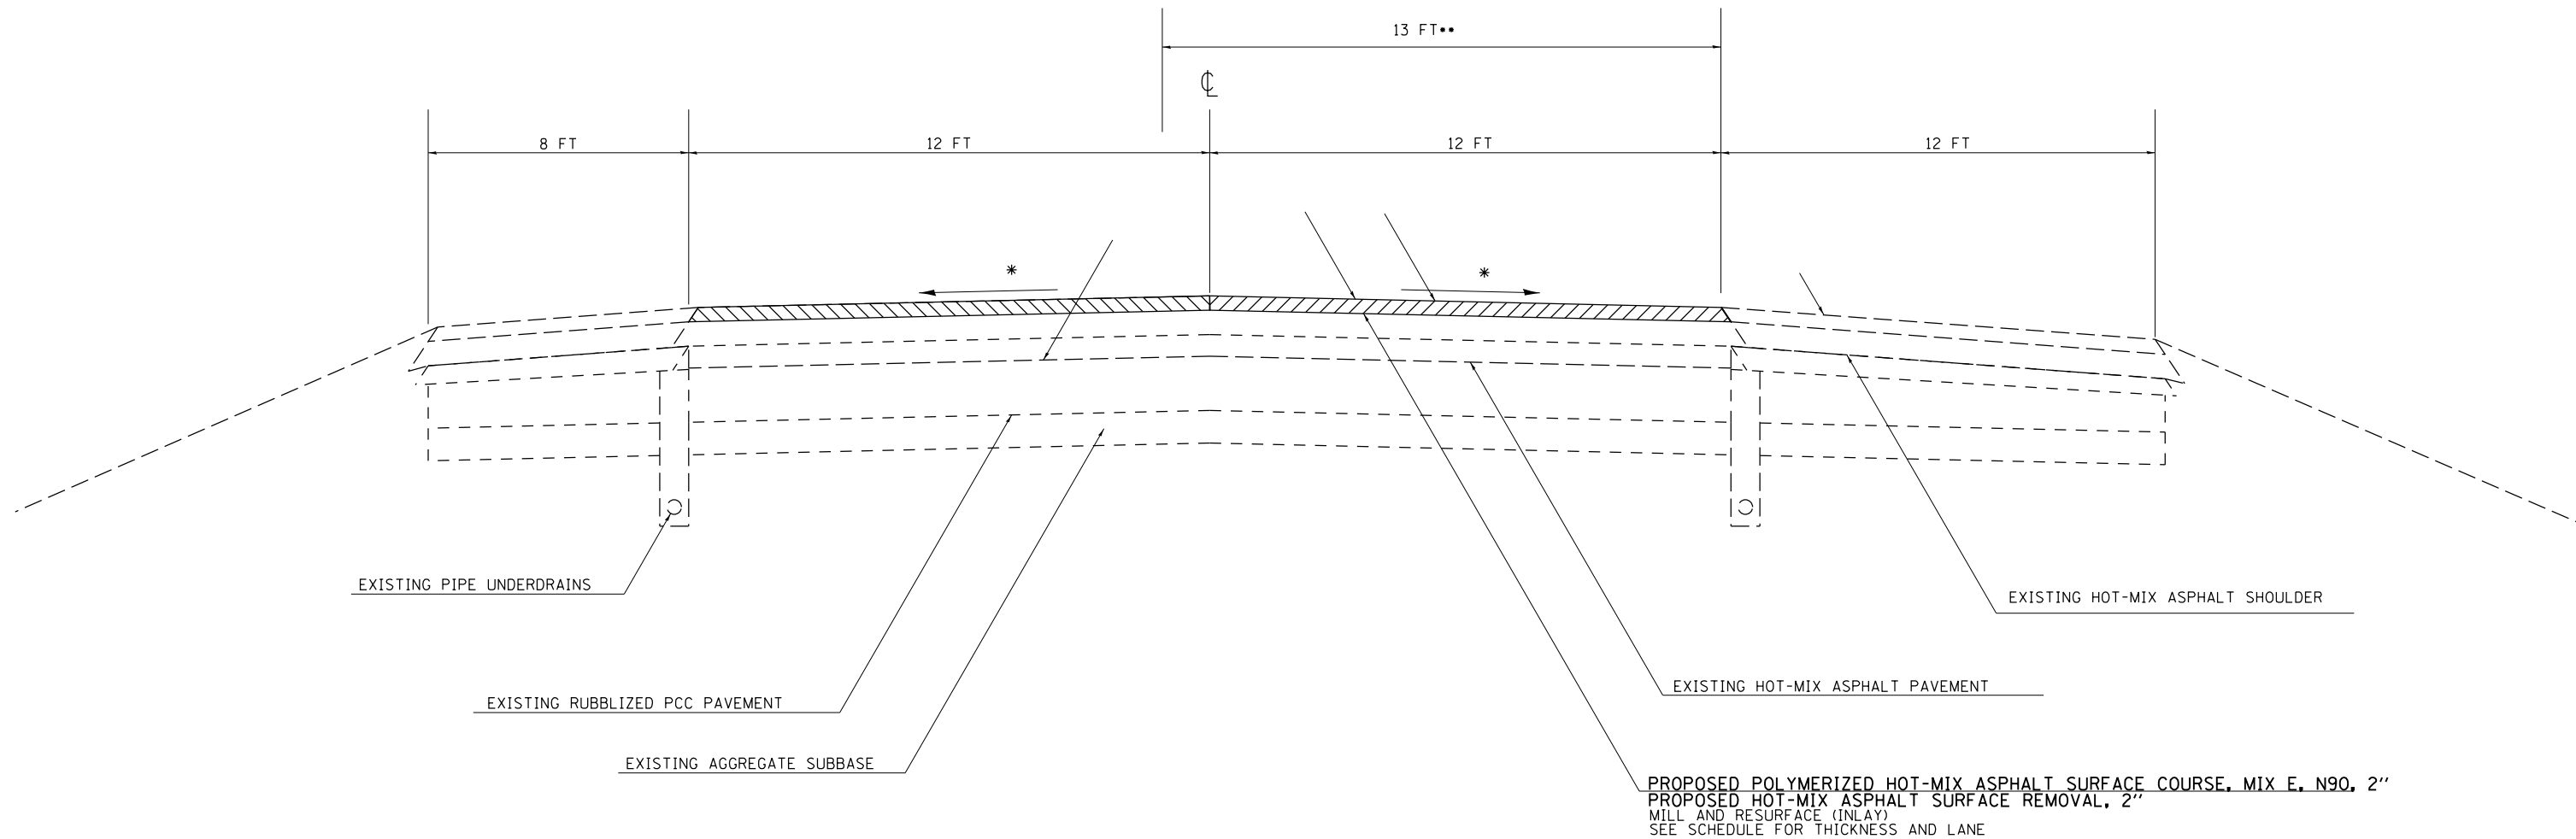


TO BE USED:
SEE SCHEDULE

- NOTES:
- * MATCH EXISTING CROSS SLOPE
 - ** MILL AND RESURFACE WIDTH VARIES

MODEL: Default
FILE NAME: p:\s\blanroom\dot\illinois\proj\p\WIDOT\Documents\DOT Offices\District 9\Projects\78728\CADDData\CAD\Sheets\78728-Sheets.dgn

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTION					F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -							57	**	*	16	7
	PLOT SCALE = 94.4444' / in.	CHECKED -	REVISED -							CONTRACT NO. 78728				
	PLOT DATE = 3/29/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.				
										ILLINOIS	FED. AID PROJECT			

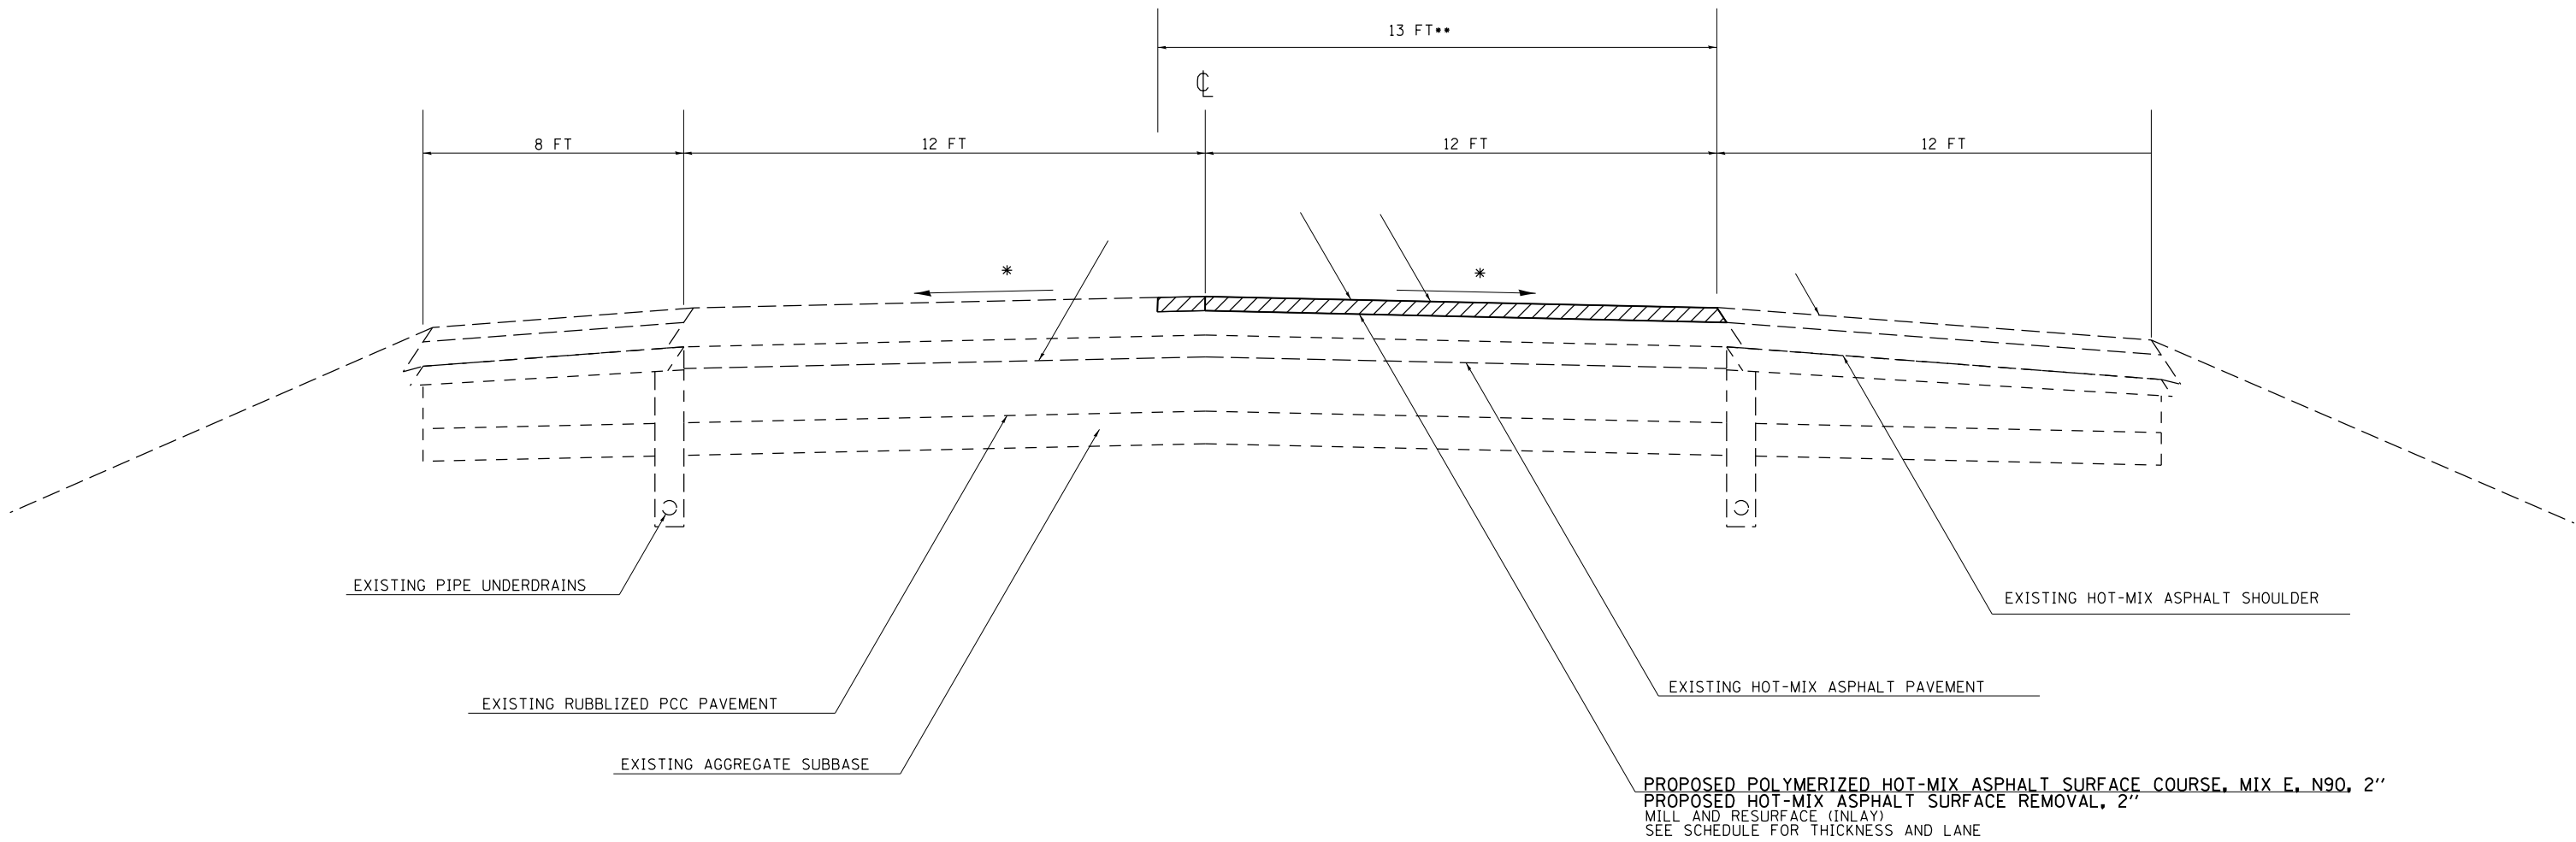

TO BE USED:
SEE SCHEDULE

- NOTES:
- * MATCH EXISTING CROSS SLOPE
 - * * MILL AND RESURFACE WIDTH VARIES


MODEL: Default
FILE NAME: p:\s\blanroom\dot\illinois\proj\pwid\DOT\Documents\IDOT_Offices\District_9\Projects\78728\CADDData\CAD\Sheets\78728-Sheets.dgn

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTION				F.A.I. RTE. 57	SECTION **	COUNTY *	TOTAL SHEETS 16	SHEET NO. 8
		DRAWN -	REVISED -										
	PLOT SCALE = 94.4444 ' / in.	CHECKED -	REVISED -						CONTRACT NO. 78728				
	PLOT DATE = 3/29/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS	FED. AID PROJECT

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson

MODEL: Default
FILE NAME: p:\s\blanroom\dot\illinois\proj\blanroom\Documents\DOT_Offices\District_9\Projects\78728\CADDData\CAD\Sheets\78728-Sheets.dgn

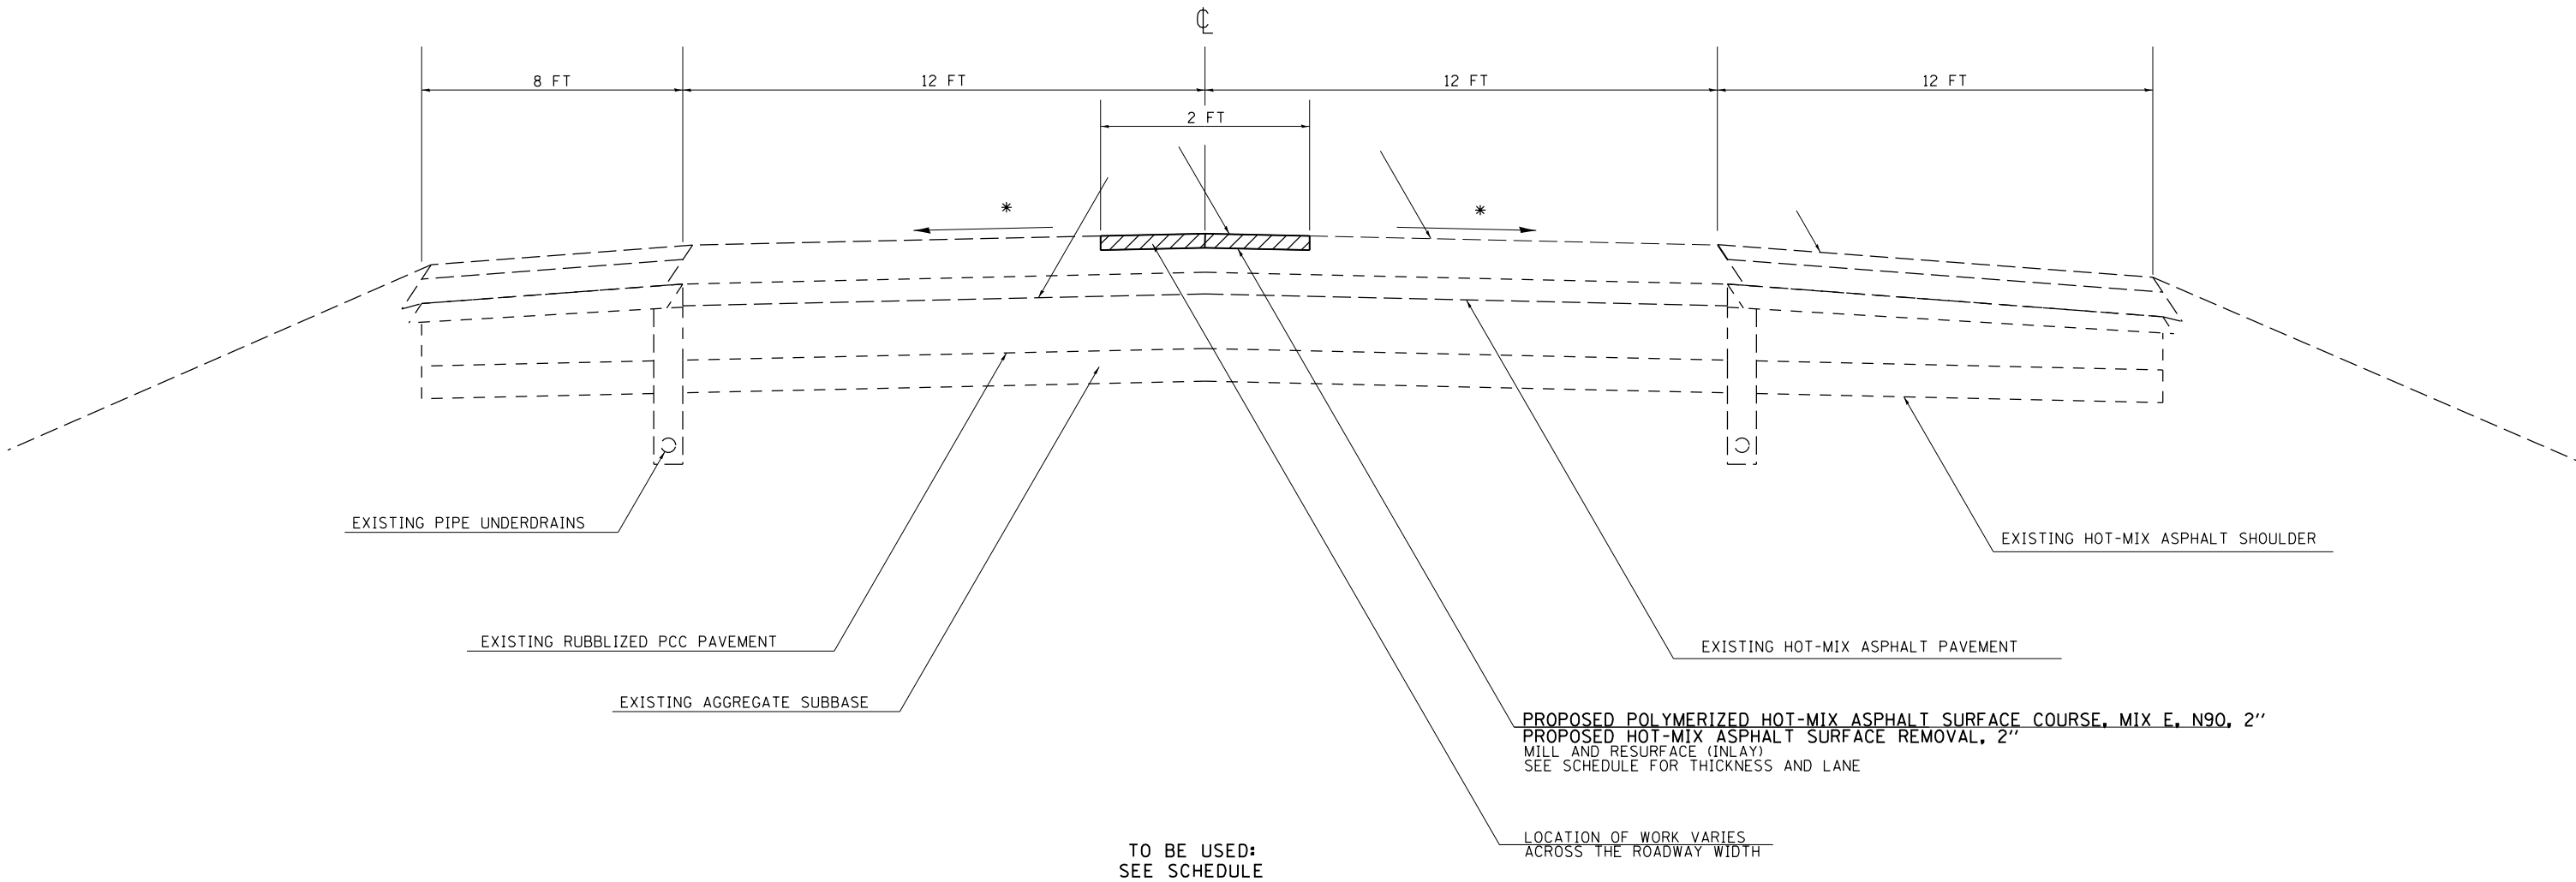

NOTES:

* MATCH EXISTING CROSS SLOPE

FILE NAME: D:\	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTION				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = 94.4444 ' / in.	DRAWN -	REVISED -						57	**	*	16	9
	PLOT DATE = 3/29/2019	CHECKED -	REVISED -						CONTRACT NO. 78728				
		DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS	FED. AID PROJECT

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson

I - 57 NORTHBOUND PAVEMENT MARKING SCHEDULE

LOCATION		WIDTH	LENGTH	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID- LINE 6"	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID- LINE 4"	RAISED REFLECTIVE PVMT MKR	RAISED REFLECTIVE PVMT MKR REMOVAL
MP *							
I-57 NORTH BOUND				FOOT	FOOT	EACH	EACH
MP 63.0 = COUNTRY CLUB RD OVERPASS							
67.70	68.70			1320	5280	66	66
67.70	68.70	12	20	10	20	1	1
69.40	71.40			2640	10560	132	132
69.40	71.40	12	20	50	100	5	5
71.40	72.80			1848		93	93
76.90	78.40			1980	7920	99	99
76.90	78.40	12	10	30	60	3	3
TOTAL (FRANKLIN CO.)				7848	23880	396	396
MP 80.7 = FRANKLIN/JEFFERSON CO LINE							
80.70	83.00			3036	24288	152	152
83.00	83.50			660	2640	33	33
83.50	83.70			264	2112	14	14
83.70	84.90			1584	6336	80	80
84.90	85.40			660	5280	33	33
85.40	87.20			2376	9504	119	119
TOTAL (JEFFERSON CO.)				8580	50160	431	431
TOTAL=				16428	74040	827	827

*ALL MP ARE APPROXIMATE. FINAL LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER.

MODEL: Default
FILE NAME: p:\s\blanroom\dot.illinois\proj\PWIDOT\Documents\DOT Offices\District 9\Projects\78728\CADDData\CADSheets\78728-Sheets.dgn

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT MARKING SCHEDULE				F.A.I. RTE. 57	SECTION **	COUNTY *	TOTAL SHEETS 16	SHEET NO. 10
	PLOT SCALE = 94.4444 ' / in.	CHECKED -	REVISED -						CONTRACT NO. 78728				
	PLOT DATE = 3/29/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS	FED. AID PROJECT

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson

I - 57 SOUTHBOUND PAVEMENT MARKING SCHEDULE

LOCATION		WIDTH	LENGTH	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID- LINE 6"	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID- LINE 4"	RAISED REFLECTIVE PVMT MKR	RAISED REFLECTIVE PVMT MKR REMOVAL
MP		PL					
I - 57 NORTH BOUND				FOOT	FOOT	EACH	EACH
END OF BONNIE RESURFACING MP 87.4							
84.90	84.30			792	3168	40	40
84.90	84.30	12	10	40	80	4	4
84.30	83.90			528	4224	27	27
84.30	83.90	12	10	10	20	1	1
83.10	82.10			1320	5280	66	66
83.10	82.10	12	20	20	40	2	2
81.10	80.70			528	4224	27	27
81.10	80.70	12	10	30	60	3	3
TOTAL (JEFFERSON CO.)				3238	17036	167	167
MP 80.7 = FRANKLIN/ JEFFERSON CO LINE							
80.70	78.20			3300	26400	165	165
80.70	78.20	12	10	30	60	3	3
78.20	76.90			1716	6864	86	86
78.20	76.90	12	10	60	120	6	6
78.20	76.90	12	20	20	40	2	2
76.90	76.70			264		14	14
75.60	71.70			5148	20592	258	258
75.60		12	10	10	20	1	1
72.60		24	20	10	40	1	1
71.70		12	10	10	20	1	1
TOTAL (FRANKLIN CO.)				10568	54156	537	537
TOTAL=				13806	71192	704	704

*ALL MP ARE APPROXIMATE. FINAL LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER.

MODEL: Default
FILE NAME: p:\s\blanroom\dot.illinois\proj\PWIDOT\Documents\DOT Offices\District 9\Projects\78728\CADDData\CADSheets\78728-Sheets.dgn

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT MARKING SCHEDULE			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					57	**	*	16	11
	PLOT SCALE = 94.4444 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 78728				
	PLOT DATE = 3/29/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson

MODEL Default
FILE Name: pavjplannerom.datalinks.sou:PWIDOT\Documents\DOT Office\District 9\Projects\78728\CAOData\CADsheets\78728-Sheets.dgn

PAVEMENT SCHEDULE								
NB LANES								
MP *	MP *	LENGTH(FT)	WIDTH (FT)	HMA SURFACE REMOVAL, 2"	POLY HMA SURFACE, MIX E, 2"	MATERIAL TRANSFER DEVICE	BIT MAT (TACK COAT)	NOTES
				SQ YD	TON	TON	POUND	
63.0								COUNTRY CLUB RD OVERPASS
67.7	68.7	5280	13	7626.7	854.2	854.2	3432.0	PL AND EOP
69.4	71.4	10560	13	15253.3	1708.4	1708.4	6864.0	PL AND EOP
71.4	72.8	7392	2	1642.7	184.0		739.2	CL
76.9								HOLE PL
76.9	78.4	7920	12	10560.0	1182.7		4752.0	DL
TOTAL (FRANKLIN CO.)				35083	3929	2563	15787	
80.7								FRANKLIN/JEFFERSON CO LINE
80.7	83	12144	25	33733.3	3778.1	3778.1	15180.0	BOTH LANES AND DL EOP
83	83.5	2640	13	3813.3	427.1	427.1	1716.0	DL
83.5	83.7	1056	26	3050.7	341.7	341.7	1372.8	BOTH LANES AND BOTH EOP
83.7	84.9	6336	13	9152.0	1025.0	1025.0	4118.4	DL
85	85.4	2112	25	5866.7	657.1	657.1	2640.0	BOTH LANES AND DL EOP
85.4	87.2	9504	13	13728.0	1537.5	1537.5	6177.6	DL
TOTAL (JEFFERSON CO.)				69344	7767	7767	31205	
PROJECT TOTAL				104427	11696	10330	46992	

*ALL MP ARE APPROXIMATE. FINAL LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER.

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT SCHEDULE			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					57	**	*	16	12
	PLOT SCALE = 100,0000 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 78728				
	PLOT DATE = 4/5/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson

MODEL Default
FILE Name: pavjuplanroom.dwg\\links.sou\\PW\\DOT\\Documents\\DOT Office\\D\\l\\r\\t\\ 9\\Projects\\78728\\CAD\\Data\\CAD\\sheets\\78728-Sheets.dgn

PAVEMENT SCHEDULE								
SB LANES								
MP*	MP*	LENGTH(FT)	WIDTH (FT)	HMA SURFACE REMOVAL, 2"	POLY HMA SURFACE, MIX E, 2"	MATERIAL TRANSFER DEVICE	BIT MAT (TACK COAT)	NOTES
				SQ YD	TON	TON	POUND	
87.4								END OF BONNIE RESURFACING MP 87.4
86.9	85.9	5280	13	7626.7	854.2	854.2	3432.0	PL EOS
84.9	84.3	3168					0.0	PL
84.3	83.9	2112	25	5866.7	657.1	657.1	2640.0	BOTH AND PL EOP
83.1	82.1	5280	13	7626.7	854.2	854.2	3432.0	DL AND DL EOP
81.1	80.7	2112	24	5632.0	630.8	630.8	2534.4	BOTH
TOTAL (JEFFERSON CO.)				26753	2997	2997	12039	
80.7								FRANKLIN/JEFFERSON CO LINE
80.7	78.2	13200	24	35200.0	3942.4	3942.4	15840.0	BOTH
78.2	76.9	6864						PATCH ONLY SEE SCHEDULE
76.9	76.7	1056	2	234.7	26.3		105.6	CL
75.6								PATCH ONLY SEE SCHEDULE
75.6	71.7	20592	13	29744.0	3331.3	3331.3	13384.8	DL AND DL EOP
72.6								PATCH ONLY SEE SCHEDULE
72								PATCH ONLY SEE SCHEDULE
71.7								PATCH ONLY SEE SCHEDULE
TOTAL (FRANKLIN CO.)				65179	7301	7274	29331	
PROJECT TOTAL				91932	10298	10271	41370	

*ALL MP ARE APPROXIMATE. FINAL LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER.

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT SCHEDULE			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					57	**	*	16	13
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 78728				
	PLOT DATE = 4/5/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson

MODEL: Default
FILE NAME: p:\s\blanroom\dot.illinois\gov\p\WIDOT\Documents\DOT_Offices\District_9\Projects\78728\CADDData\CADSheets\78728-Sheets.dgn

PATCHING SCHEDULE								
NB LANES								
MP	MP	LENGTH(FT)	WIDTH (FT)	CLASS B PATCHES, TYPE IV	DOWEL BARS 1-1/2"	SAW CUTS	WELDED WIRE REINFORCEMENT	NOTES
				SQ YD	EACH	FOOT	SQ YD	
63.0								COUNTRY CLUB RD OVERPASS
67.7	68.7	20	12					
69.4	71.4	20	12	106.8	88	304	106.8	4 CL B AND 1 CL C
71.4	72.8							
76.9		10	12					3 PATCHES
76.9	78.4							
TOTAL (FRANKLIN CO.)				106.8	88.0	304.0	106.8	
80.7								FRANKLIN/JEFFERSON CO LINE
80.7	83							
83	83.5							
83.5	83.7							
83.7	84.9							
85	85.4							
85.4	87.2							
TOTAL (JEFFERSON CO.)				0.0	0.0	0.0	0.0	
PROJECT TOTAL				107	88	304	107	

*ALL MP ARE APPROXIMATE. FINAL LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER.

Model: Default
File Name: p:\s\blanroom\dot.illinois\proj\WIDOT\Documents\DOT_Offices\District_9\Projects\78728\CADDData\CADSheets\78728-Sheets.dgn

PATCHING SCHEDULE								
SB LANES								
MP *	MP *	LENGTH(FT)	WIDTH (FT)	CLASS B PATCHES, TYPE IV	DOWEL BARS 1-1/2"	SAW CUTS	WELDED WIRE REINFORCEM ENT	NOTES
				SQ YD	EACH	FOOT	SQ YD	
87.4								END OF BONNIE RESURFACING MP 87.4
86.9	85.9							
84.9	84.3	10	12					4 PATCHES
84.3	83.9	10	12					
83.1	82.1	20	12					2 PATCHES
81.1	80.7	10	12					3 PATCHES
TOTAL (JEFFERSON CO.)				0.0	0.0	0.0	0.0	
80.7								FRANKLIN/ JEFFERSON CO LINE
80.7	78.2	10	12					3 PATCHES
78.2	76.9	10/20	12					6 (12 X 10) - 2 (12 X 20)
76.9	76.7							
75.6		10	12					
75.6	71.7							
72.6		20	24					
72								
71.7		10	12					
TOTAL (FRANKLIN CO.)				0.0	0.0	0.0	0.0	
PROJECT TOTAL				0	0	0	0	

*ALL MP ARE APPROXIMATE. FINAL LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER.

	USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PATCHING SCHEDULE			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					57	**	*	16	15
	PLOT SCALE = 94,4444 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 78728				
	PLOT DATE = 3/29/2019	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

**D9 Patch and Bit Resurf 2019-1


Franklin/Jefferson

MODEL: Default
FILE NAME: p:\s\blanroom\dot\illinois\proj\WIDOT\Documents\DOT_Offices\District_9\Projects\78728\CADDData\CADSheets\78728-Sheets.dgn

USER NAME	= colemm	DESIGNED	-	REVISED	-
		DRAWN	-	REVISED	-
PLOT SCALE	= 94.4444 ' / in.	CHECKED	-	REVISED	-
PLOT DATE	= 3/29/2019	DATE	-	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

INLAY DETAIL

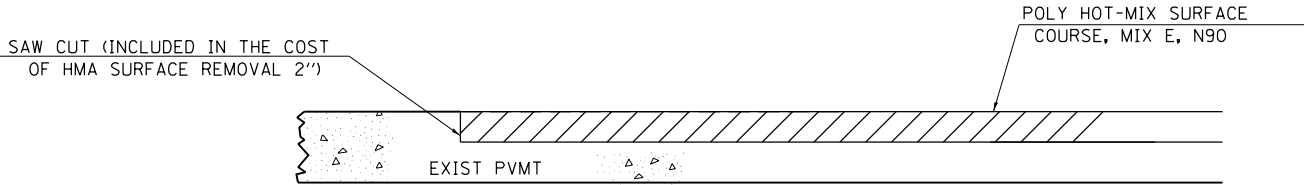

SECTION A-A

THIS DETAIL IS TO BE USED AT THE BEGINGING
AND END OF ALL MILL SECTIONS IN THE CONTRACT.

INLAY DETAIL				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
SCALE: SHEET OF SHEETS STA. TO STA.				57	**	*	16	16
				ILLINOIS		FED. AID PROJECT		

**D9 Patch and Bit Resurf 2019-1

Franklin/Jefferson