



62291

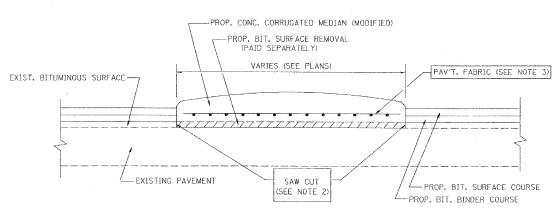

NOTES: 1. CORRUGATED MEDIAN (MODIFIED) SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 606 OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE PORTIONS OF STATE STANDARD 606306.

- 2. WITH THE APPROVAL OF THE ENGINEER, THE CONTRACTOR MAY DELETE THE SAW CUT IF A NEAT JOINT CAN BE OBTAINED BY MILLING THE BIT. SURFACE TO BE REMOVED, SAW CUT WILL BE INCLUDED IN THE COST OF CORRUGATED MEDIAN (MODIFIED)
- 3. PAVEMENT FABRIC WILL BE INCLUDED IN THE COST OF CORRUGATED MEDIAN (MODIFIED)

DETAILS FOR CORRUGATED MEDIAN (MODIFIED)

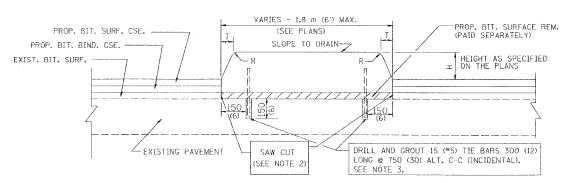

Н	R	Т
150 (6)	25 (1)	25 (1)
225 (9)	25 (1)	50(2)

NOTES: 1. CONCRETE MEDIAN TYPE SB (DOWELLED) SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF STATE STANDARD 606301 AND SECTION 606 OF THE STANDARD SPECIFICATIONS.

- 2. WITH THE APPROVAL OF THE ENGINEER, THE CONTRACTOR
 MAY DELETE THE SAW CUT IF A NEAT JOINT CAN BE
 OBTAINED BY MILLING THE BIT. SURFACE TO BE REMOVED.
 SAW CUT WILL BE INCLUDED IN THE COST OF "CONCRETE MEDIAN TYPE SB (DOWELLED)"
- 3. FOR MEDIAN WIDTH LESS THAN 1.2 m (4') USE
 ONE ROW OF 15 (*5) BARS @ 750 (30) C-C ALONG THE MEDIAN CENTERLINE,
 TIE BARS WILL BE INCLUDED IN THE COST OF "CONCRETE MEDIAN TYPE SB (DOWELLED)"

DETAILS FOR CONCRETE MEDIAN

TYPE SB (DOWELLED)

BASIS OF PAYMENT: "CONCRETE MEDIAN TYPE SB (DOWELLED)"

MÉASUREMENT: m² (sq. ft.)

REVISIONS			
NAME	DATE		
M. DE YONG	05/14/90		
M. DE YONG	06/13/90		
M. DE YONG	06/14/90		
M. DE YONG	06/20/90		
M. DE YONG	09/21/90		
M. DE YONG	10/12/90		
R. SHAH	09/09/94		
R. SHAH	10/25/94		
E.GOMEZ	08/28/00		

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

DETAILS FOR-CONCRETE MEDIAN TYPE SB (DOWELLED) CORRUGATED MEDIAN (MODIFIED)

00 DATE10/18/2002

DRAWN BY: JLS

CHECKED BY

BD600-02 (8D-5)

REVISION DATE: 08/28/00

IO/I8/2002 c:\prafects\diststd\bd05.dgn VI-805