




PULL SLOT

SKID RESISTANT SURFACE

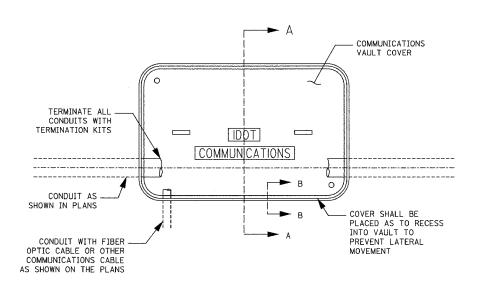

## NOTES:

- 1. BOX SHALL HAVE AN OPEN BASE.
- 2. COVER SHALL WITHSTAND AASHTO H 20 LOADING AND SHALL LOCK.
- 3. ALL OPENINGS IN STRUCTURE MUST BE MACHINED AT TIME OF FABRICATION OR PUNCH DRIVEN AT TIME OF PLACEMENT.
- 4. FIELD PLACEMENT OF COMMUNICATIONS VAULT SHALL BE AS DIRECTED BY THE ENGINEER.

PLAN

REVISIONS		т.,	TNOTS DEE	ADTMEN	T OF TR	ANSPORTATION
NAME	DATE	] ""	THOIS DEF	ALL LIVIEIN	i or in	MINDERNIA
		F.A.I.	90/94	(DAN	RYAN	EXPRESSWAY
						T DETAILS
		l	(H	ANDHOL	F TYPE	CD

SCALE: NTS DI

DRAWN BY: MJL.
CHECKED BY: AAP

Edwards

ONE NORTH FRANKLIN
CHICAGO, IL 60606
PHONE: (312) 251-3000
FAX: (312) 251-3015
WES: WWW.EXCENDED

ISOMETRIC

3/8" - 16 UNC STAINLESS -STEEL HEX HEAD BOLT WITH

COVER -

LIFTING BOLT (TYP.)-

WASHER (2)

ONE NORTH FRANKLIN