685 STA. FED. ROAD BIST. NO. _ ILLINOIS FED. AID PROJECT

1

① Spacing 80 ft. (24 m) max. for first 400 ft. (122 m) or curve spacing shown in Standard 635001, whichever is less (min. 4 reflectors regardless of length).

2 After 400 ft. (122 m), transition to normal delineator spacing shown in Standard 635001, and continue as required.

Bidirectional silver/silver should be used in lieu of monodirectional silver on both sides of two-lane bridges where the bridge pavement is less than 24 (610) wider than the pavement approaching the bridge.

TWO-WAY TRAFFIC

ONE-WAY TRAFFIC


GUARDRAIL / BARRIER WALL / BRIDGE RAIL REFLECTORS

LEGEND

✓ Monodirectional silver

■ Monodirectional amber

Terminal Marker - Black/Yellow Left or Right as appropriate



Begin reflectors at 10' (3m) point but no closer than 50' (15.2m) to terminal -Edge of shoulder

NOTE: Omit terminal marker when terminal over (10') from edge of paved shoulder or break point of unpaved shoulder.


Traffic Barrier Terminal Type 1 (Special) [Terminal over 10' (3m) from edge of shoulder]

Greater than 10' (3m) Begin reflectors at 10' (3m) point -Edge of shoulder


NOTE: Omit terminal marker when terminal over 10' (3m) from edge of paved shoulder or break point of unpaved shoulder, or when terminal buried in backslope.

Traffic Barrier Terminal Type(*) and/or Turned-Down Terminal

[Terminal over 10' (3m) from edge of shoulder] •See Plans for Type

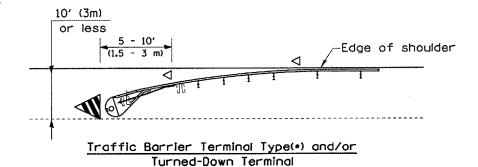

[Terminal over 10' (3m) or less from edge of shoulder] •See Plans for Type



Traffic Barrier Terminal Type 1(Specia) [Terminal 10' (3m) or less from edge of shoulder] All dimensions are in inches (millimeters) unless otherwise noted.

ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT CADD STANDARD

GUARDRAIL AND BARRIER WALL DELINEATION

CADD STD. NO. 635101-D4 SCALE: NOT DRAWN TO SCALE

SHEET 1 OF 3 DRAWN BY CADD CHECKED BY

TERMINAL MARKER PLACEMENT

INCLUDE APPROPRIATE SPECIAL PROVISIONS FOR "GUARD RAIL DELINEATION POLICY: 1. TERMINAL FROM INTERIM SPECIAL PROVISIONS 94-74; "GLARDRAIL AND BARRIER WALL DELINEATION." IF POST MOUNT TERMINAL MARKER IS USED, INCLUDE STATE STD. 720011. DESIGNER NOTE:
1. INCLUDE APPROPR
FROM INTERIM SF
2. IF POST MOUNT 1

-DGN-ONLY=

635101-D4 (1)