




ELECTRICAL SERVICE - PANEL DIAGRAM (TYPICAL FOR POLE AND GROUND MOUNTED SERVICE) SERVICE INSTALLATION POLE MOUNT (SHOWN)

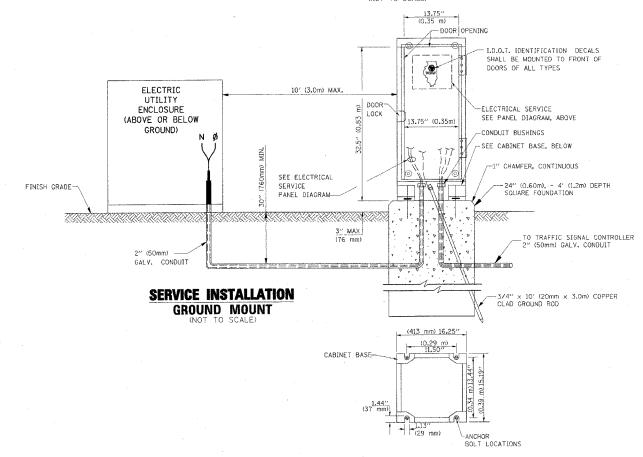


CABINET - BASE BOLT PATTERN

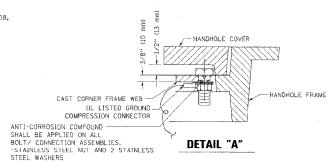




DETAIL "B"

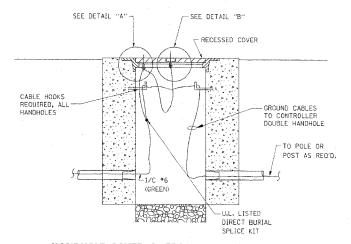

HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCAL

(2) 1/2" x 1 1/4" STAINLESS STEEL BOLT WITH SPLIT LOCK WASHER AND NYLON INSERT LOCKOUT WELDED TO FRAME AND TO COVER. (TYPICAL)

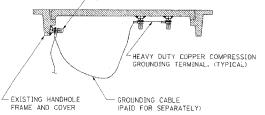

EXISTING HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

NOTES:

GROUNDING SYSTEM


62748

1. THE GROUNDING SYSTEM SHALL CONSIST OF AN INSULATED CONDUCTOR
TYPE XLP, NO. 6 A.W.G., STRANDED COPPER TO BE INSTALLED IN
RACEWAYS. THE GROUNDING CABLE SHALL BE INSTALLED
IN A CONTINUOUS MANNER AS SHOWN ON THE CABLE PLAN PROVIDED.
ALL GROUNDING CONDUCTORS SHALL BE BONDED TO METAL ENCLOSURE
(HANDHOLE, POST, MAST ARM, CONTROLLER, ETC.). GROUND ROD SHALL BE
3/4" DIA. x 10'-0" (20mm x 3.0m) LONG, COPPER CLAD. ONE GROUND ROD
SHALL BE INSTALLED AT ALL POST FOUNDATIONS, POLE FOUNDATIONS.
CONTROLLER CABINET FOUNDATION AND ELECTRICAL SERVICE INSTALLATION
AS INDICATED ON THE CABLE PLAN. IF THERE ARE ANY SPECIAL CONDITIONS
SUCH AS SUB-SURFACE CONDITIONS OR INSTALLATION PROBLEMS, THE RESIDENT
ENGINEER SHALL BE NOTIFIED OR CONTACT THE BUREAU OF TRAFFIC,
ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT ONE AT
(847) 705-4139.

 THE NEUTRAL CONDUCTOR AND THE GROUND CONDUCTOR SHALL BE CONNECTED IN THE SERVICE INSTALLATION. AT NO OTHER POINT IN THE TRAFFIC SIGNAL SYSTEM SHALL THE NEUTRAL AND GROUND CONDUCTORS BE CONNECTED.

 ALL EQUIPMENT GROUNDING CONDUCTORS SHALL TERMINATE AT THE GROUND BUS IN THE CONTROLLER CABINET.

4. THE CONTRACTOR SHALL PROVIDE A GROUND CABLE WITH CONNECTORS BETWEEN THE HANDHOLE COVER AND HANDHOLE FRAME.








3/4" (20mm) HEAVY-DUTY GROUND ROD CLAMP (BURNDY TYPE GRC OR APPROVED EUAL)

NOTES:

• ALL CLAMPS SHALL BE BRONZE OR COPPER, UL APPROVED. • GROUND CABLE SHALL BE LOOPED OVER HOCKS IN THE HANDHOLES 6.5° (2.0m) SLACK SHALL BE PROVIDED IN SINGLE HANDHOLES 13° (4.0m) OF SLACK SHALL BE PROVIDED IN DOUBLE HANDHOLES.

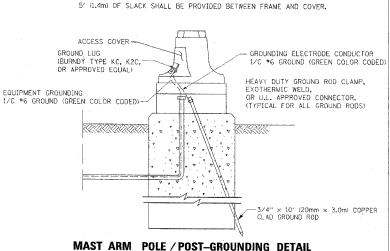

(NOT TO SCALE)			
REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION	
NAME	DATE	ILLINOIS DEPARTMENT OF TRANSPORTATION	
CADD	5/30/00		
CADD	3/15/01	DISTRICT 1	
BUREAU OF TRAFFIC	1/01/02		
		STANDARD TR	AFFIC SIGNAL
		DESIGN DETAILS	
		· ·	DOMEN BY DWD
		SCALE: VERT. NONE HORIZ, NONE	DRAWN BY: RWP DESIGNED BY: DAD CHECKED BY: DAZ
		HONIZ. DATE 10/18/2002	CHECKED BY: DAZ SHEET 3 OF 4
	1	DRILL TOTAL LOVE	SMEEL 3 OF 4

| | 10/18/2002 | c:\projects\distatd\ts05.dgn | VI=TS05

REVISION DATE:01/01/02