



64A27

F. A. DIST.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80		BUREAU	60	21
STA.		TO STA.		
FED. ROAD DIST. NO.		ELIMINIS	FED. AID PROJECT	
SECTION (06-5, 06-6, 06-7, 06 & 50-8M)				

# 15.25m (50') MEDIAN CROSSOVER

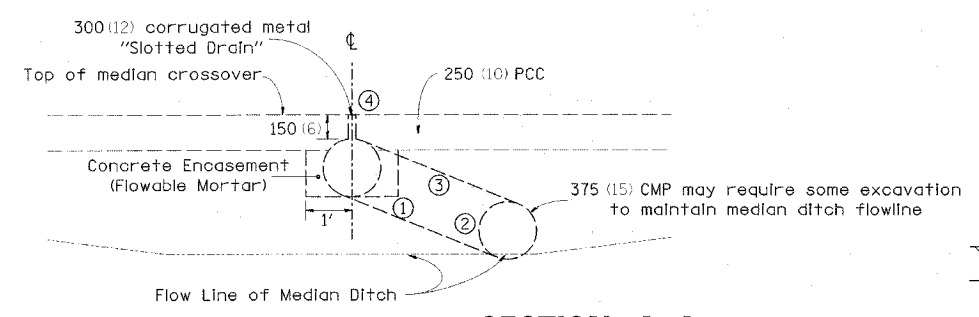

- SECTION A-A**
- ① 300 (12) CMP Elbow
  - ② CMP Tee Section with 300 (12) Riser
  - ③ 300 (12) Coupling Band
  - ④ Duct tape or wood blocks shall be used to cover slotted drain during construction of crossover paving

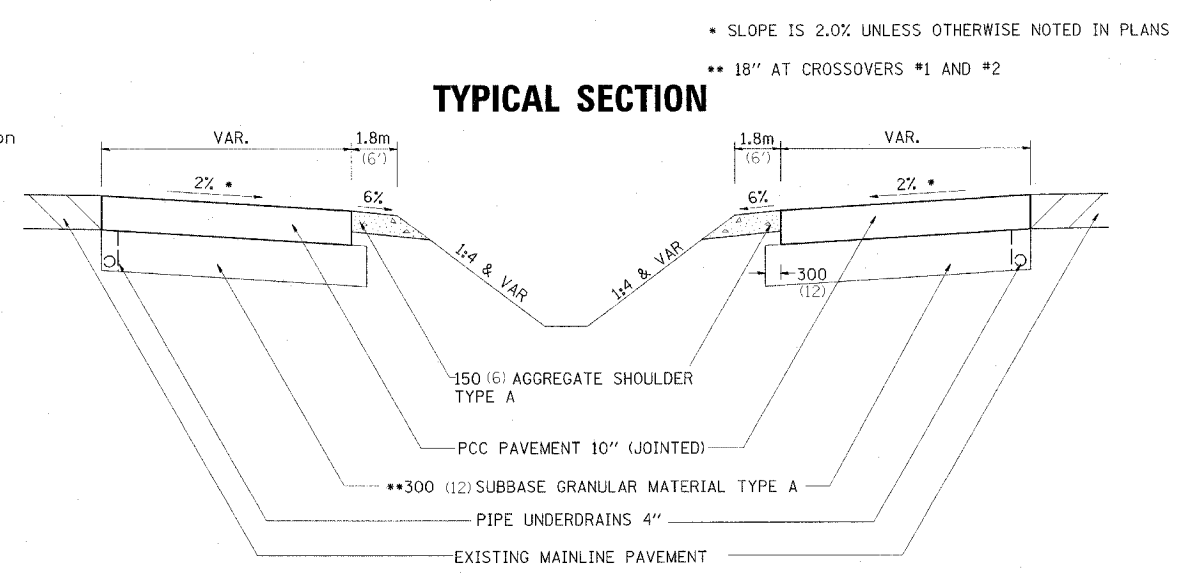

## GENERAL NOTES

The Intent of this plan is to show the construction requirements for a median crossover where the median width is 19.5m (64').

Construction of median crossover shall conform to the requirement of current Standard Specifications.

Slotted drain shall be constructed of 14-gauge corrugated metal roadway pipe modified to accommodate slotted drain as shown.

Price bid for contract items shall be considered full compensation for furnishing all necessary materials and labor to construct the median crossover as detailed hereon.



Incidental Items to Slotted Drain Flowable Mortar

Elbows, Tees and Caps shall be considered incidental to the Corrugated Metal Pipe.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

Distance feet from location station	0'	62.50'	75'	100'	125'	150'	175'	200'	225'	235.75'
Offsets feet from inside edge of pavement	25'	23.00'	21.00'	17.75'	14.75'	12.25'	10.00'	7.75'	6.25'	6.00'
Drop feet from inside edge of pavement	0.50'	0.46'	0.42'	0.36'	0.30'	0.25'	0.20'	0.16'	0.13'	0.24'

## TYPICAL SECTION THRU CENTERLINE OF MEDIAN CROSSOVER

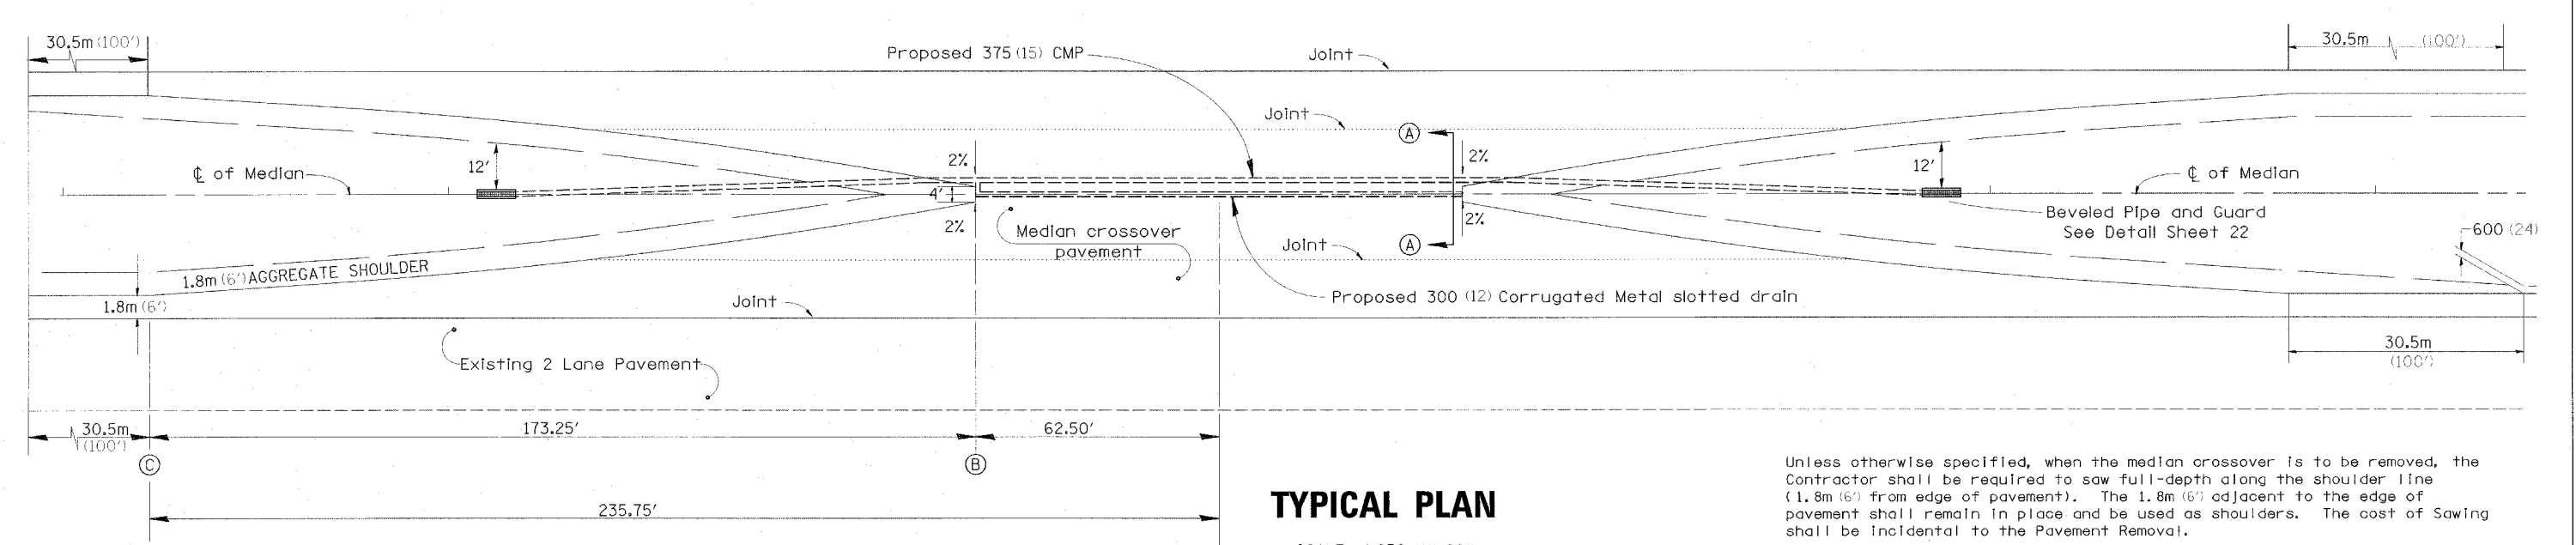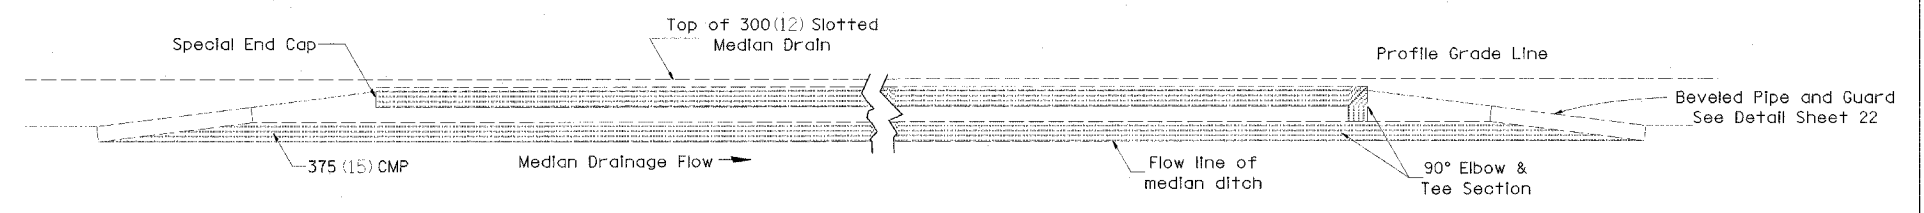

**TYPICAL PLAN**  
SCALE= 1:250 (1"=20')

Unless otherwise specified, when the median crossover is to be removed, the Contractor shall be required to saw full-depth along the shoulder line (1.8m (6') from edge of pavement). The 1.8m (6') adjacent to the edge of pavement shall remain in place and be used as shoulders. The cost of Sawing shall be incidental to the Pavement Removal.

Joints shall be sawed at 1/2 of the width from the EOP to the slotted drain. All joints shall be sealed.

CHECKED BY:

DRAWN BY:

DESIGNED BY:

DATE-TIME  
 4/12/2005 10:49:56 AM  
 4/12/2005 10:49:56 AM  
 4/12/2005 10:49:56 AM  
 4/12/2005 10:49:56 AM