


STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

 			CONT	RACT NO.	76A49
F.A.S. RTE.	SECTION		COUNTY	TOTAL	SHEET NO.
VAR		,	VARIOUS	8	8
STA.		TO STA.			
FED. ROAD DIST. NO.		ILLINOIS	S FED. AID PROJECT		CT

* DIST 8 BRIDGE REHAB 2008-1

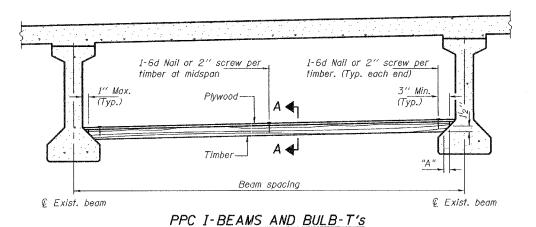

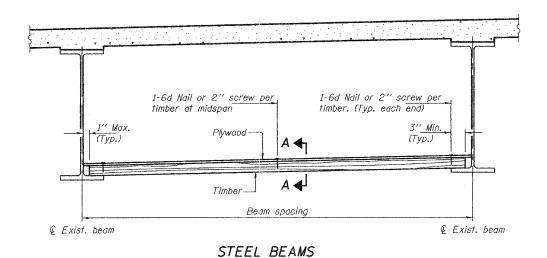

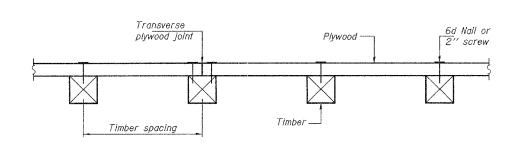

SECTION A-A

TIMBER SPACING

	Timber Sizes (in.)				
Beam Spacing (ft.)		4" x 6" with min. Fb=775 psi Fv=135 psi m Timber Spac	Fv=125 psi		
4.5	16	16	16		
4.75	16	16	16		
5.0	16	16	16		
5.25	16	16	16		
5.5	<i>1</i> 6	16	16		
5,75	16	16	16		
6.0	16	16	16		
6.25	12	16	16		
6.5	12	<i>1</i> 6	16		
6.75	12	<i>1</i> 6	16		
7.0	8	16	16		
7.25	8	<i>1</i> 6	16		
7.5	8	16	16		
7.75	8	<i>1</i> 6	16		
8.0	8	12	16		
8.25	8	12	16		
8.5	6	12	12		
8.75	6	12	12		
9.0	6	8	12		

PPC I-BEAMS AND BULB-T's

BEAM	"A"
36" I-Beam	12"
42″ I-Beam	$I_2^{l_2}$
48′′ I-Beam	$I_2^{\prime\prime}$
54″ I-Beam	158"
63'' Bulb-T	33 ₈ "
72'' Bulb-T	33 ₈ "

See special provision for Permanent Protective Shield System.

Timber sizes shown are nominal sizes. Rough sawn timber of the dimensions

shown will also be considered acceptable.

The minimum Fb and Fv values shown are the tabulated design values given in the National Design Specification for Wood Construction for No. 2 Spruce-Pine-Fir without adjustment factors applied. Better grades or other species with equal or higher allowable stresses will also be considered acceptable.

The timber spacings shown have been determined using allowable stresses with all adjustment factors necessary for the anticipated service conditions. All timber shall be treated. Plywood shall be ${}^58''$ Exterior type plywood.

Plywood shall be placed such that the face grain is perpendicular to the timber supports. When less than a full sheet (4' width) of plywood is used, the width of the strip used shall not be less than 2'.

Transverse plywood joints shall be supported by timbers. When 4" x 6" timbers are used, they shall be placed such that the wide face is horizontal and the narrow face is vertical. Design load = 200 psf.

BILL	0F	MATERIAL

Item	Unit	Total
Protective Shield (Permanent)	Sq. Yd.	1647

ILLINOIS DEPARTMENT OF TRANSPORTATION PERMANENT PROTECTIVE DATE SHIELD DETAILS VARIOUS ROUTES DIST 8 BRIDGE REHAB 2008-1 ST. CLAIR & MADISON COUNTIES SCALE: VERT. DRAWN BY

CHECKED BY

PPS-1

05-03-07