



PHASE DESIGNATION DIAGRAM

TEMPORARY TRAFFIC SIGNAL EMERGENCY VEHICLE PREEMPTION SEQUENCE

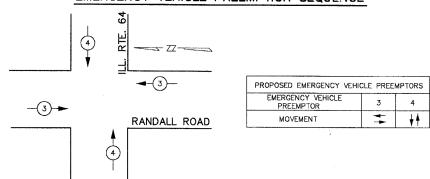

TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL
TYPE	NO. LAMPS	x WATTAGE			
		INCAND.	LED	% OPERATION	
SIGNAL (RED)	12	135	تهز	0.50	810.0
(YELLOW)	12	135	25	0.25	405.0
(GREEN)	12	135	18	0.25	405.0
ARROW	16	135	121	0.10	216.0
PED. SIGNAL		90	25	1.00	0.0
CONTROLLER	1	100		1.00	100.0
ILLUM. SIGN		84		0.05	0.0
VIDEO DETECT	4	23	28	1.00	92.0
LUMINAIRE	4	400		0.50	800.0
-					
FLASHER				0.50	
ENERGY COSTS TO: TOTAL =					2828.0
	CITY OF ST, 2 EAST MAIN ST. CHARLE	STREET	.		
ENERGY SUPPLY	CONTACT: PHONE: COMPANY:	(Torn Lesiewicz (630) 377-4486 St. Charles Electric Department		

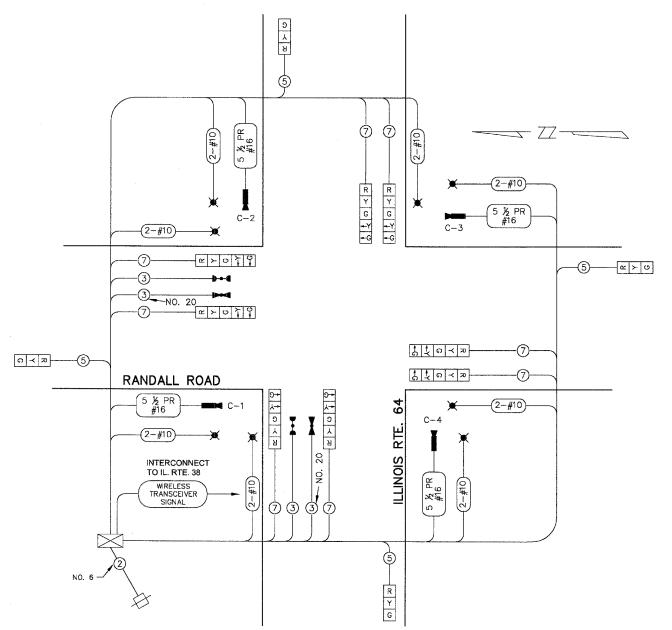

STAGE 1 & 2 TEMPORARY TRAFFIC SIGNAL CABLE PLAN

TEMPORARY CABLE PLAN LEGEND

ROUTE 99-00243-00-PV

336 CONTRACT NO. 83782

TEMPORARY CABLE PLAN

COUNTY

F.H.W.A. REG.5 ILLINOIS PROJECT F-0336(00

SHTS. N

KANE 268 12

TEMPORARY TRAFFIC SIGNAL SECTION 12" TEMPORARY CONTROLLER \Box TEMPORARY SERVICE INSTALLATION INDICATES NUMBER OF CONDUCTORS IN CABLE. ALL CONDUCTORS TO BE NUMBER 14 AWG WIRE UNLESS OTHERWISE NOTED. (5) EMERGENCY VEHICLE LIGHT DETECTOR CONFIRMATION BEACON VEHICLE DETECTOR, INDUCTION LOOP PEDESTRIAN PUSHBUTTON DETECTOR 12" PEDESTRIAN SIGNAL SECTION MACHINE VISION PROCESSOR (MVP) TEMPORARY LUMINAIRE, S.V. 400 W

NOTES FOR TEMPORARY TRAFFIC SIGNAL

- ALL CONTROL EQUIPMENT INCLUDING EMERGENCY PRE-EMPTION AND COMMUNICATION DEVICES FOR THE TEMPORARY TRAFFIC SIGNALS(S) SHALL BE FURNISHED BY THE CONTRACTOR.
- ONLY CONTROLLERS SUPPLIED BY ONE OF THE DISTRICT APPROVED CLOSED LOOP EQUIPMENT MANUFACTURERS WILL BE APPROVED FOR USE AT TEMPORARY SIGNAL LOCATIONS. ALL CONTROLLERS USED FOR TEMPORARY TRAFFIC SIGNALS SHALL BE FULLY ACTUATED NEMA MICROPROCESSOR BASED WITH RS232 DATA ENTRY PORTS COMPATIBLE WITH EXISTING MONITORING SOFTWARE APPROVED BY IDOT DISTRICT 1, INSTALLED IN A NEWA TS1 OR TS2 CABINET. ONLY ONE BRAND OF CONTROLLER WILL BE ACCIPED FOR ANY ONE CONTRACT.
- ALL TRAFFIC SIGNAL SECTIONS AND PEDESTRIAN SIGNAL SECTIONS SHALL BE 12" (300mm). HEADS SHALL BE PLACED AS INDICATED ON THE TEMPORARY TRAFFIC SIGNAL PLAN OR AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL FURNISH ENOUGH CABLE SLACK TO RELOCATE HEADS TO ANY POSITION ON THE SPAN WIRE OR AT LOCATIONS ILLUSTRATED ON THE PLANS FOR CONTRUCTION STAGING. THE TEMPORARY TRAFFIC SIGNAL SHALL REMAIN IN OPERATION DURING ALL SIGNAL HEAD RELOCATIONS. EACH TEMPORARY TRAFFIC SIGNAL HEAD SHALL HEAD RELOCATIONS. EACH TEMPORARY TRAFFIC SIGNAL HEAD SHALL HAVE ITS OWN CABLE FROM THE CONTROLLER CABINET TO THE SIGNAL HEAD.
- ALL EXISTING STREET NAME AND INTERSECTION REGULATORY SIGNS SHALL BE REMOVED FROM EXISTING POLES, RELOCATED AND SECURELY FASTENED TO THE SIGNAL SPAN WIRE OR WOOD POLE AS DIRECTED BY THE ENGINEER.
- ANY TEMPORARY SIGNAL WITHIN AN EXISTING CLOSED LOOP TRAFFIC SIGNAL SYSTEM SHALL BE INTERCONNECTED TO THAT SYSTEM USING SIMILAR BRAND CONTROL EQUIPMENT.
- THE TEMPORARY TRAFFIC SIGNAL SHALL HAVE THE SIGNAL HEAD DISPLAYS, SIGNAL HEAD PLACEMENTS AND CONTROLLER PHASING MATCH THE EXISTING TRAFFIC SIGNAL, AT THE TIME OF THE TURN ON. IF NO TRAFFIC STAGING IS IN PLACE OR WILL NOT BE STAGED ON THE DAY OF THE TURN ON.
- ALL TEMPORARY SIGNAL HEADS SHALL USE INCANDESCENT BULBS.

THE TRAFFIC SIGNAL CONTROL EQUIPMENT FOR THIS PROJECT SHALL BE "EAGLE" TO

MATCH THE EXISTING SYSTEM.

DIVISION OF TRANSPORTATION STAGE 1 & 2 TEMPORARY TRAFFIC SIGNAL CABLE PLAN PHASE DESIGNATION DIAGRAM RANDALL RD. & ILLINOIS RTE. 64 NAME DATE

DRAWN BY: JMH SCALE: NONE
DATE: SEPTEMBER 23, 2004 DESIGNED BY: DMF REVISIONS CHECKED BY: JRL

TS-12