

DATE-TIME *DGN-SPEC* VI-RO32

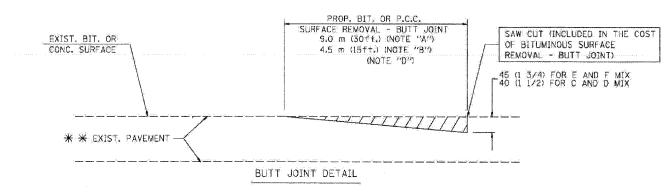

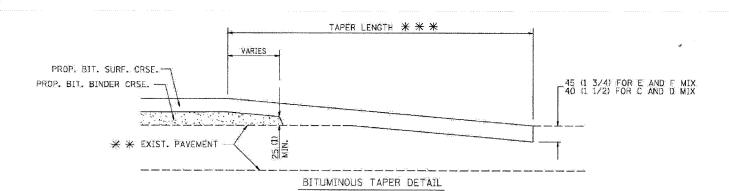

TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR RESURFACING ONLY

* * PC CONCRETE, BITUMINOUS OR BITUMINOUS RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.

THE BUTT JOINT WILL BE PAID FOR PER SQUARE METER (SQUARE YARD.)
AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT" OR
AS "PORTLAND CEMENT CONCRETE SURFACE REMOVAL BUTT
JOINT".

BASIS OF PAYMENT:

- C; THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING BITUMINOUS SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED BITUMINOUS COURSES.
- Ex TAPER THE TEMP, RAMP AT A RATE OF 900 (3 ft.) PER INCH OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 1.35 m (4.5') TEMP, BIT. RAMP WILL BE PAID AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT".
- G: SEE ARTICLE 406.18 AND 406.24 OF THE STANDARD SPECIFICATIONS FOR "BITUMINOUS AND PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

米米米6.1 m (201) PER 25 (1) RESURFACING (NOTE "A") 3.0 m (10") PER 25 (1) RESURFACING (NOTE "B")

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS. OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND BITUMINOUS TAPER DETAILS

SCALE: NONE

R. SHAH

R. SHAH


09/09/94 10/25/94 03/21/97

PROP. PAY LIMIT OF BIT. SURF. REMOVAL FULL THICKNESS OF MILLING TEMP. RAMP (NOTE "C") (NOTE "E") PROP. BIT. SURFACE REMOVAL. EXIST, PAVEMENT EXIST. BIT. SURFACE

MILLED TEMPORARY RAMP

(FOR BUTT JOINT AND BIT. TAPER SEE DETAIL BELOW)


OPTION 1

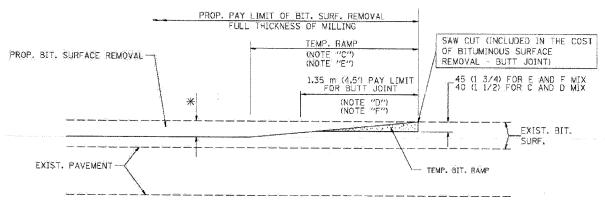

BITUMINOUS CONSTRUCTED TEMPORARY RAMP (FOR BUTT JOINT AND BIT. TAPER SEE DETAIL BELOW)

OPTION 2

TYPICAL TEMPORARY RAMP

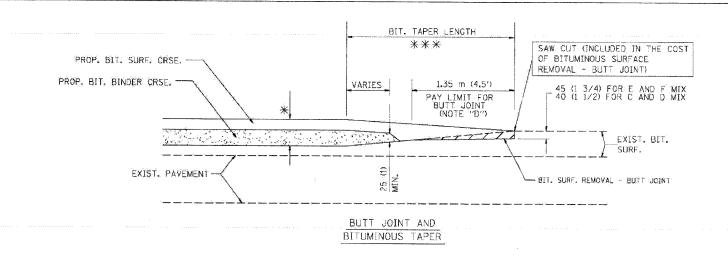

TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR MILLING AND RESURFACING