"NOT TO SCALE" TAXIWAY "A" STA. 15+00 TO STA. 19+25 TAXIWAY "C" STA. 131+75 TO STA. 139+35 LEGEND FOR TYPICAL SECTION

1) PROPOSED AR401: BITUMINOUS SURFACE COURSE - 4" (2 LIFTS)

(2) PROPOSED AR603: BITUMINOUS TACK COAT (RATE PER SPECIFICATION)

(3) PROPOSED AR603: BITUMINOUS TACK COAT (RATE PER SPECIFICATION)

4 EXISTING AR401: BITUMINOUS SURFACE COURSE - 2"

(5) EXISTING AR201: BITUMINOUS BASE COURSE - 3"-12" VARIABLE DEPTH


6 EXISTING AR201: BITUMINOUS BASE COURSE - 1"-10" VARIABLE DEPTH

7 EXISTING AR501: PCC PAVEMENT - 9"

8 EXISTING AR154: GRANULAR BLANKET COURSE -- 7"

(9) EXISTING GROUND

BITUMINOUS MILLING - VARIABLE 3" TO 5"

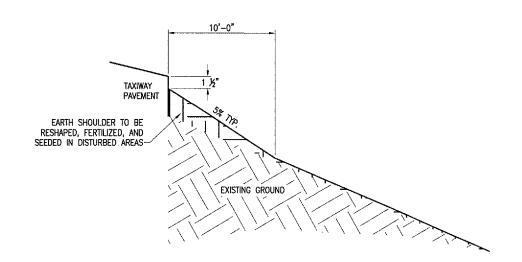

DETAIL 1

EARTH SHOULDER

NOTE:

THE CONTRACTOR WILL REGRADE, SEED AND FERTILIZE THE DISTURBED EARTH SHOULDER. THE GRADING SHALL SHAPE THE EARTH SHOULDER TO CONFORM TO THE EARTH SHOULDER DETAIL. FERTILIZING AND SEEDING SHALL BE ACCOMPLISHED IN ACCORDANCE TO SPECIFICATION ITEM

NO ADDDITIONAL PAYMENT FOR THE GRADING AND SEEDING ITEM WILL BE MADE TO THE CONTRACTOR. PAYMENT FOR THE WORK SHALL BE INCLUDED IN THE BID AMOUNT PER TON FOR THE BITUMINOUS SURFACE COURSE.

ANY TURF AREAS DISTURBED BY THE CONTRACTOR WILL BE RESHAPED, FERTILIZED AND SEEDED ACCORDING TO THE ABOVE PARAGRAPH.

DE067

DECATUR, ILLINOIS

HANSON

RECONSTRUCT A PORTION OF RUNWAY 6/24, TAXIWAY A AND C

16

16 of 25 sheets