


ENTRANCE DETAIL

SCALE: 1" = 5'

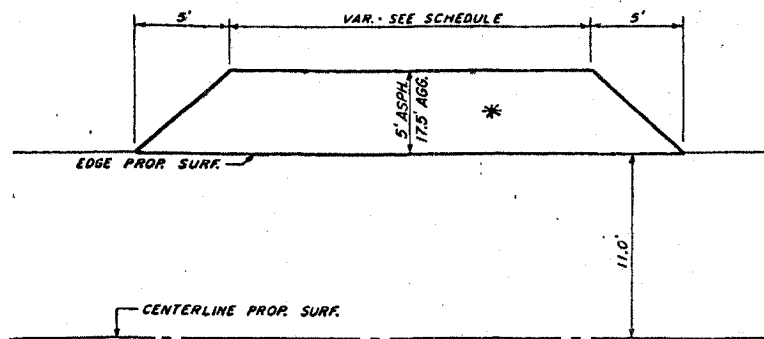


SCHEDULE OF ENTRANCES

STATION	WIDTH	THICKNESS	SQ YDS AGG	TONS AGG SURF CSE	SQ YDS ASPHALT	TONS ASPHALT
90+50	36'	4"	72.8	18.8	22.8	5.10
97+80	18'	8"	37.8	17.2	12.8	2.87
98+00	18'	8"	37.8	17.2	12.8	2.87
100+00	18'	8"	37.8	17.2	12.8	2.87
100+00 TO 100+50						
RT			158.8	81.8	41.7	9.84
LT			37.8	17.2	12.8	2.87
103+80	18'	8"	37.8	17.2	12.8	2.87
106+80	18'	4"	37.8	8.6	12.8	2.87
108+36	18'	4"	37.8	8.6	12.8	2.87
111+80	36'	4"	72.8	18.8	22.8	5.10
116+30	18'	4"	37.8	8.6	12.8	2.87
5+00	18'	4"	37.8	8.6	12.8	2.87
S.R. LT			37.8	8.6	12.8	2.87
S.R. RT			37.8	8.6	12.8	2.87
			662.5	193.8	215.3	48.24


*CONSISTS OF 4" BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE MIX "C" N50

TWP.	COUNTY	SECTION	TWR HWY. NO.	SHEET NO.	TOTAL SHEETS
TOULON	STARK	03-06114-00-SP	46	3	6

PROPOSED TYPICAL SECTION
STA. 96+50 TO 105+50
SIDE ROAD 0+12 TO 4+50

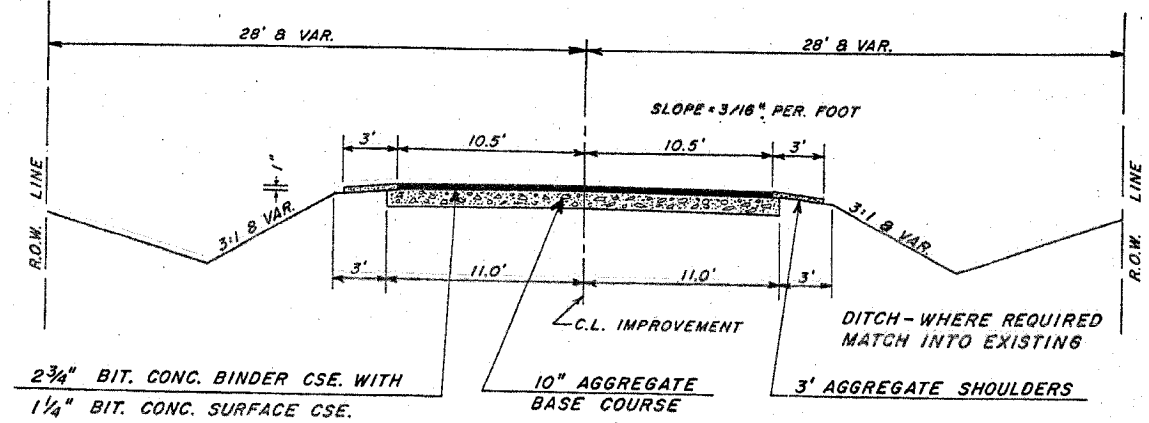


PROPOSED CENTERLINE OF IMPROVEMENT

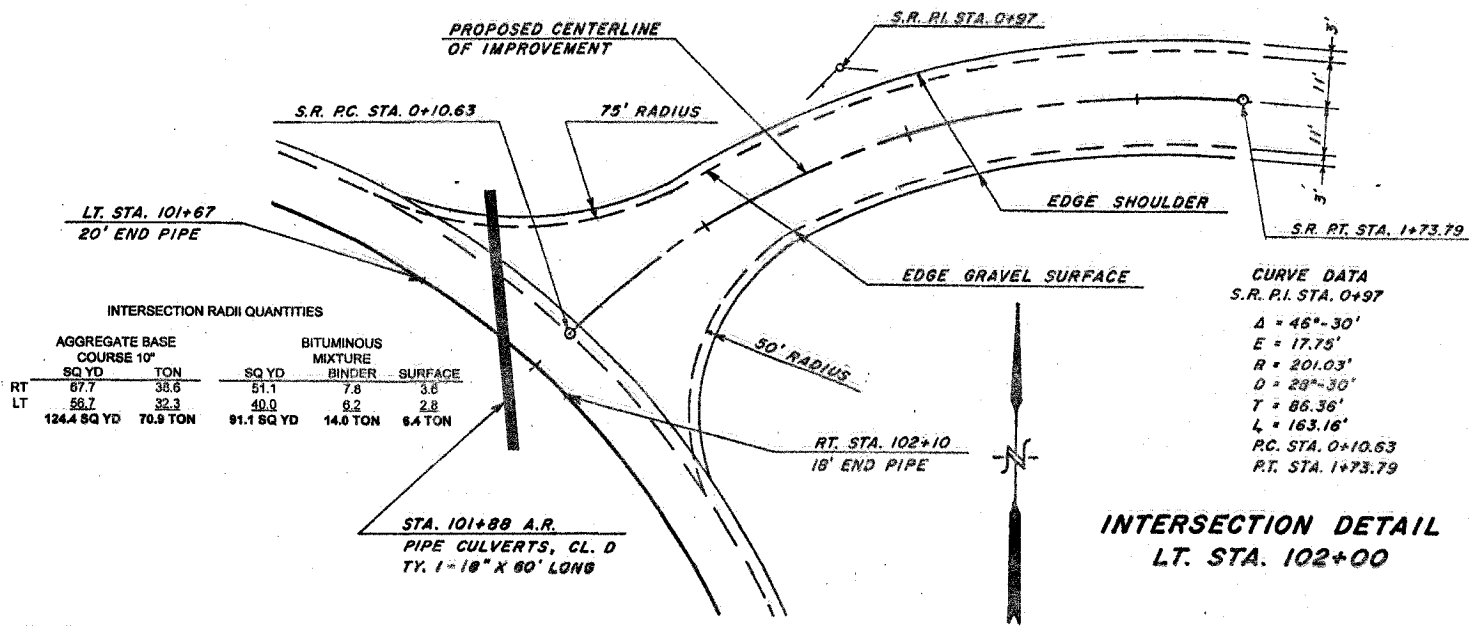


PROPOSED TYPICAL SECTION PAVING EXISTING PAVEMENT

STA. 88+00 TO 96+50 (19' WIDE) *
STA. 105+50 TO 116+82 (20' WIDE) *
STA. 4+50 TO 9+50 (18' WIDE) *

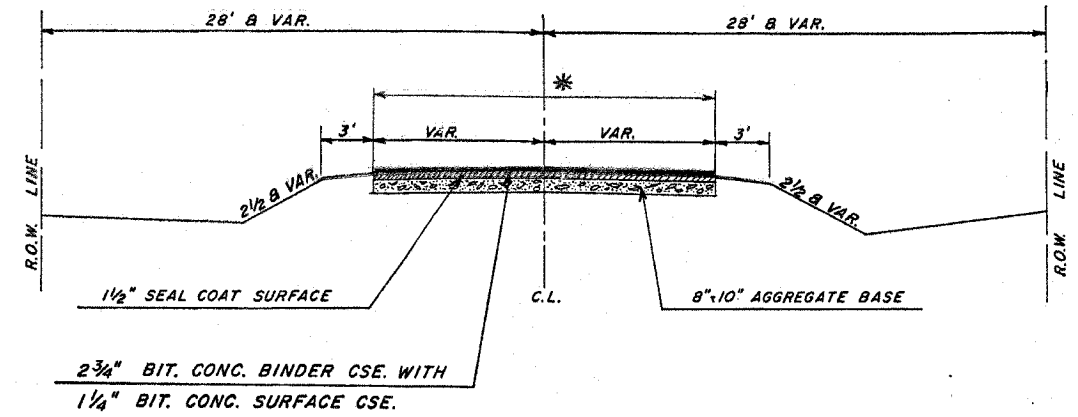


LOCATION MAP SHOWING REQUIRED BARRICADE AND SIGN PLACEMENT

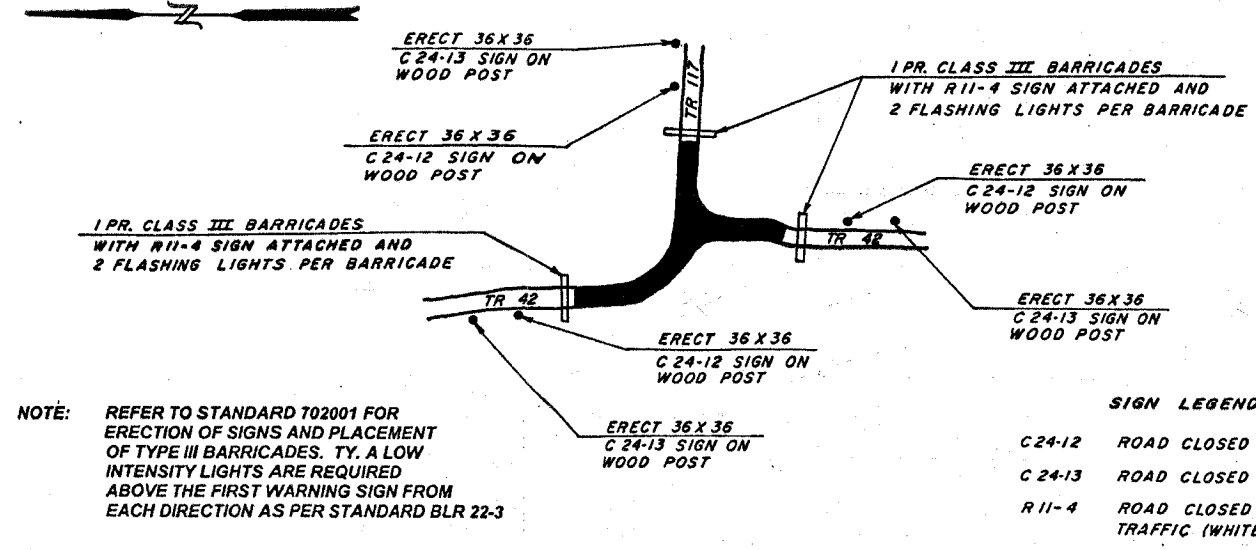

NOTE: REFER TO STANDARD 702001 FOR ERECTION OF SIGNS AND PLACEMENT OF TYPE III BARRICADES. TY. A LOW INTENSITY LIGHTS ARE REQUIRED ABOVE THE FIRST WARNING SIGN FROM EACH DIRECTION AS PER STANDARD BLR 22-3

MAILBOX TURNOUT DETAIL

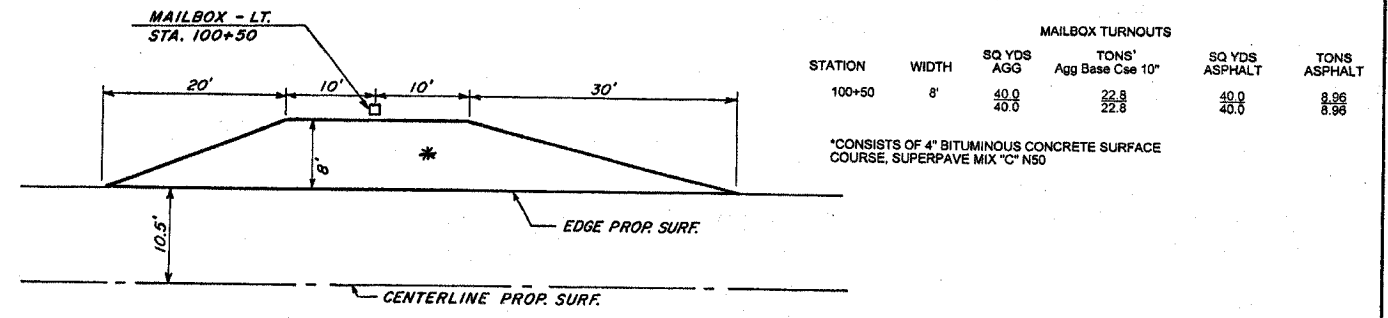

*CONSISTS OF 4" BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE MIX "C" N50