



<b>ROUTE</b>	<b>SECTION</b>	<b>COUNTY</b>	<b>TOTAL SHEETS</b>	<b>SHEET NUMBER</b>
VARIOUS	2010-059-1	VARIOUS	44	18

Contract 60P77


T 38N

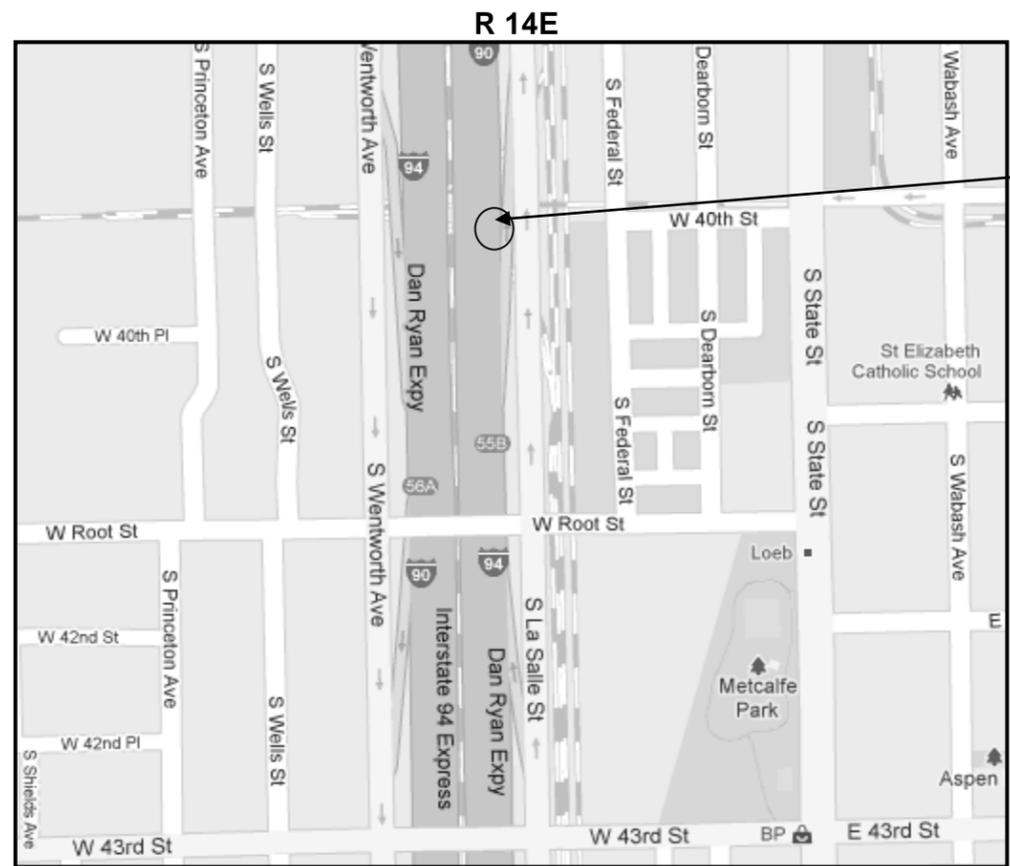

**LOCATION 8: I-90/94 (DAN RYAN EXPY) WB LOCALS, 0.4 MILES NORTH OF 43rd ST, RIGHT SIDE**

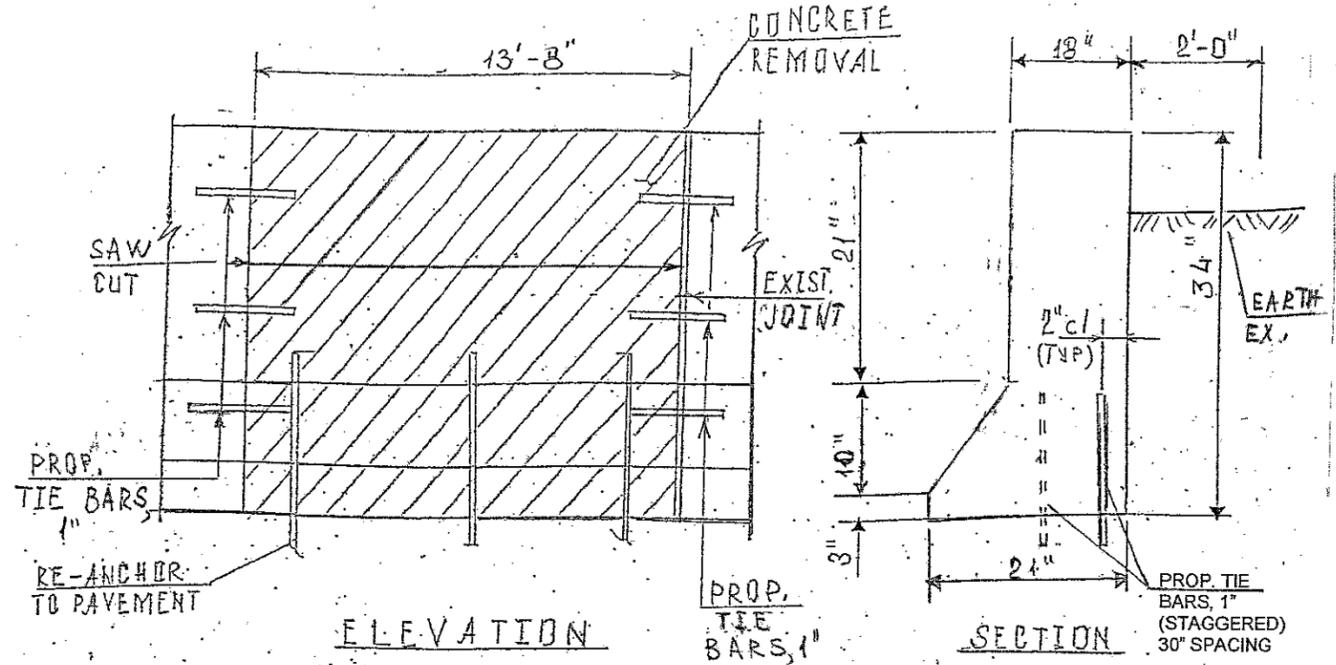

**CITY OF CHICAGO  
LAKE TOWNSHIP  
COOK COUNTY**

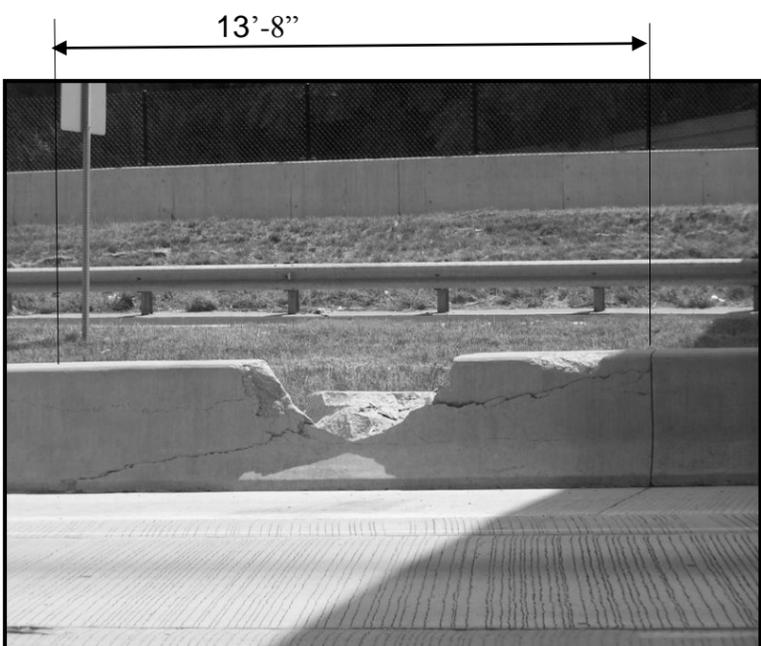

FULL DEPTH REPAIR  
REPLACE 13'-8" OF BARRIER WALL  
FOR MORE DETAILS SEE SHEET #8

**BILL OF MATERIALS**

ITEM	UNIT	QUANTITY
CONCRETE REMOVAL	CU YD	2.3
CONCRETE STRUCTURE	CU YD	2.3
TIE BARS	EACH	12
SAW CUTS	FOOT	6.0
EARTH EXCAVATION	CU YD	2.0
TEMPORARY EROSION CONTROL BLANKET	SQ YD	3.0
TOPSOIL FURNISH AND PLACE, 4"	SQ YD	3.0
SEEDING CLASS 2A	ACRE	0.0006
PROTECTIVE COAT	SQ YD	6.7

**TRAFFIC DATA:**

I-90/94: SPEED LIMIT = 55 MPH  
2009 ADT = 261900

ILLINOIS DEPARTMENT OF TRANSPORTATION  
  
LOCATION: 8  
I-90/94 (DAN RYAN EXPY)  
LOCALS