


ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2011-059-I	VARIOUS	44	31

Contract 60P77


R 12E

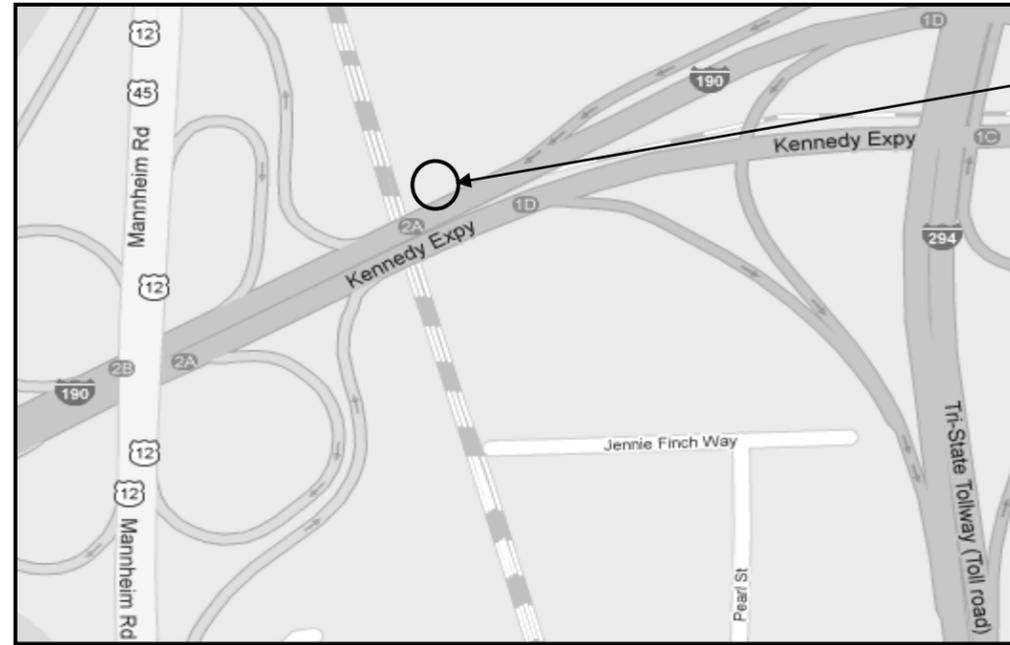

LOCATION 18: I-190 WB
 BEFORE EXIT 2A FOR MANNHEIM RD, NORTH OF THE OVERHEAD SIGN TRUSS "C5". ADJACENT TO MILE MARKER 1/62, RIGHT SIDE

T 40N

CITY OF CHICAGO
 JEFFERSON TOWNSHIP
 COOK COUNTY

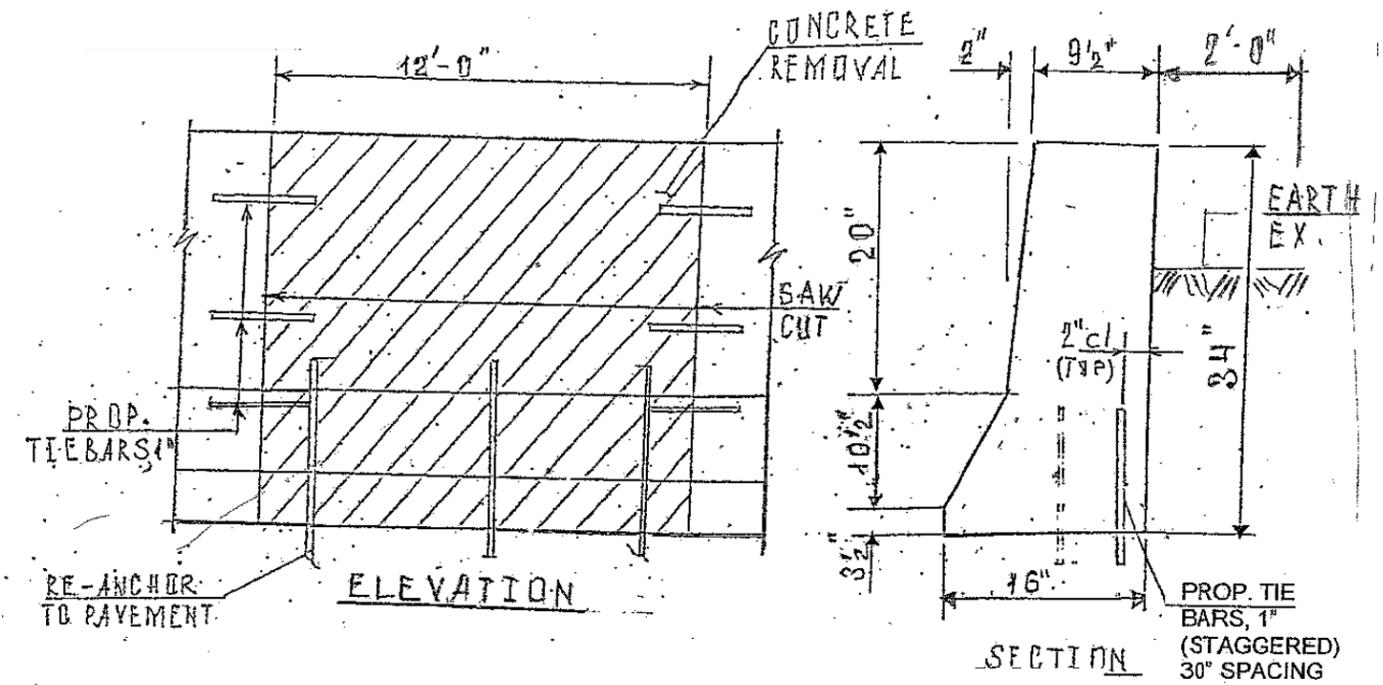

12'



FULL DEPTH REPAIR
 REPLACE 12 FT OF BARRIER WALL
 FOR MORE DETAILS SEE SHEET # 8



TRAFFIC DATA:

I-190: SPEED LIMIT = 55 MPH
 2009 ADT = 106700

BILL OF MATERIALS

ITEM	UNIT	QUANTITY
CONCRETE REMOVAL	CU YD	1.2
CONCRETE STRUCTURE	CU YD	1.2
TIE BARS	EACH	11
SAW CUTS	FOOT	6.0
EARTH EXCAVATION	CU YD	1.8
TEMPORARY EROSION CONTROL BLANKET	SQ YD	3.0
TOPSOIL FURNISH AND PLACE, 4"	SQ YD	3.0
SEEDING CLASS 2A	ACRE	0.0006
PROTECTIVE COAT	SQ YD	5.0

ILLINOIS DEPARTMENT OF TRANSPORTATION

LOCATION: 18
 I-190 WB AT MANNHEIM RD