

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2010-059-1	VARIOUS	44	37


Contract 60P77

R 13E


T 40N



LOCATION 24: HENDERSON & DRAKE
EAST FRONTAGE RD, SOUTH OF ADDISON
AND NORTH OF KIMBALL

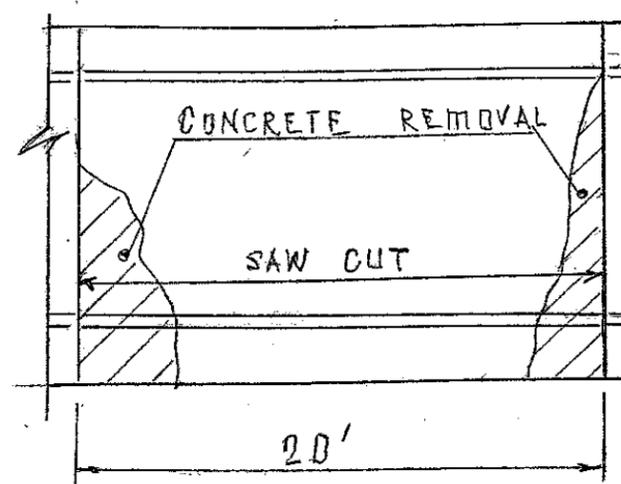


ELEVATION

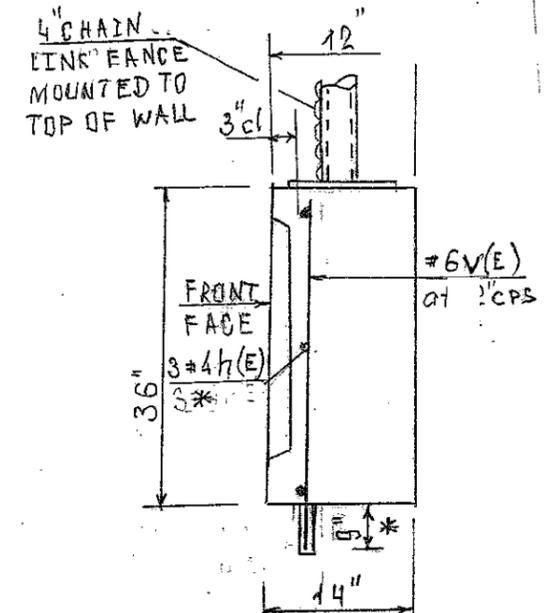

SECTION

CITY OF CHICAGO
JEFFERSON TOWNSHIP
COOK COUNTY

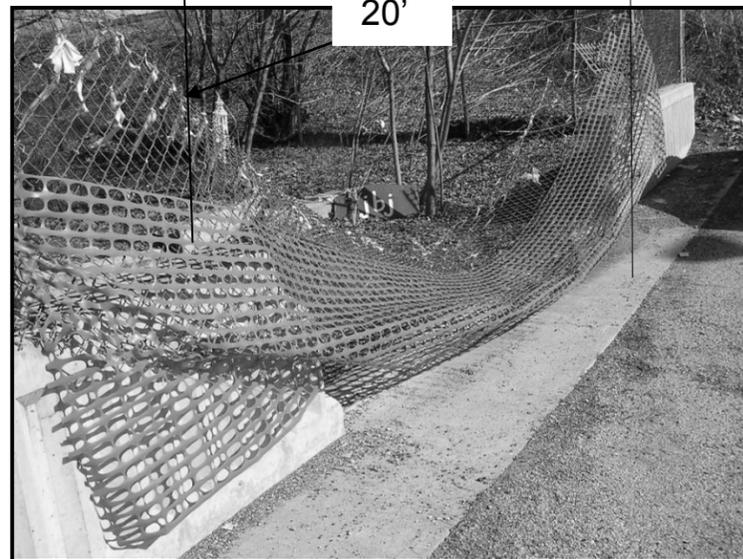

REPLACE 20 FT OF RETAINING WALL
FOR MORE DETAILS SEE SHEET # 2 OF 2

BILL OF MATERIALS

ITEM	UNIT	QUANTITY
CONCRETE REMOVAL	CU YD	0.5
CONCRETE STRUCTURE	CU YD	2.4
MECHANICAL SPLICERS	EACH	6
CHAIN LINK FENCE, 4'	FOOT	24
PROTECTIVE COAT	SQ YD	9.5
SAW CUTS	FOOT	6
REINFORCEMENT BARS (EPOXY COATED)	LBS	150
TOP SOIL FURNISH AND PLACE, 4"	SQ YD	7.0
SEEDING CLASS 2A	ACRE	0.0014

REINFORCEMENT BARS

BAR NO	SIZE	LENGTH	SHAPE
v(E) 20	#6	3'-6"	—
h(E) 3	#4	19'-10"	—

EPOXY GROUT #6v(E) AND #4h(E) BARS ACCORDING TO ART. 584 OF THE STANDARD SPECIFICATIONS. COST INCLUDED WITH REINFORCEMENT BARS EPOXY COATED.

THE CONTRACTOR SHALL MATCH EXISTING WALL PATTERN.

TRAFFIC DATA:

HENDERSON ST: SPEED LIMIT = N/A
2009 ADT = N/A

SHEET 1 OF 2

ILLINOIS DEPARTMENT OF TRANSPORTATION

LOCATION: 24
HENDERSON AND DRAKE