


LEGEND


DUAL ENTRY PHASE PEDESTRIAN PHASE SINGLE ENTRY PHASE

NUMBER REFERS TO ASSOCIATED PHASE

PHASE DESIGNATION DIAGRAM

CONTROLLER SEQUENCE





EMERGENCY VEHICLE PREEMPTION SEQUENCE

EMERGENCY VE	HICLE PRI	EEMPTORS
EMERGENCY VEHICLE PREEMPTOR	3	4
MOVEMENT	†	†

	TRAFFIC S	IGNAL I	NSTALLA	TION	
	ELECTRICAL	SERVI CE	REQUIR	EMENTS	
TYPE	NO. LAMPS	WATTAGE		% OPERATIONS	TOTAL
		INCAND.	LED		WATTAGE
SIGNAL (RED)	10	1 35	1 7	0.50	85
(YELLOW)	10	1 35	25	0.25	63
(GREEN)	10	1 35	15	0.25	38
ARROW	4	1 35	12	0.10	5
PED. SIGNAL	2	90	25	1.00	50
CONTROLLER	1	1 00	100	1.00	100
ILLUM. SIGN		252	25	0.05	
VIDEO SYSTEM		150	-	1.00	

I. D. O. T.

ENERGY COSTS-

FLASHER LED

BILLED TO: CITY OF HIGHLAND PARK 1707 ST. JOHNS AVENUE

ENERGY SUPPLY -

CONTACT <u>TERRI BLECK</u> PHONE

847-816-5239 COMMONWEALTH EDISON

HIGHLAND PARK, IL 60035

TOTAL =

QUANTITY	UNIT	<u>ITEM</u>
1	EACH	MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION
2	EACH	PEDESTRIAN SIGNAL HEAD, LED, 1-FACE, BRACKET MOUNTED WITH COUNTDOWN TIMER
4	EACH	TRAFFIC SIGNAL BACKPLATE, LOUVERED, ALUMINUM
2	EACH	PEDESTRIAN PUSH-BUTTON
1	EACH	MODIFY EXISTING CONTROLLER CABINET
1	EACH	REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT
1	EACH	UNINTERRUPTABLE POWER SUPPLY, SPECIAL
3	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, BRACKET MOUNTED, RETROFIT
3	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED, RETROFIT
1	EACH	SIGNAL HEAD, LED, 1-FACE, 5-SECTION, MAST ARM MOUNTED, RETROFIT
1	EACH	SIGNAL HEAD, LED, 2-FACE, 3-SECTION, BRACKET MOUNTED, RETROFIT
1	EACH	SIGNAL HEAD, LED, 1-FACE, 5-SECTION, BRACKET MOUNTED, RETROFIT

CONTRACTOR SHALL REPLACE BROKEN MOUNTING BRACKETS AT ALL RETROFIT SIGNAL HEADS OR AS DIRECTED BY THE ENGINEER. THE COST OF THIS WORK SHALL BE INCLUDED IN THE CORRESPONDING SIGNAL HEAD, LED, RETROFIT PAY ITEM OF THE TYPE AND NUMBER OF SIGNAL HEADS, FACES, AND SECTIONS AS SPECIFIED IN THE PLANS.


REMOVAL OF EXISTING TRAFFIC SIGNAL EQUIPMENT

THE FOLLOWING ITEMS SHALL BE REMOVED BY THE CONTRACTOR AND SHALL BE DISPOSED OF BY THEM OUTSIDE THE RIGHT-OF-WAY AT THEIR EXPENSE. THE SALVAGE VALUE OF THE REMOVED EQUIPMENT SHALL BE REFLECTED IN THE CONTRACT BID PRICE.

EACH PEDESTRIAN SIGNAL HEAD EACH PEDESTRIAN PUSH-BUTTON

TRAFFIC SIGNAL BACKPLATE TS# 11877

								HIGHLA	ND P	ARK
UTE	41 RAMPS	AT SK	OKIE VA	LLEY ROAD	- CABLE PLAN	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	
OF (MANTITIES	рнасе	DESIG	N DIAGRAM	& EVP SEQUENCE		2012-003 I	LAKE	102	26
01 (ZOANTITIES,	IIIAGE	. DESIG	4. DIAGITATI	Q LVI SEGOLIVOL			CONTRAC	NO. 6	OT41
	CHEET NO	ΛE	CHEETC	CTA	TO STA		11 - 11 O C FED 41	IO DDO IEGE		

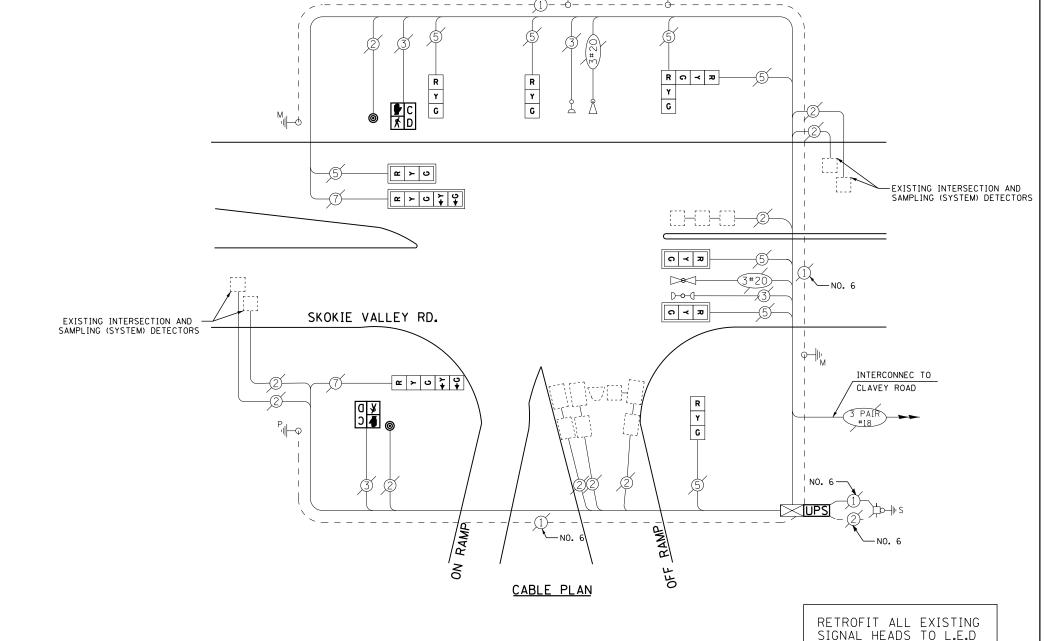

SCHEDULE OF QUANTITIES

<u>JANIIIY</u>	UNII	<u>ITEM</u>
1	EACH	MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION
2	EACH	PEDESTRIAN SIGNAL HEAD, LED. 1-FACE, BRACKET MOUNTED WITH COUNTDOWN
4	EACH	TRAFFIC SIGNAL BACKPLATE, LOUVERED, ALUMINUM
2	EACH	PEDESTRIAN PUSH-BUTTON
1	EACH	MODIFY EXISTING CONTROLLER CABINET
1	EACH	REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT
1	EACH	UNINTERRUPTABLE POWER SUPPLY, SPECIAL
3	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, BRACKET MOUNTED, RETROFIT
3	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED, RETROFIT
1	EACH	SIGNAL HEAD, LED, 1-FACE, 5-SECTION, MAST ARM MOUNTED, RETROFIT
1	EACH	SIGNAL HEAD, LED, 2-FACE, 3-SECTION, BRACKET MOUNTED, RETROFIT
1	EACH	SIGNAL HEAD, LED, 1-FACE, 5-SECTION, BRACKET MOUNTED, RETROFIT

SKOKIE VALLEY ROAD **-(2)-►**

SKOKIE VALLEY ROAD

FILE NAME = N:\Projects3\12004\DesignCAD\Sheet Files 12-001 Sheets SE Lake Co\11877_CAB_LAKE.dgr

DESIGNED REVISED USER NAME = \$USER\$ DW DRAWN JDH REVISED CHECKED KMM REVISED PLOT DATE = 3/28/2012 DATE REVISED

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

U.S. ROL SCHEDULE SCALE: N.T.S.

EACH