ANY TRAFFIC SIGNAL CONTROL EQUIPMENT DAMAGED OR NOT OPERATING PROPERLY FROM ANY CAUSE WHATSOEVER SHALL BE REPAIRED WITH NEW EQUIPMENT PROVIDED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE CONTRACT AND OR OWNER OF THE TRAFFIC SIGNAL SYSTEM, ALL AS APPROVED BY THE ENGINEER.

RESTORATION OF WORK AREA. RESTORATION OF THE TRAFFIC SIGNAL WORK AREA SHALL BE INCIDENTAL TO THE RELATED PAY ITEM SUCH AS FOUNDATION, CONDUIT, HANDHOLE, TRENCH AND BACKFILL, ETC., AND NO EXTRA COMPENSATION SHALL BE ALLOWED. ALL ROADWAY SURFACES SUCH AS SHOULDERS, MEDIANS, SIDEWALKS, PAVEMENT, ETC. SHALL BE REPLACED IN KIND. ALL DAMAGE TO MOWED LAWNS SHALL BE REPLACED WITH AN APPROVED SOD, AND ALL DAMAGE TO UNMOWED FIELDS SHALL BE SEEDED IN ACCORDANCE WITH STANDARD SPECIFICATIONS 252 AND 250 RESPECTIVELY.

I.D.O.T. TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL WATTAGE
TYPE	NO. OF LAMPS	WAT INCAND.	AGE LED >	<pre>< % OPERATION</pre>	
SIGNAL (RED)	8		17	0.50	68.0
(YELLOW)	8		25	0.25	50.0
(GREEN)	6		15	0.25	22.5
ARROW	10		12	0.10	12.0
PED. SIGNAL	0		25	1.00	0.00
CONTROLLER	1		100	1.00	100.0
ENERGY COCTE T	^			TOTAL	252.5
ENERGY COSTS TO: TOTAL =					252.5

ILLINOIS DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS/DISTRICT 2

FILE NAME =

D201500-sht-temp-ts10.cgn

ENERGY SUPPLY: CONTACT: XXX

PHONE: (800) 334-7661

COMPANY: COMED

DESIGNED -MCH REVISED DRAWN MCH REVISED PLOT SCALE = 20.0000 '/ IN. CHECKED DPA REVISED PLOT DATE = 2/3/2012 DATE 01/17/12 REVISED

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

TEMPORARY CABLE PLAN SPRINGFIELD AVENUE AND PRAIRIE ROAD SCALE: SHEET NO. 2 OF 2 SHEETS STA. TO STA.

SPRINGFIELD AVE. --(4)--▶ LEGEND 06 DUAL ENTRY PHASE NUMBER REFERS TO ASSOCIATED PHASE TEMPORARY PHASE DESIGNATION DIAGRAM

COUNTY TOTAL SHEET NO. WINNEBAGO 491 295

CONTRACT NO. 64515

F.A. RTÉ.


742

SECTION

34R

ILLINOIS FED. AID PROJECT

TEMPORARY CONTROLLER SEQUENCE

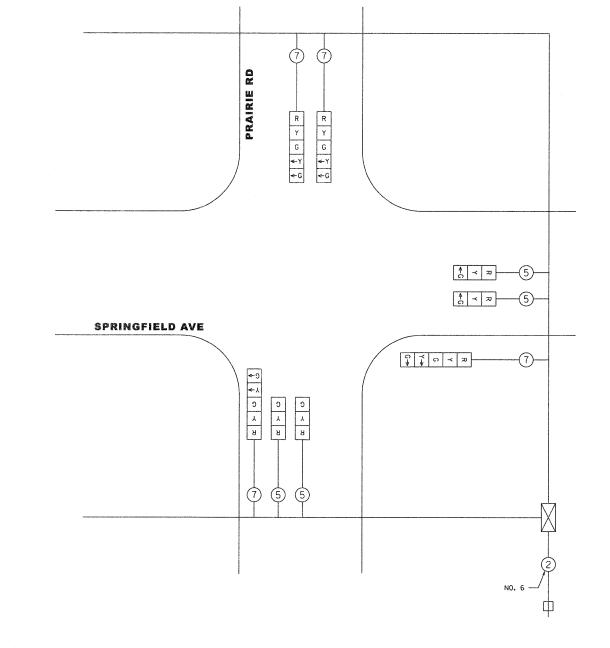

N.T.S.