


EARTH/AGGREGATE PE, FE

LOCATIONS OF ENTRANCES:

STA. 580+82 LT	STA. 581+45 RT
STA. 584+40 LT	STA. 641+51 RT
STA. 592+50 LT	STA. 743+26 RT
STA. 594+70 LT	STA. 912+30 RT
STA. 78+00 LT	STA. 926+00 RT
STA. 804+66 LT	STA. 933+56 RT
STA. 896+53 LT	
STA. 910+05 LT	

EX PAVT WITH PR SURFACE IMPROVEMENTS, SEE TYPICAL SECTIONS

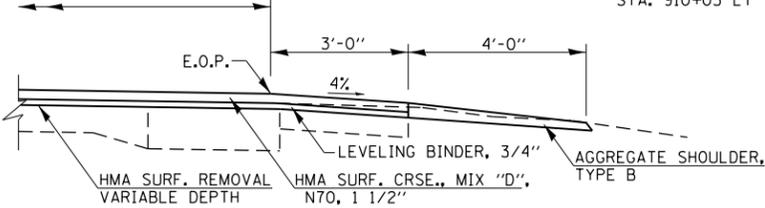

SECTION A-A FOR EARTH/AGGREGATE PE, FE
(NO PROPOSED ENTRANCE WORK)

GENERAL NOTES:

THE RESIDENT ENGINEER WILL DETERMINE THE EXACT TYPE OF IMPROVEMENT TO BE COMPLETED FOR ALL ENTRANCES, SIDEROADS AND MAILBOX TURNOUTS ON THIS PROJECT.


THE PLAN DETAILS AND SCHEDULES SHOULD BE USED AS A GUIDE FOR THE ENGINEER TO IMPLEMENT THE FINAL DESIGN. THE ENGINEER MAY DECIDE TO SALVAGE PORTIONS OF THE EXISTING ENTRANCE PAVEMENT STRUCTURE; THEREFORE, REDUCING PAY ITEM QUANTITIES. NO ADDITIONAL PAYMENT WILL BE ALLOWED FOR THIS REDUCTION IN QUANTITIES.

ANY WORK THE ENGINEER REQUIRES WHICH IS NOT COVERED BY A PAY ITEM CONTAINED IN THE PLANS WILL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS.

HOT-MIX ASPHALT REQUIRED TO IMPROVE THE ENTRANCES SHALL BE IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF SECTION 406 AND 408 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER.

WHEN THE HOT-MIX ASPHALT PROPOSED FOR THE IMPROVEMENT IS THICKER THAN 3 INCHES AND REQUIRE PLACEMENT IN MORE THAN ONE LIFT. THE BOTTOM LIFT(S) SHALL MEET THE REQUIREMENTS OF HMA BASE COURSE IN SECTION 406 OF THE STANDARD SPECIFICATIONS AND THE TOP LIFT OF 1.75 INCHES SHALL MEET THE REQUIREMENTS OF INCIDENTAL HOT-MIX ASPHALT SURFACING.

THIS WORK WILL BE PAID FOR IN ACCORDANCE WITH SECTIONS 351, 358, 408, 423 AND 440 OF THE STANDARD SPECIFICATIONS.

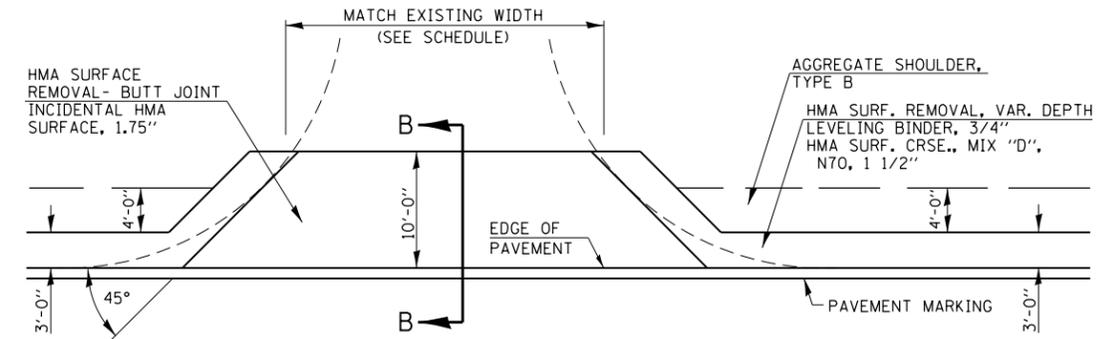


HMA SIDE ROAD


LOCATIONS OF SIDEROADS:

STA. 533+74 LT	STA. 525+94 RT
STA. 563+80 LT	STA. 563+80 RT
STA. 589+88 LT	STA. 589+88 RT
STA. 643+88 LT	STA. 655+00 RT
STA. 668+25 LT	STA. 708+15 RT
STA. 708+15 LT	STA. 858+06 RT
STA. 84+50 LT	STA. 884+43 RT
STA. 858+05 LT	

EX PAVT WITH PR SURFACE IMPROVEMENTS, SEE TYPICAL SECTIONS

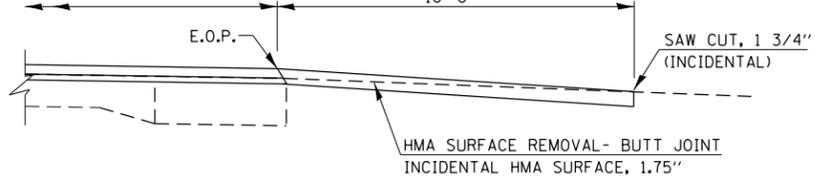

SECTION B-B FOR HMA SIDE ROADS

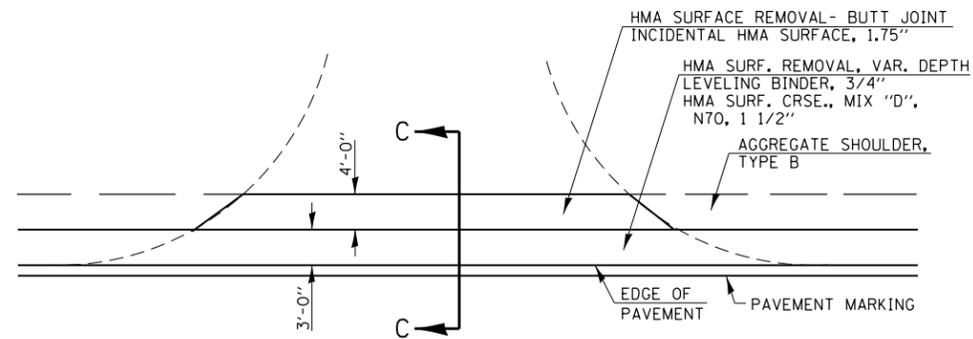


HMA PE, CE


LOCATIONS OF ENTRANCES:

STA. 525+49 LT	STA. 73+44 RT
STA. 564+80 LT	STA. 909+34 RT
STA. 566+52 LT	
STA. 577+84 LT	
STA. 741+01 LT	
STA. 743+20 LT	

EX PAVT WITH PR SURFACE IMPROVEMENTS, SEE TYPICAL SECTIONS

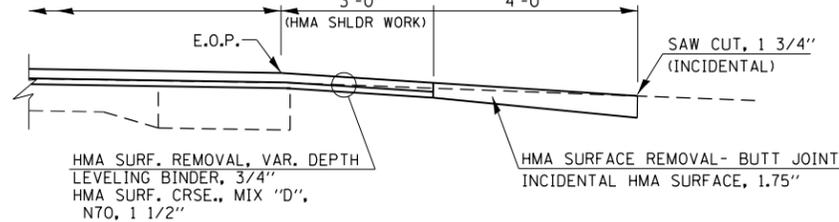

SECTION C-C FOR HMA PE, CE

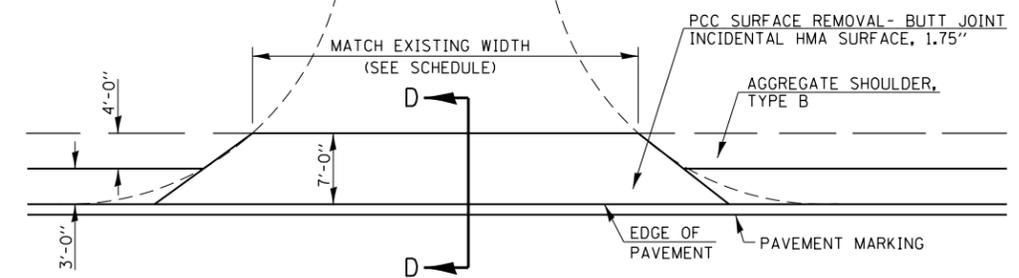


PCC PE, CE

LOCATIONS OF ENTRANCES:

STA. 527+32 LT	STA. 524+12 RT
STA. 529+96 LT	STA. 528+85 RT
STA. 532+35 LT	STA. 529+82 RT
STA. 535+76 LT	STA. 533+74 RT
STA. 745+00 LT	STA. 587+73 RT
STA. 79+50 LT	
STA. 82+48 LT	
STA. 890+65 LT	

EX PAVT WITH PR SURFACE IMPROVEMENTS, SEE TYPICAL SECTIONS

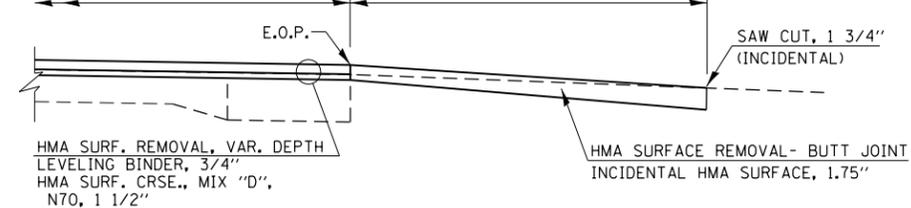

SECTION D-D FOR PCC PE, CE

FILE NAME =	USER NAME = sparksgw	DESIGNED - RTS	REVISED -
ei:\pw\work\p1\dot\sparksgw\10245433\0672E12-sht-details.dgn		DRAWN - RTS	REVISED -
		CHECKED -	REVISED -
		DATE - 3/26/12	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

ENTRANCE AND SIDEROAD DETAILS

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
753	(140RS-6, 141RS-7)I	SANGAMON	98	68
CONTRACT NO. 72E12				
ILLINOIS FED. AID PROJECT				