

06-15-2018 LETTING ITEM 217

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


PROPOSED HIGHWAY PLANS

F.A.I. ROUTE 90/94
(KENNEDY EXPRESSWAY)
SECTION: 2017-0181
PROJECT: NHPP-SJNL (176)
REVLAC PLC REPLACEMENT
COOK COUNTY

C-91-290-17

END IMPROVEMENTS I-94
STA 465+00

END IMPROVEMENTS I-90
LAWRENCE AVENUE

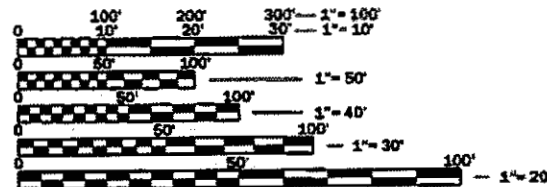

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.


ELECTRICAL MAINTENANCE CONTRACTOR (EMC)
MEADE ELECTRIC - TED TROYNER
1-708-588-2544

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123 OR 811

C.U.A.N.
CHICAGO UTILITY ALERT NETWORK
1-312-744-7008

PROJECT ENGINEER: ROLAND TOMSONS
PROJECT MANAGER: MARK JENKINS

CONTRACT NO. 62F40

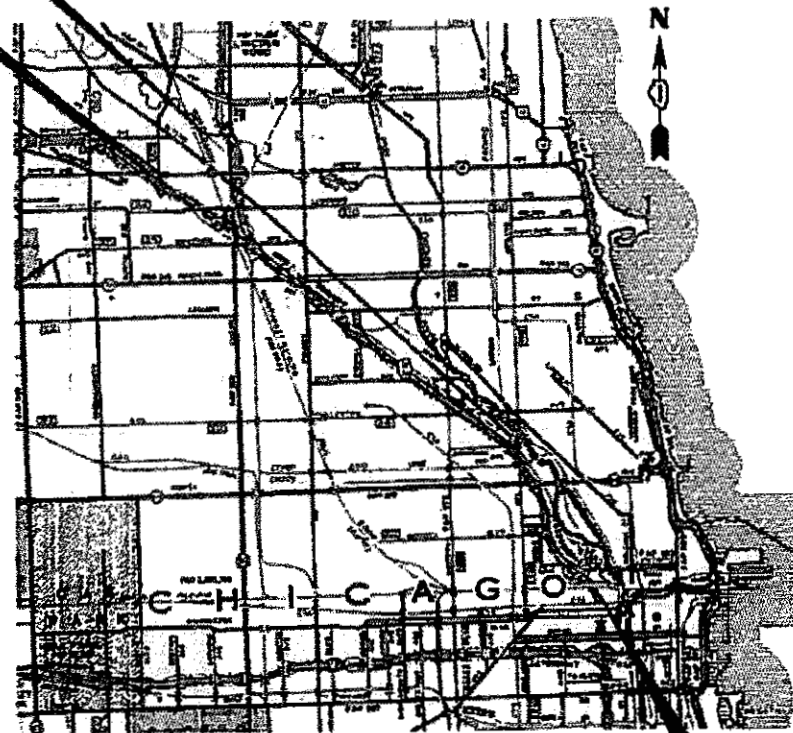

TOWNSHIP: CHICAGO

BEGIN IMPROVEMENTS I-90/94
W. LAKE ST

GROSS LENGTH = 51,600 FT. = 9.773 MILE
NET LENGTH = 28,800 FT. = 5.455 MILE

JACOBS

F.A.I. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94	2017-0181	COOK	36	1
CONTRACT NO. 62F40				

D-91-290-17



LOCATION OF SECTION INDICATED THUS: -

FUNCTIONAL CLASSIFICATION
INTERSTATE (URBAN)
2013 ADT = 280,000



Robert Swanson 10/5/17
ROBERT SWANSON, P.E. DATE
LICENSE NO.: 062-058808
EXPIRES: 11-30-2017
SHEETS: 1-36



Anthony J. Buehler 10/5/17
ANTHONY BUEHLER, P.E. DATE
LICENSE NO.: 062-058808
EXPIRES: 11-30-2017
SHEETS: 28-34

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 14 DEC 2017
Anthony J. Buehler REGIONAL ENGINEER
Feb 2 2018
Anthony J. Buehler ENGINEER OF DESIGN AND ENVIRONMENT
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

1	COVER PAGE
2	INDEX OF SHEETS, HIGHWAY STANDARDS, AND GENERAL NOTES
3	SUMMARY OF QUANTITIES
4	SUMMARY OF QUANTITIES
5	REMOVAL PLANS - BUILDING A PLC/VDT ENCLOSURE
6	REMOVAL PLANS - BUILDING C PLC/VDT ENCLOSURE
7	REMOVAL PLANS - BUILDING D PLC/VDT ENCLOSURE
8	REMOVAL PLANS - BUILDING E PLC/VDT ENCLOSURE
9	REMOVAL PLANS - BUILDING HQ PLC/VDT ENCLOSURE
10	EXISTING ETHERNET COMMUNICATION NETWORK LAYOUT
11	EXISTING LEASED LINE COMMUNICATION NETWORK LAYOUT
12	BUILDING A - NEW PLC/VDT ENCLOSURE MODIFICATIONS
13	BUILDING A - BILL OF MATERIAL AND POWER LADDER
14	BUILDING A - NEW PLC/VDT NETWORK ARCHITECTURE
15	BUILDING C - NEW PLC/VDT ENCLOSURE MODIFICATIONS
16	BUILDING C - BILL OF MATERIAL AND POWER LADDER
17	BUILDING C - NEW PLC/VDT NETWORK ARCHITECTURE
18	BUILDING D - NEW PLC/VDT ENCLOSURE MODIFICATIONS
19	BUILDING D - BILL OF MATERIAL AND POWER LADDER
20	BUILDING D - NEW PLC/VDT NETWORK ARCHITECTURE
21	BUILDING E - NEW PLC/VDT ENCLOSURE MODIFICATIONS
22	BUILDING E - BILL OF MATERIAL AND POWER LADDER
23	BUILDING E - NEW PLC/VDT NETWORK ARCHITECTURE
24	HEADQUARTERS BUILDING - NEW PLC/VDT ENCLOSURE MODIFICATIONS
25	HEADQUARTERS BUILDING - BILL OF MATERIAL AND POWER LADDER
26	HEADQUARTERS BUILDING - NEW PLC/VDT NETWORK ARCHITECTURE
27	SEQUENCE OF OPERATION - REVLAC CONTROL SYSTEM
28	STAGING PLAN - REVLAC PLC CONTROL SYSTEM UPGRADE
29	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 1 - OUTBOUND ONTARIO, OO
30	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 2 - OUTBOUND MAINLINE, OM
31	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 3 - OUTBOUND SLIP RAMP, OS
32	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 4 - INBOUND SLIP RAMP, IS
33	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 5 - INBOUND EDENS, IE
34	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 6 - INBOUND WEST LEG, IW
35	ENTRANCE AND EXIT RAMP CLOSURE DETAILS TC-08
36	TRAFFIC CONTROL DETAILS FOR FREEWAY SHOULDER CLOSURES AND PARTIAL RAMP CLOSURES TC-17

GENERAL NOTES:

1. THE BILL OF MATERIAL SHOWN IN THE PLANS LISTS THE MAJOR COMPONENTS NEEDED FOR THE PLC UPGRADE AT EACH LOCATION. THE CONTRACTOR IS RESPONSIBLE FOR ALL PARTS NEEDED FOR A COMPLETE WORKING SYSTEM.
2. FIELD TESTING OF THE ROADWAY DEVICES SHALL NOT BE PERFORMED DURING THE SNOW SEASON WHICH FALLS BETWEEN OCTOBER 31 AND APRIL 1.
3. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN THE FIELD AND SHALL SUBMIT COMPLETE SHOP DRAWINGS TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCING WORK.
4. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS MATCH THOSE SHOWN IN THE PLANS. IF EXISTING CONDITIONS ARE FOUND TO BE DIFFERENT THAN SHOWN IN THE PLANS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING.
5. ALL FIELD TESTING WILL BE REQUIRED TO BE PERFORMED ON NIGHTS OR WEEKENDS AS PERMITTED BY TRAFFIC CONTROL.
6. THE CONTRACTOR SHALL SUBMIT ALL DAILY AND REVERSIBLE LANE CLOSURES REQUESTS VIA WWW.IDOTLCS.COM AT LEAST 24 HOURS IN ADVANCE OF ALL DAILY LANE, RAMP AND SHOULDER CLOSURES. IN THE EVENT THAT PERMISSION IS NOT AVAILABLE THROUGH THE WEBSITE, THE CONTRACTOR SHALL REQUEST AND GAIN THE APPROVAL FROM THE ILLINOIS DEPARTMENT OF TRANSPORTATION'S EXPRESSWAY TRAFFIC OPERATIONS ENGINEER (847-705-4151)
7. DMS AND REVLAC OVERHEAD SIGNS WILL NOT REQUIRE ADDITIONAL SIGNS, SIGN COVERING OR TREATMENTS DURING TESTING. ALL EXISTING OVERHEAD SIGNS CAN REMAIN VISIBLE TO THE MOTORISTS DURING TESTING OF ALL NEW PLC UPGRADE EQUIPMENT.

701106-02
701400-09
701401-11
701428-01
701901-07

IDOT HIGHWAY STANDARDS:

OFF-ROAD OPERATIONS, >15' AWAY
APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
LANE CLOSURE, FREEWAY/EXPRESSWAY
TRAFFIC CONTROL SETUP & REMOVAL FREEWAY/EXPRESSWAY
TRAFFIC CONTROL DEVICES

DISTRICT 1 STANDARDS:

TC-08
TC-17

FREEWAY ENTRANCE AND EXIT RAMP CLOSURE DETAILS
TRAFFIC CONTROL DETAILS FOR FREEWAY SHOULDER
CLOSURES AND PARTIAL RAMP CLOSURES

ABBREVIATIONS

A	AMPERE
ABBR	ABBREVIATIONS
AC	ALTERNATING CURRENT
AMP	AMPERE
AR	AS REQUIRED
AUX	AUXILIARY
AVE	AVENUE
BL	BLACK
BLDG	BUILDING
CB	CIRCUIT BREAKER
CPU	CONTROL PROCESSING UNIT
CR	CONTROL RELAY
DC	DIRECT CURRENT
DI	DIGITAL INPUT
DMS	DYNAMIC MESSAGE SIGN
DO	DIGITAL OUTPUT
DVD	DIGITAL VIDEO DRIVE
DWG	DRAWING
F	FUSE
G	GREEN
GND	GROUND
H	HOT
HMI	HUMAN MACHINE INTERFACE
HZ	HERTZ
IN	INPUT
I/O	INPUTS/OUTPUTS
IDOT	ILLINOIS DEPARTMENT OF TRANSPORTATION
LAN	LOCAL AREA NETWORK
LOC	LOCAL
MBYTES	MEGABYTES
MM	MULTI MODE
N	NEUTRAL
NTS	NOT TO SCALE
OL	OVERLOAD
OUT	OUTPUT
PB	PUSH BUTTON
PC	PLC CABINET
PL	PILOT LIGHT
PLC	PROGRAMMABLE LOGIC CONTROLLER
REM	REMOTE
REVLAC	REVERSIBLE LANE ACCESS CONTROL SYSTEM
RIO	REMOTE INPUT OUTPUT
SHT	SHEET
S/S	SELECTOR SWITCH
SM	SINGLE MODE
SUP	SUPPLY
TB	TERMINAL BLOCK
TERM	TERMINAL
TYP	TYPICAL
V	VOLTS
VAC	VOLTS ALTERNATING CURRENT
VDC	VOLTS DIRECT CURRENT
VDI	VIDEO DISPLAY TERMINAL
WH	WHITE

MAINTENANCE OF TRAFFIC NOTES:

1. THE CONTRACTOR'S VEHICLES MUST ALWAYS MOVE WITH AND NOT AGAINST OR ACROSS THE FLOW OF TRAFFIC. THEY MUST ENTER OR LEAVE WORK AREAS IN A MANNER WHICH IS NOT HAZARDOUS TO TRAFFIC AND WILL NOT INTERFERE WITH NORMAL TRAFFIC. THE CONTRACTOR'S VEHICLES MUST NOT PARK OR STOP EXCEPT WITHIN DESIGNATED WORK AREAS. PERSONAL VEHICLES ARE NOT PERMITTED TO PARK WITHIN THE RIGHT-OF-WAY EXCEPT IN AREAS DESIGNATED BY THE ENGINEER.
2. THE NUMBER OF NIGHTS REQUIRED FOR EACH RAMP TO BE INDIVIDUALLY CLOSED IS PAID FOR UNDER 'TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 'X'. THE NUMBER OF NIGHTS REQUIRED FOR ALL SIX RAMP TO BE CLOSED SIMULTANEOUSLY WILL BE PAID FOR UNDER 'TRAFFIC CONTROL AND PROTECTION, STANDARD 701401 (SPECIAL).'
3. CONTRACTOR WILL BE REQUIRED TO REMOVE ALL TRAFFIC CONTROL DEVICES FROM THE IDOT RIGHT-OF-WAY AT THE END OF EACH WORKING NIGHT. STORING TRAFFIC CONTROL DEVICES ON TOP OF BARRIER WALL IS UNACCEPTABLE AND IS NOT ALLOWED.
4. THE FOLLOWING DISTRICT 1 STANDARDS SHALL BE APPLIED AT ALL SITES: TC-08, TC-17.
5. FOR STABILIZATION, ALL TYPE III BARRICADES SHALL REQUIRE A MINIMUM OF FOUR SAND BAGS PER BARRICADE.
6. THE CONTRACTOR SHALL CONTACT THE DISTRICT ONE EXPRESSWAY TRAFFIC CONTROL SUPERVISOR AT (847) 705-4155 A MINIMUM OF 3 BUSINESS DAYS BEFORE BEGINNING WORK.

SHEET 4	FILE NAME =	USER NAME = \$USER\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF DRAWINGS, HIGHWAY STANDARDS, AND GENERAL NOTES			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	\$FILES\$		DRAWN - PA	REVISED -					90/94	2017-018I	COOK	36	2
	\$MODEL\$NAMRS	PLOT SCALE = \$SCALES	CHECKED - MSS	REVISED -		SCALE:	SHEET 2	OF 36	SHEETS	STA.	TO STA.	CONTRACT NO. 62F40	
		PLOT DATE = \$DATES	DATE - 10/6/2017	REVISED -						ILLINOIS	FED. AID PROJECT		

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE					
				90% FEDERAL					
				10% STATE					
				REVLAC					
				044					
				URBAN					
70104205	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 1	EACH	3	3					
70104210	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 2	EACH	3	3					
70104215	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 3	EACH	3	3					
70104220	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 4	EACH	3	3					
70104225	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 5	EACH	3	3					
70104230	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 6	EACH	3	3					
X7010237	CHANGEABLE MESSAGE SIGN, SPECIAL	CAL DAY	3	3					
X7010410	SPEED DISPLAY TRAILER	CAL MO	1	1					
X7010206	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401 (SPECIAL)	EACH	3	3					
X7015005	CHANGEABLE MESSAGE SIGN	CAL DAY	18	18					
X1400299	BUDGETARY ALLOWANCE FOR EMC SUPPORT SERVICES	LSUM	1	1					
X1400290	BUDGETARY ALLOWANCE FOR UPGRADE OF PLC CONTROLS	LSUM	1	1					
X1400291	REVLAC CONTROL SYSTEM PLC PROCESSOR HARDWARE UPGRADE, INSTALLATION	EACH	5	5					
X1400292	REVLAC CONTROL SYSTEM PLC PROCESSOR HARDWARE UPGRADE, MATERIAL	EACH	5	5					


* SPECIALTY ITEM

FILE NAME = \$FILES\$ \$MODEL\$NAMES	USER NAME = \$USER\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES				F.A.I. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = \$SCALE\$	CHECKED - MBS	REVISED -						90/84	2017-018I	COOK	36	3
	PLOT DATE = \$DATES	DATE - 10/8/2017	REVISED -		SCALE: NONE SHEET 3 OF 36 SHEETS STA. TO STA.				CONTRACT NO. 62F40				


[illegible]

* SPECIALTY ITEM

FILE NAME = \$FILESS SMODELNAME\$ REPORTS	USER NAME = \$USERS	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	R.A.I. RTE. 90/94	SECTION 2017-0181	COUNTY COOK	TOTAL SHEETS 36	SHEET NO. 4			
		DRAWN - PA	REVISED -									
	PLOT SCALE = \$SCALE\$	CHECKED - MBS	REVISED -									
	PLOT DATE = \$DATE\$	DATE - 10/6/2017	REVISED -									
SCALE: NONE					SHEET 4	OF 36	SHEETS	STA.	TO STA.	CONTRACT NO. 62F40		
					ILLINOIS					FED. AID PROJECT		

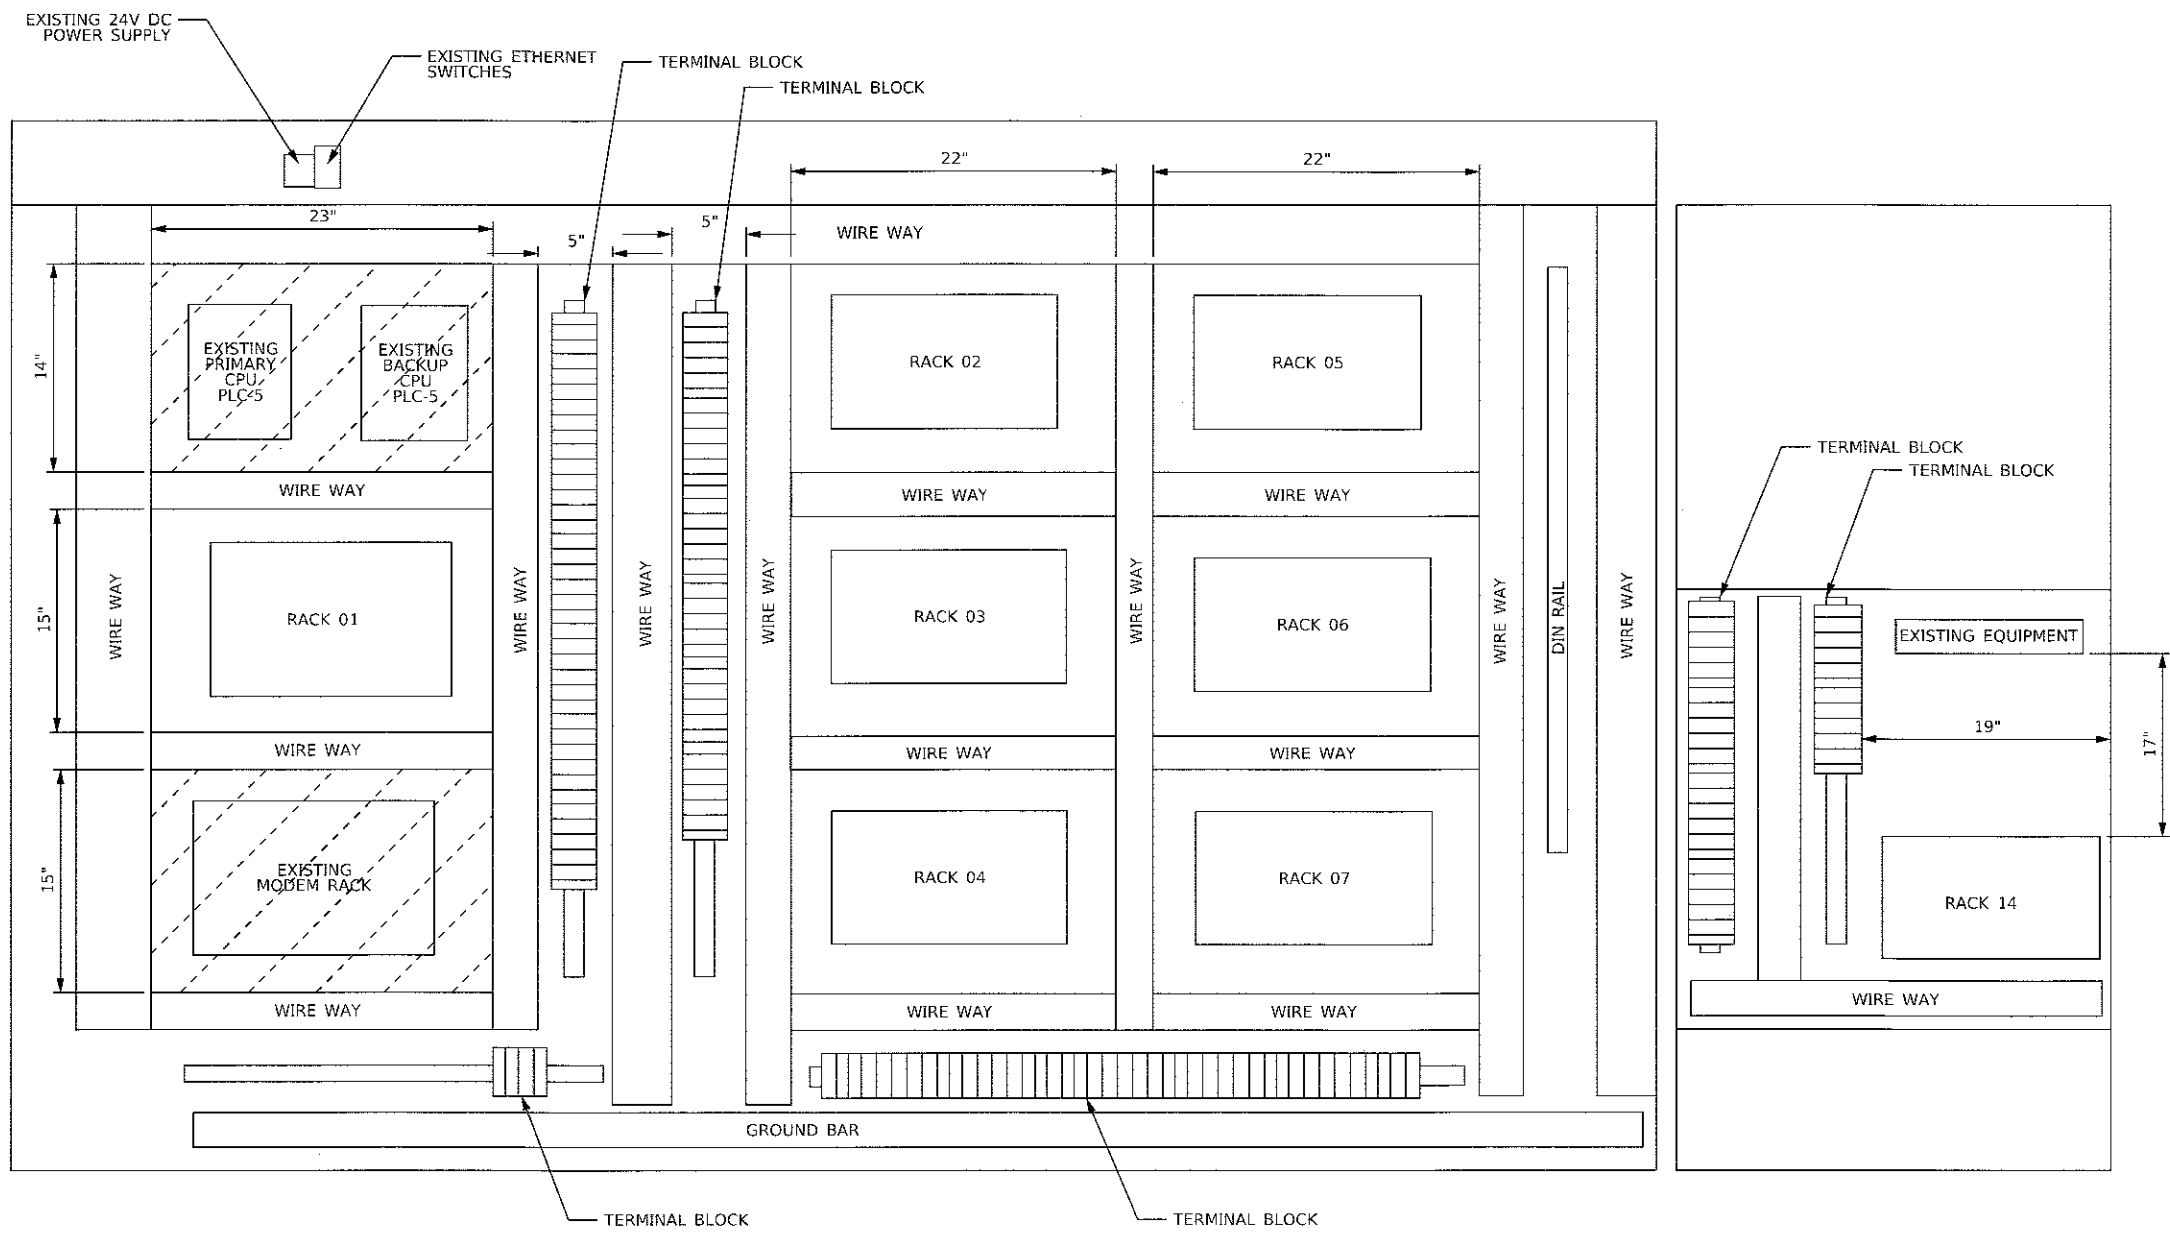


LEGEND

 CROSSHATCHING INDICATES WIRE OR DEVICE TO BE REMOVED

NOTES:


1. CONTRACTOR SHALL REMOVE EXISTING MODEMS AND REPLACE THEM WITH NEW WITH ETHERNET BASED MODEMS. REFER TO SHEET 16 BILL OF MATERIAL ITEM 12 FOR NEW MODEM DETAILS.
2. SEE SHEET 28 FOR SUGGESTED STAGING PLAN FOR REV-LAC PLC CONTROL SYSTEM UPGRADE.
3. REFER TO SHEET 15 FOR NEW PANEL LAYOUT.
4. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS MATCH THOSE SHOWN IN THE PLANS. IF EXISTING CONDITIONS ARE FOUND TO BE DIFFERENT THAN SHOWN IN THE PLANS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING.

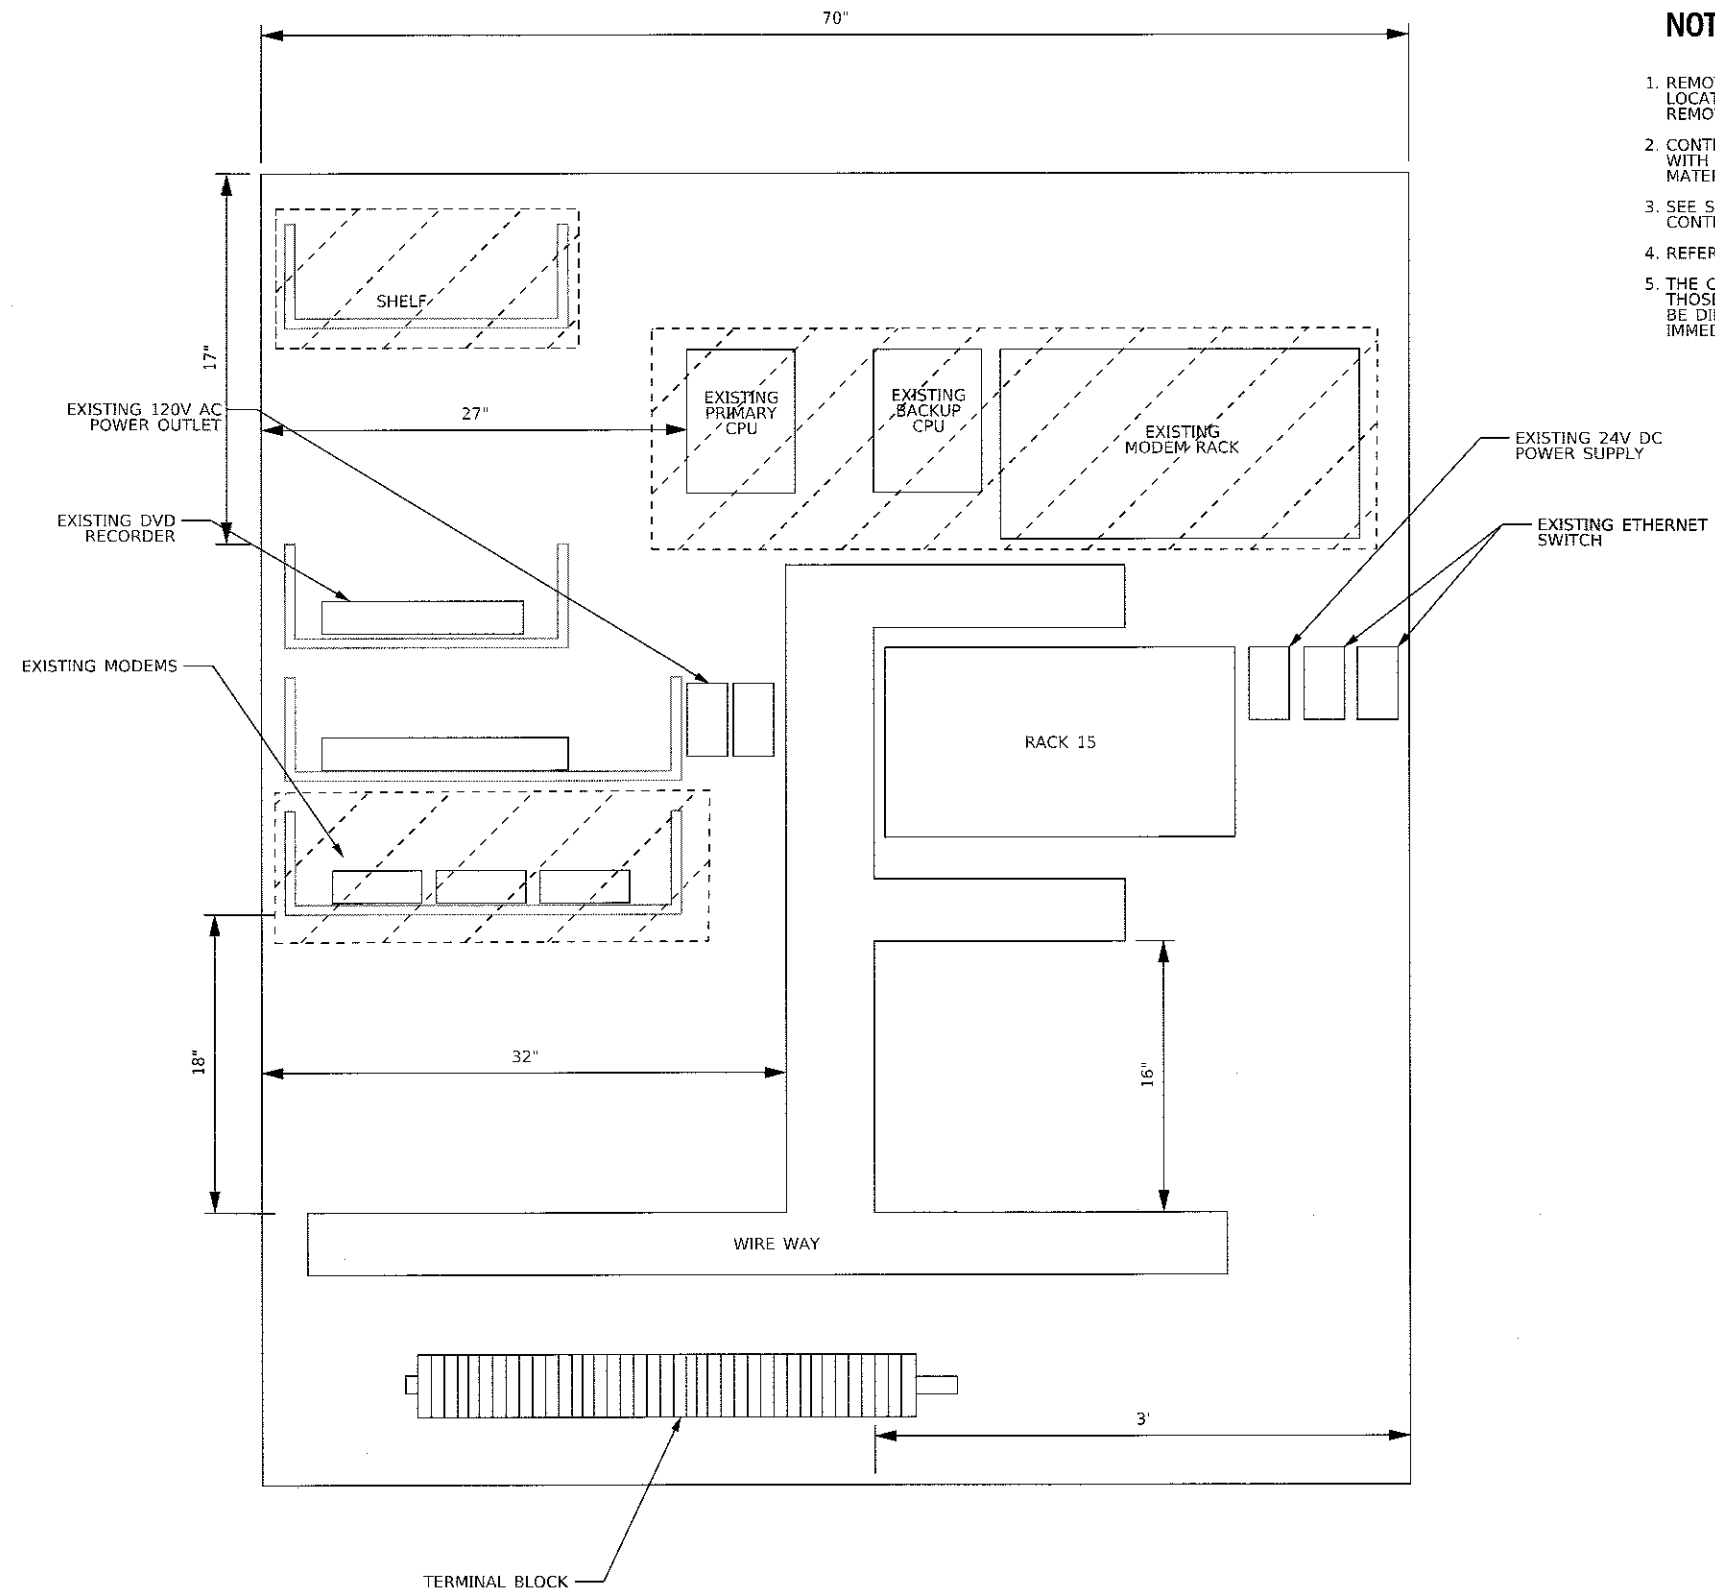

NOTES:

1. REMOTE I/O RACK 12 IS NOT SHOWN FOR CLARITY. THIS RACK IS LOCATED ON THE BOTTOM OF THE CABINET AND WILL NOT BE REMOVED.
2. CONTRACTOR SHALL REMOVE EXISTING MODEMS AND REPLACE THEM WITH NEW ETHERNET BASED MODEM. REFER TO SHEET 25 BILL OF MATERIAL ITEM 12 FOR NEW MODEM DETAILS.
3. SEE SHEET 28 FOR SUGGESTED STAGING PLAN FOR REV/LAC PLC CONTROL SYSTEM UPGRADE.
4. REFER TO SHEET 24 FOR NEW PANEL LAYOUT.
5. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS MATCH THOSE SHOWN IN THE PLANS. IF EXISTING CONDITIONS ARE FOUND TO BE DIFFERENT THAN SHOWN IN THE PLANS, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER IN WRITING.


LEGEND

 CROSSHATCHING INDICATES WIRE OR DEVICE TO BE REMOVED

FILE NAME = \$FILESS	USER NAME = \$USERS		DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	REMOVAL PLANS - BUILDING HQ PLC/VDT ENCLOSURE				P.A.L. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			DRAWN - PA	REVISED -						90/94	2017-0181	COOK	36	9
	PLOT SCALE = \$SCALES		CHECKED - MBS	REVISED -						CONTRACT NO. 62F40				
	PLOT DATE = \$DATES		DATE - 10/6/2017	REVISED -		SCALE: NTS	SHEET 9	OF 36	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

NOTES:


1. FIBER CONNECTING BUILDING "C" TO BUILDING "A" IS ROUTED VIA BUILDING "D".
2. ALL EQUIPMENT AND NETWORK CABLING SHOWN IN THIS SHEET IS EXISTING AND IS FOR CONTRACTOR REFERENCE ONLY.

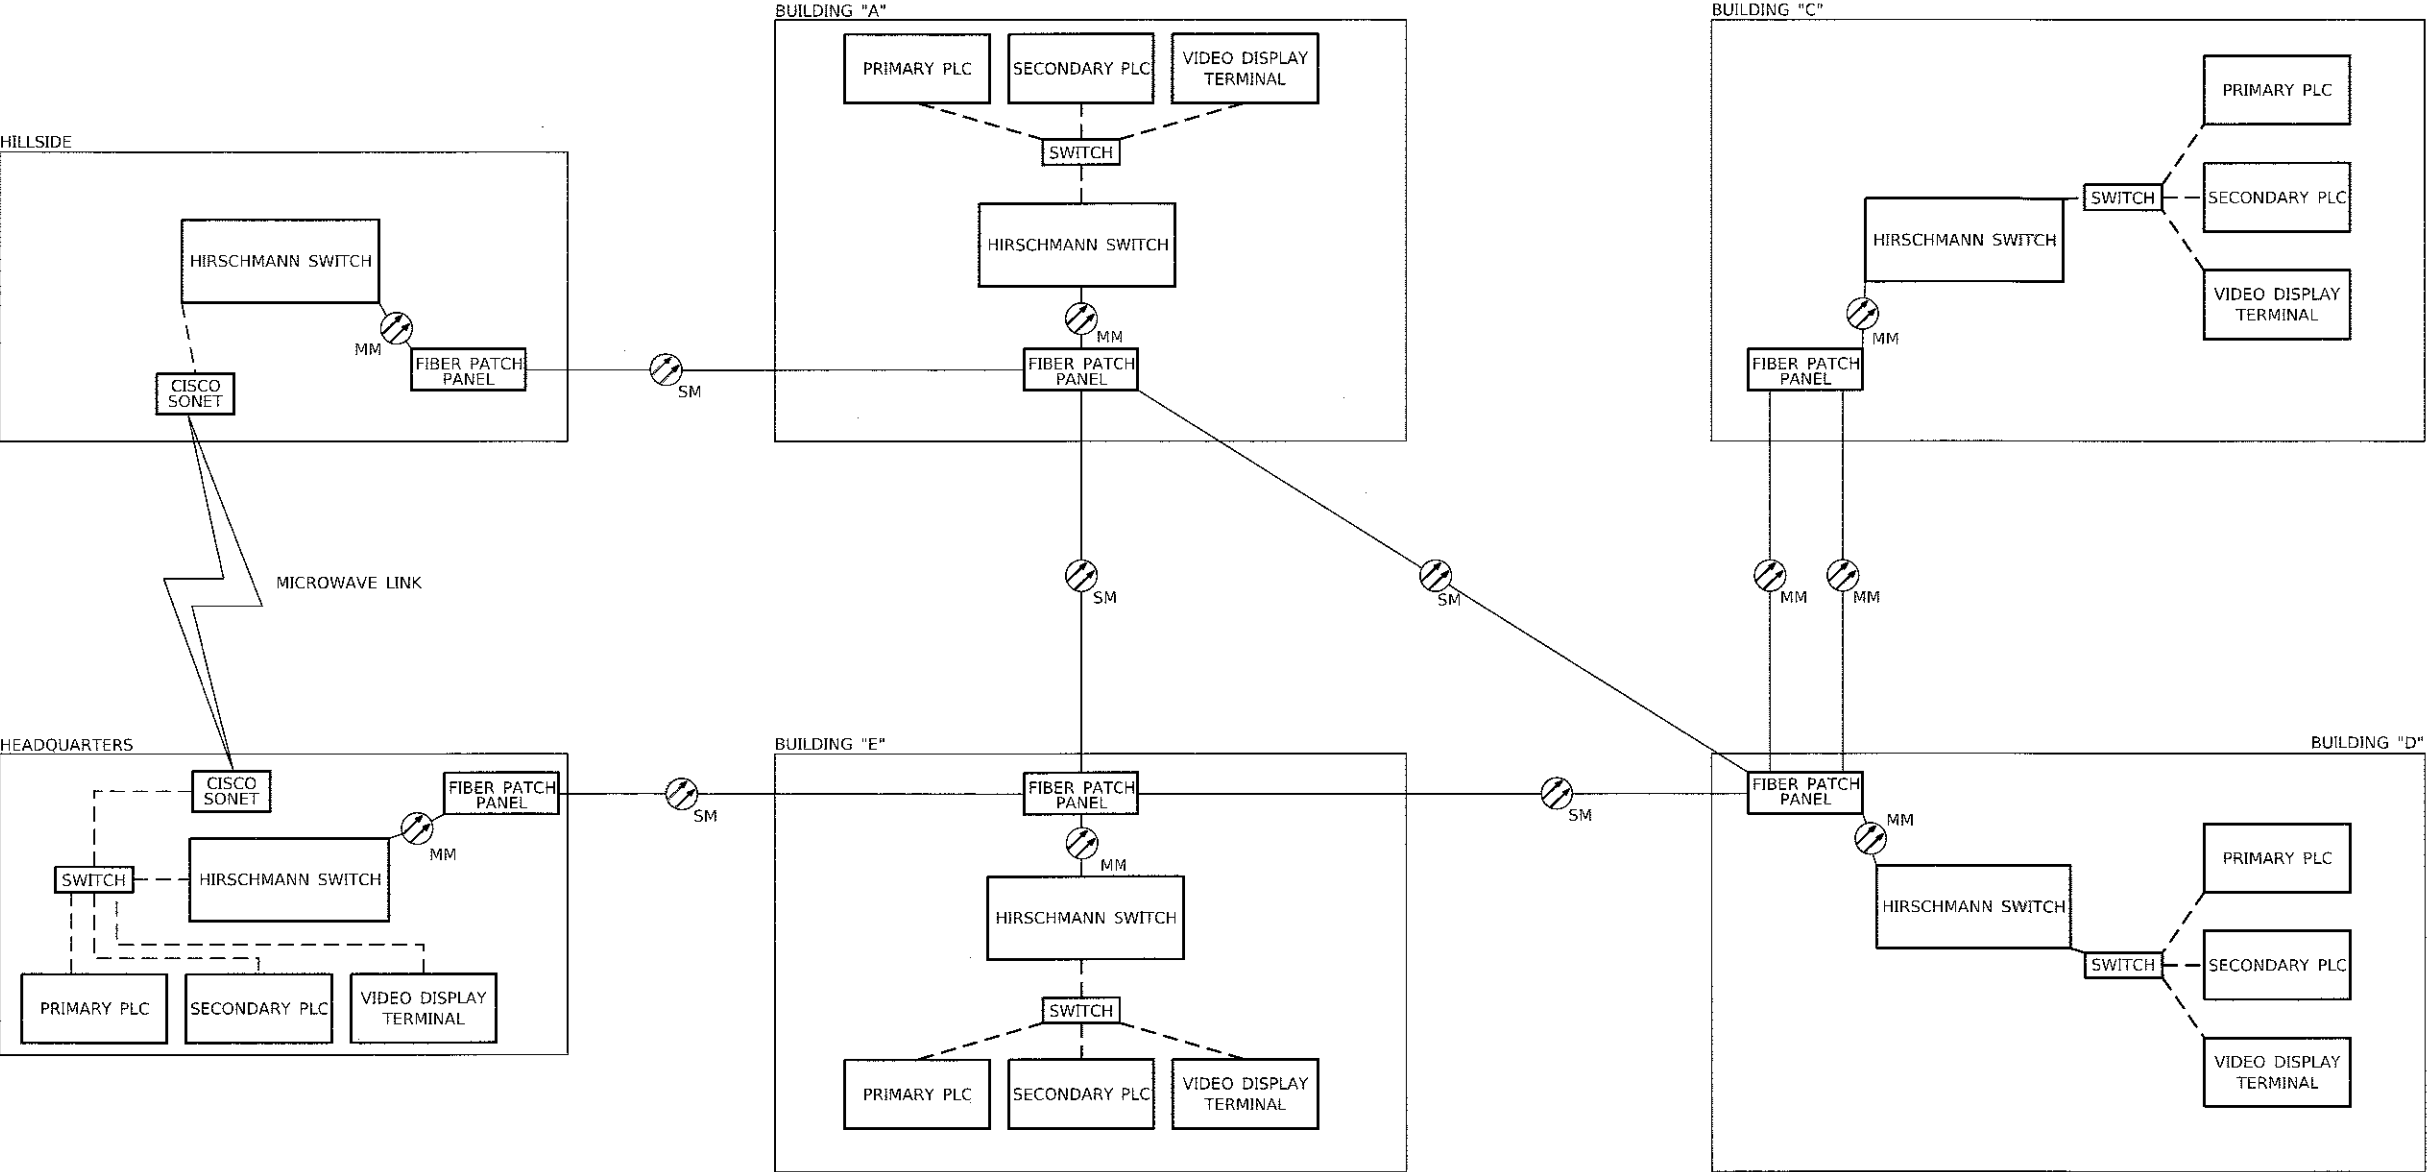


LEGEND

- CAT-6 UNLESS NOTED OTHERWISE
- SM --- SINGLE MODE FIBER PAIR
- MM --- MULTI MODE FIBER PAIR

FILE NAME = \$FILES\$ \$MODELNAME\$	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	EXISTING ETHERNET COMMUNICATION NETWORK LAYOUT				F.A.I. RTE. 90/94	SECTION 2017-0181	COUNTY COOK	TOTAL SHEETS 36	SHEET NO. 10
	PLOT SCALE = \$SCALES\$	DRAWN - PA	REVISED -						CONTRACT NO. 62F40				
	PLOT DATE = \$DATES\$	CHECKED - MBS	REVISED -		SCALE: SHEET 10 OF 36 SHEETS STA. TO STA.				ILLINOIS FED. AID PROJECT				
	DATE - 10/6/2017	REVIS	REVISED -										

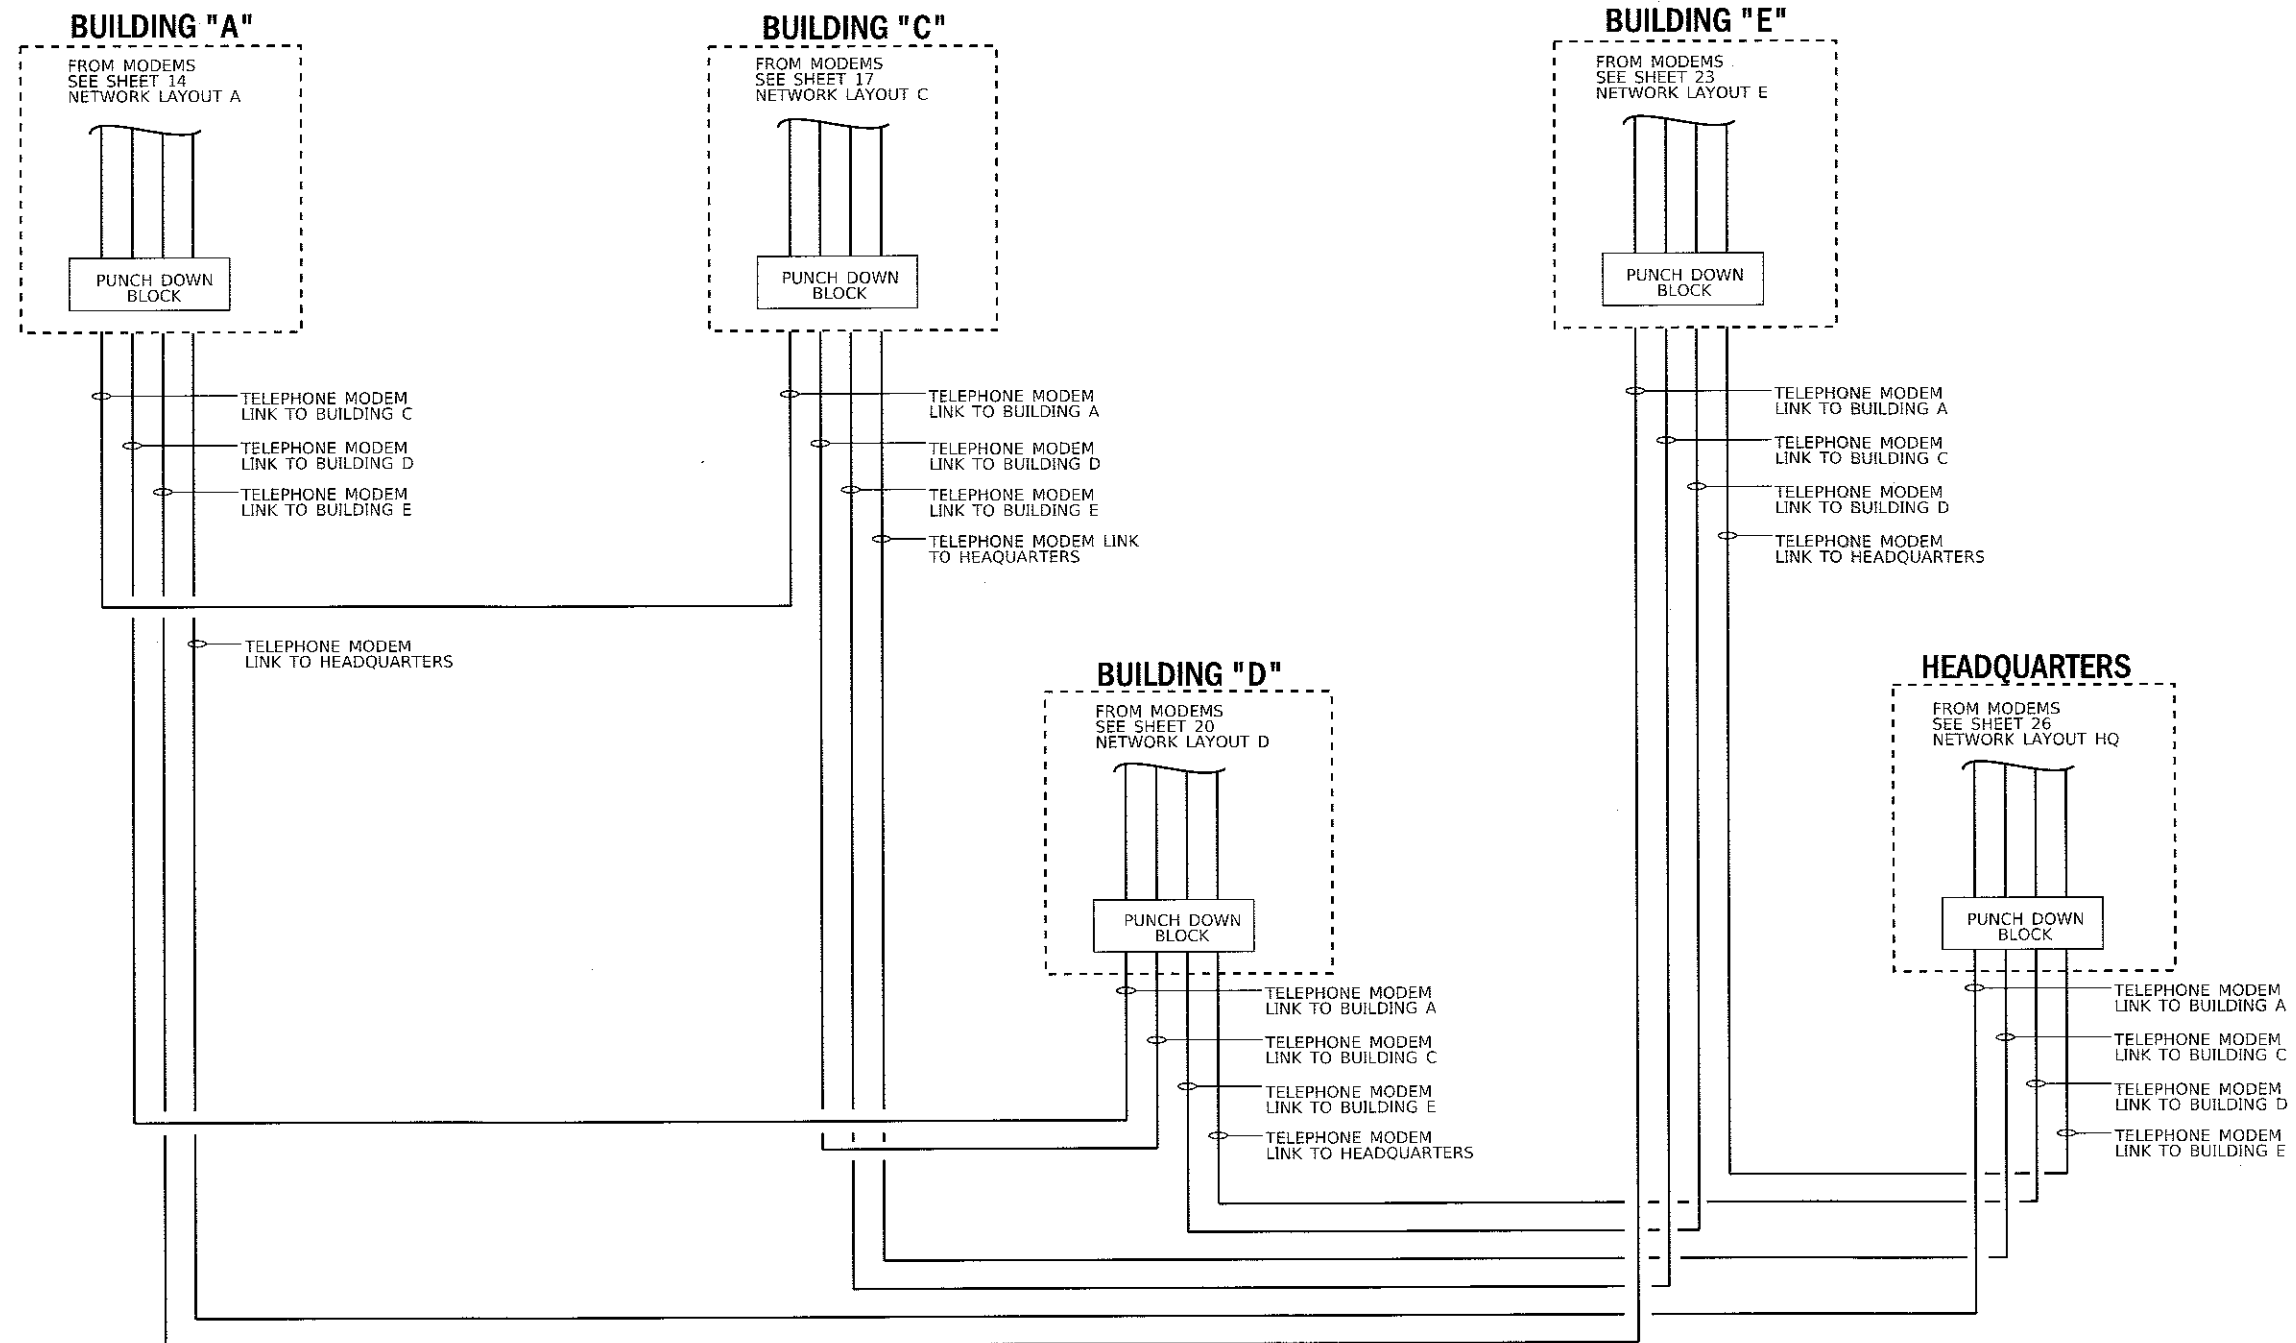

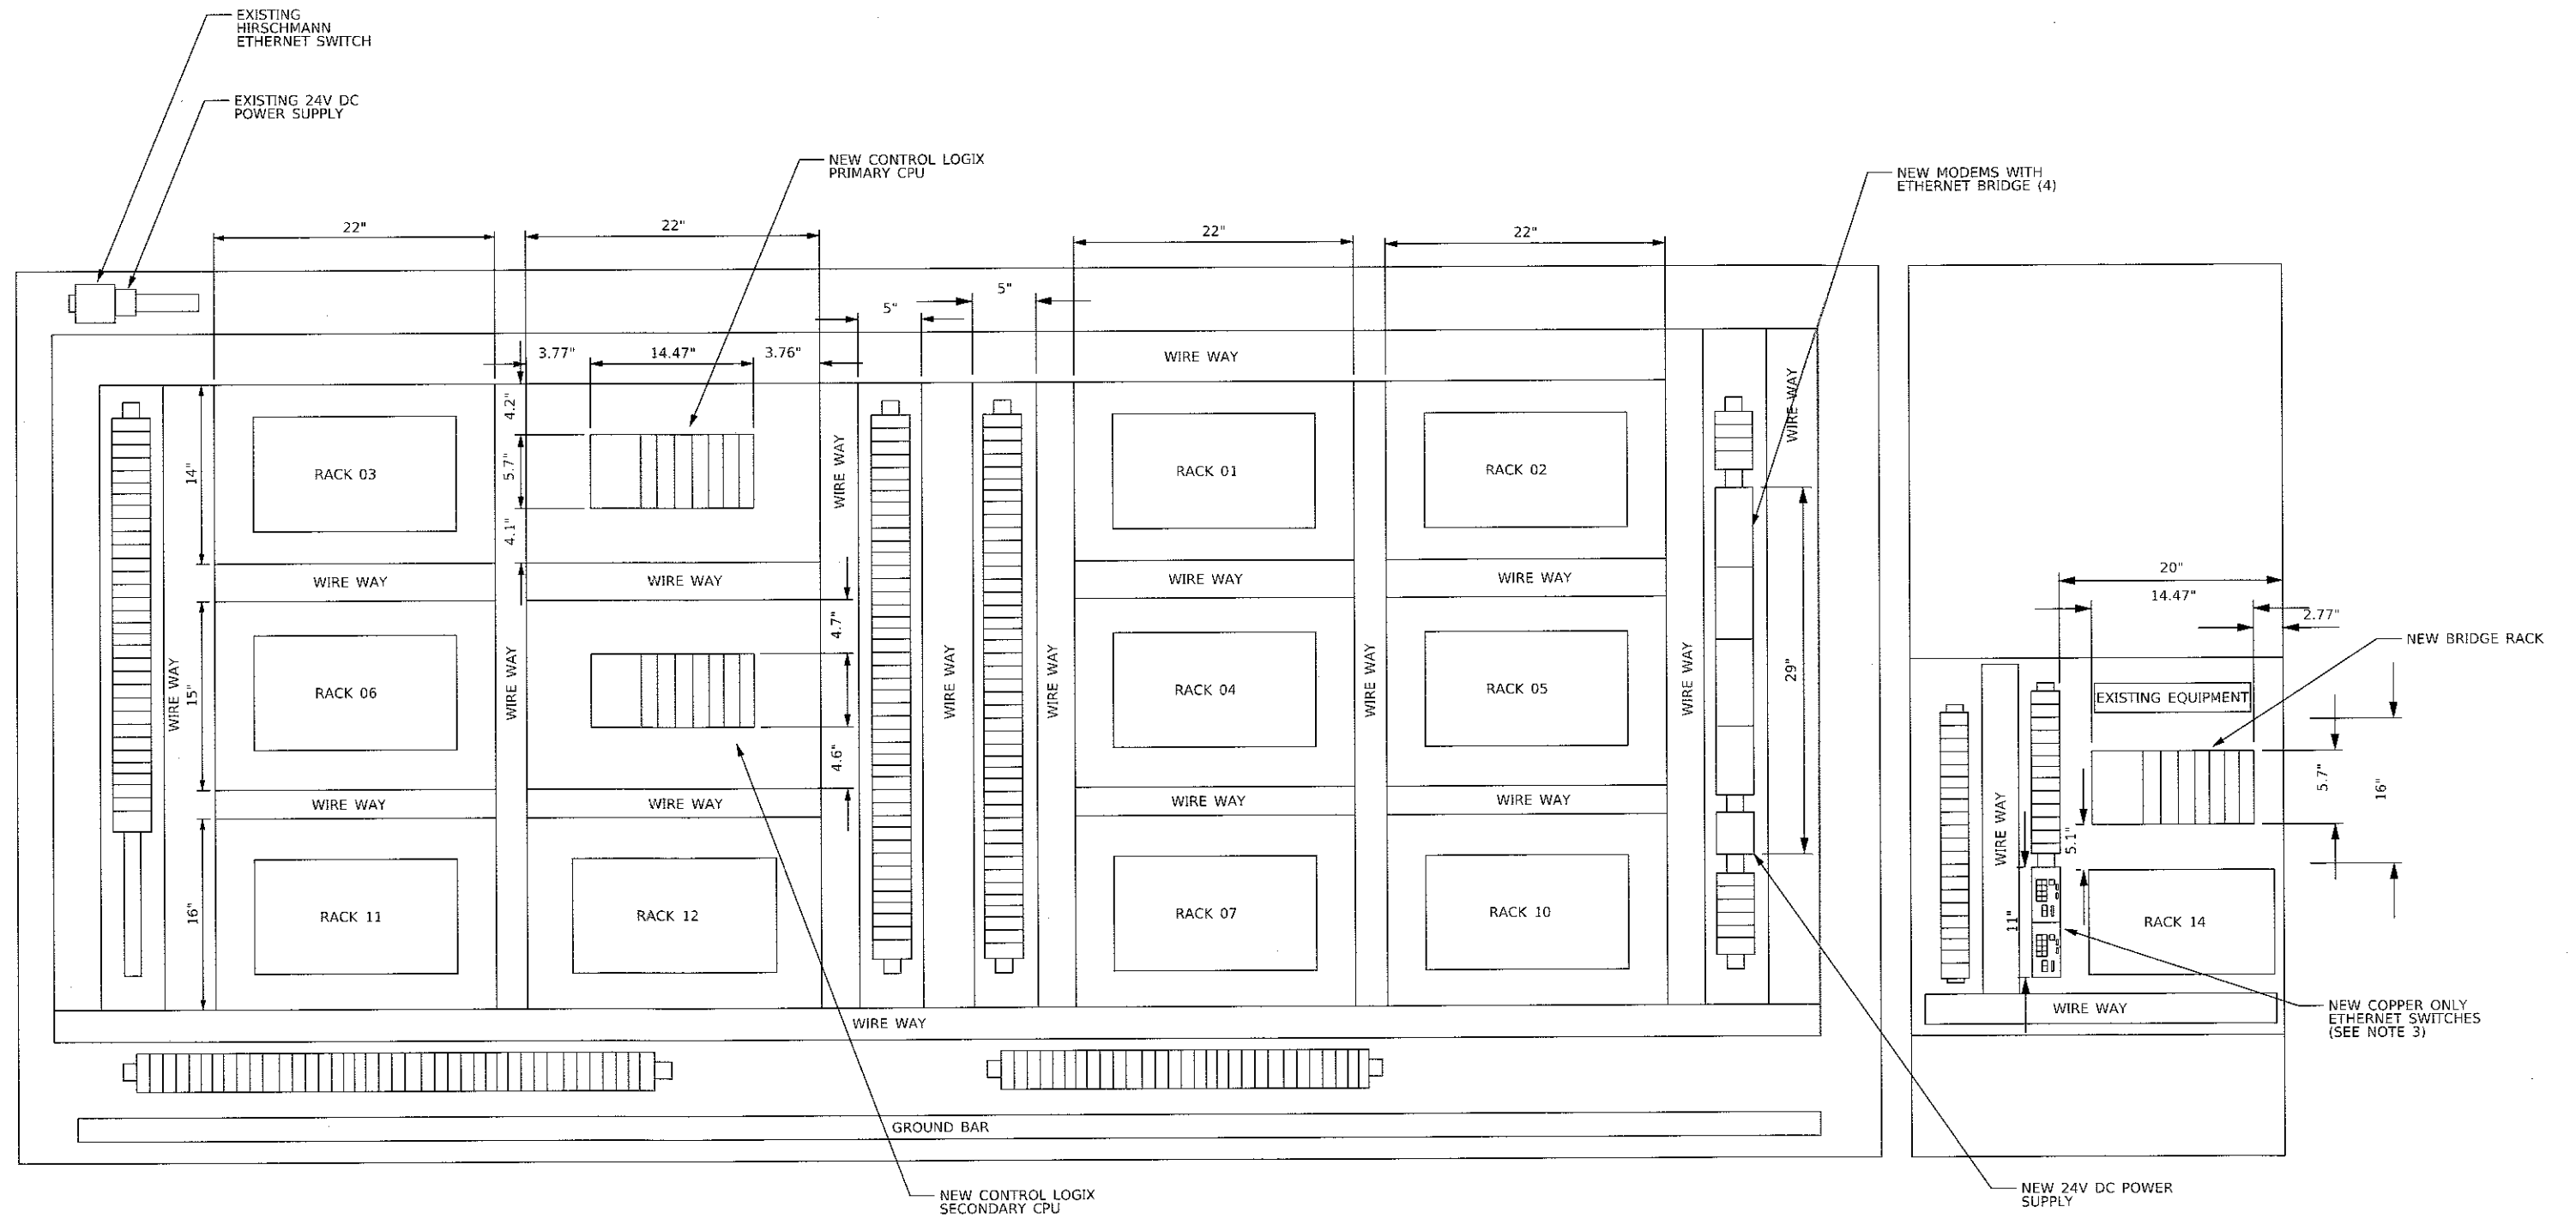


NOTES:

1. SEE SHEET 28 FOR SUGGESTED STAGING PLAN FOR REVLAAC PLC CONTROL SYSTEM UPGRADE.
2. TEMPORARY 120VAC POWER REQUIRED DURING FIELD TESTING IS OBTAINED FROM A 120VAC POWER RECEPTACLE LOCAL TO THE BUILDING. NO EMERGENCY POWER REQUIRED DURING FIELD TESTING.
3. CONTRACTOR SHALL REFERENCE SHEET 13 FOR BILL OF MATERIALS AND POWER LADDER.


FILENAME = \$FILES\$ \$MODELNAME\$	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUILDING A - NEW PLC/VDT ENCLOSURE MODIFICATIONS			P.A.L. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - PA	REVISED -					90/94	2017-0181	COOK	36	12
	PLOTSCALE = \$SCALES	CHECKED - MBS	REVISED -					CONTRACT NO. 62F40				
	PLOTDATE = \$DATES\$	DATE - 10/6/2017	REVISED -		SCALE:	SHEET 12 OF 36 SHEETS	STA.	TO STA.		ILLINOIS	FED. AID PROJECT	

BILL OF MATERIAL - BUILDING A (SEE NOTE 1)				
ITEM	DESCRIPTION	MANUFACTURER	QUANTITY	CATALOG NUMBER
1	7 SLOT CONTROLLOGIX CHASSIS	ROCKWELL	3	1756-A7
2	CONTROLLOGIX, 85-265 VAC POWER SUPPLY (10AMP @5V)	ROCKWELL	3	1756-PA72
3	CONTROLLOGIX 5570 CONTROLLER WITH 32 MBYTES MEMORY	ROCKWELL	2	1756-L74
4	REDUNDANCY MODULE	ROCKWELL	2	1756-RM2
5	ETHERNET DUAL PORT 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS, UP TO 8AXIS), RING AND LINEAR TOPOLOGIES	ROCKWELL	5	1756-EN2TR
6	ETHERNET 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS)	ROCKWELL	2	1756-EN2T
7	DH+/-RIO BRIDGE/SCANNER MODULE	ROCKWELL	1	1756-DHRIO
8	EMPTY SLOT FILLER CARDS	ROCKWELL	8	1756-N2
9	GENERIC ASC II SERIAL COMMUNICATION MODULE	PROSOFT	1	MV156E-GSC
10	10 PORT ETHERNET SWITCH	STRATIX	2	1783-BMS10CL
11	SYNC CABLE	ROCKWELL	1	1756-RMC1
12	LEASED LINE MODEM WITH ETHERNET BRIDGE	MULOGIC	4	LLM-336D.ETH
13	120 VAC TO 24 VDC POWER SUPPLY	ROCKWELL	1	1606-XLE480EP
14	1A CIRCUIT BREAKER	ROCKWELL	3	1492-SP1B010
15	6A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B060
16	2A CIRCUIT BREAKER	ROCKWELL	6	1492-SP1B020
17	10A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B100

BILL OF MATERIAL- MISCELLANEOUS HARDWARE AND SPARE PARTS (SEE NOTE 2)				
ITEM	DESCRIPTION	MANUFACTURER	QUANTITY	CATALOG NUMBER
1	7 SLOT CONTROLLOGIX CHASSIS	ROCKWELL	3	1756-A7
2	CONTROLLOGIX, 85-265 VAC POWER SUPPLY (10AMP @5V)	ROCKWELL	3	1756-PA72
3	CONTROLLOGIX 5575 CONTROLLER WITH 32 MBYTES MEMORY	ROCKWELL	2	1756-L75
4	REDUNDANCY MODULE	ROCKWELL	2	1756-RM2
5	ETHERNET DUAL PORT 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS, UP TO 8AXIS), RING AND LINEAR TOPOLOGIES	ROCKWELL	1	1756-EN2TR
6	ETHERNET 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS)	ROCKWELL	1	1756-EN2T
7	DH+/-RIO BRIDGE/SCANNER MODULE	ROCKWELL	1	1756-DHRIO
8	SYNC CABLE	ROCKWELL	1	1756-RMC1

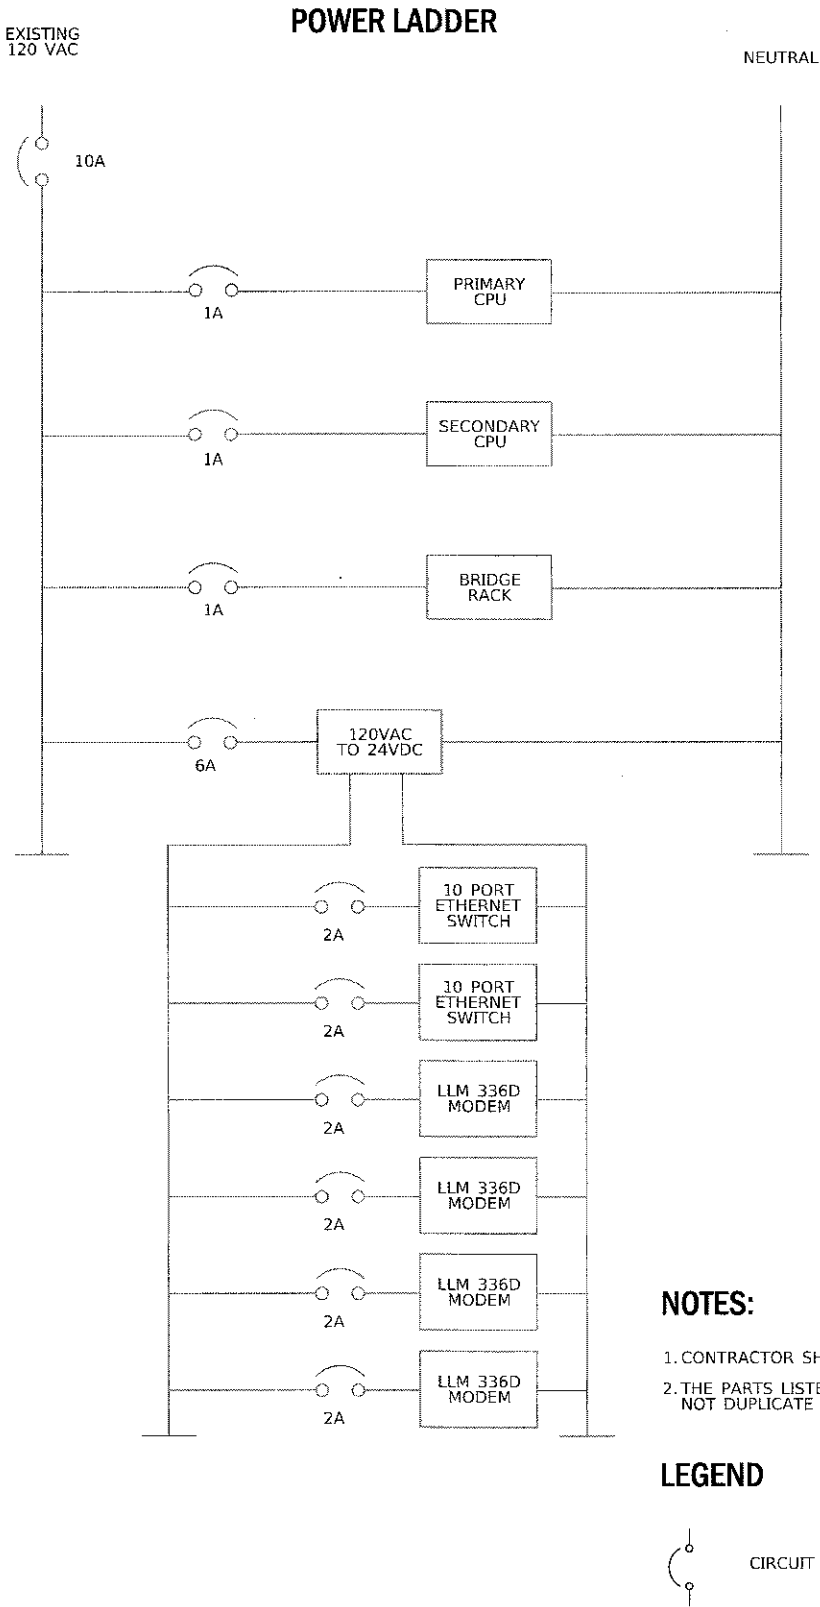

FILE NAME = \$FILES\$ \$MODEL\$ \$MODEL\$	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUILDING A - BILL OF MATERIAL AND POWER LADDER				F.A.I. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - PA	REVISED -						90/94	2017-0181	COOK	36	13
	PLOT SCALE = \$SCALES\$	CHECKED - MBS	REVISED -										
	PLOT DATE = \$DATES\$	DATE - 10/6/2017	REVISED -										
					SCALE: NONE	SHEET 13	OF 36	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		
											CONTRACT NO. 62F40		

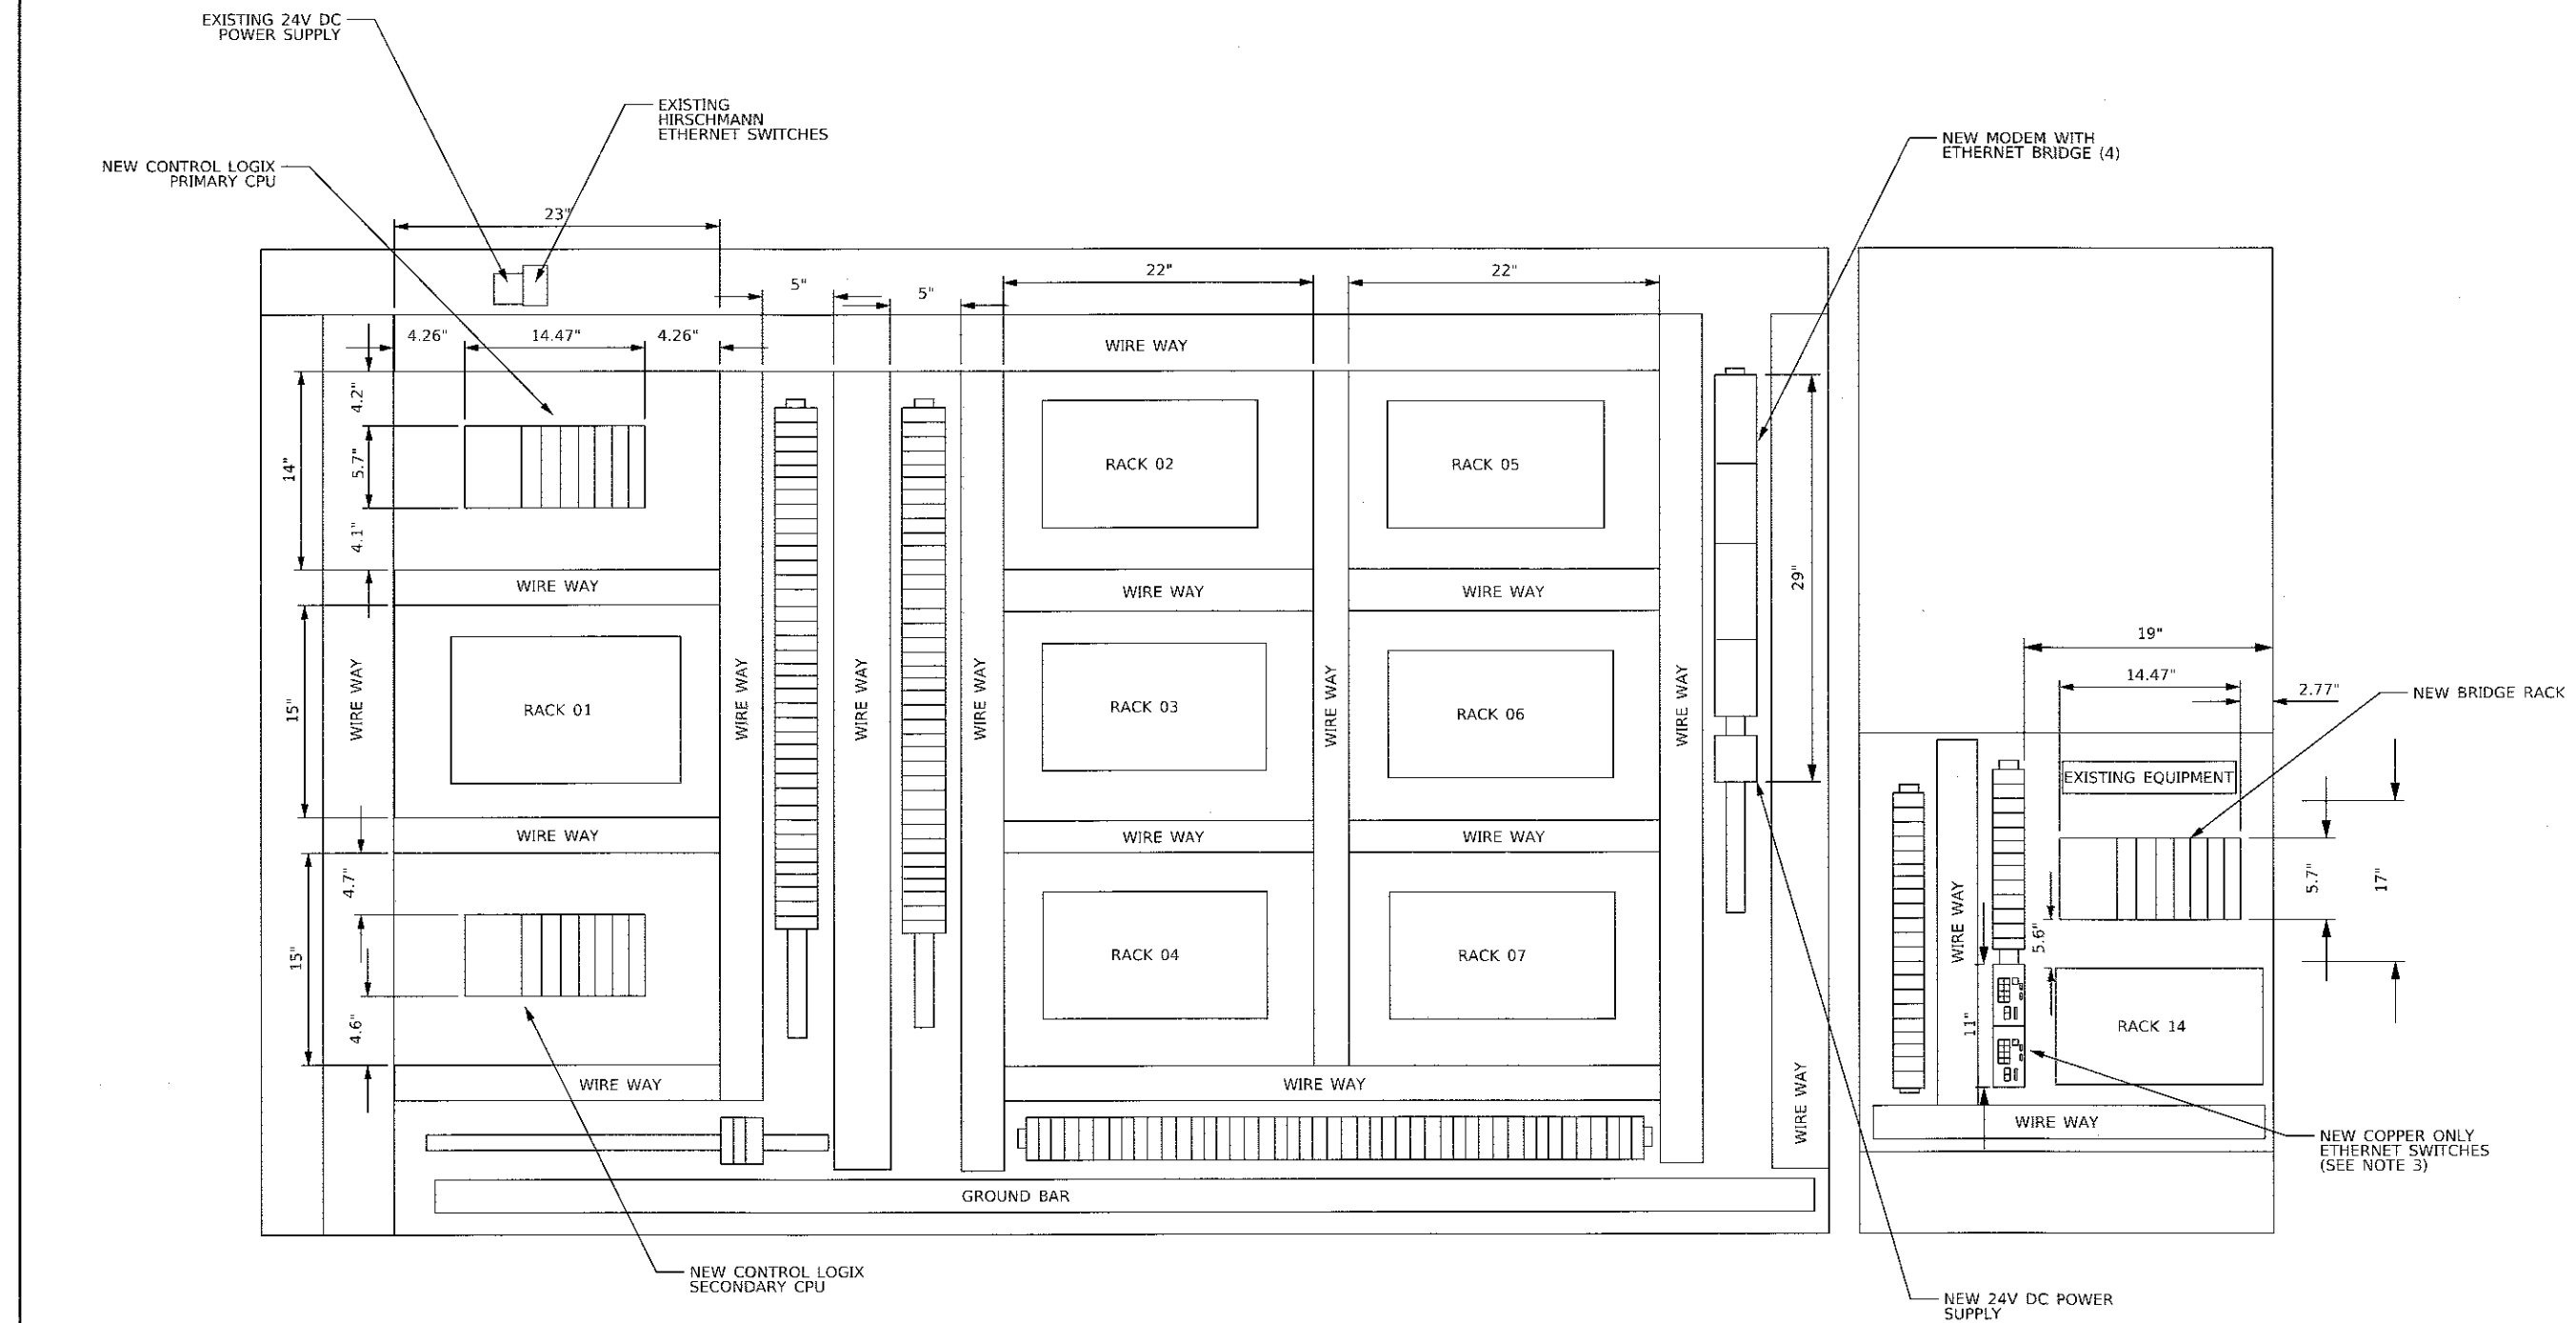


NOTES:

- SEE SHEET 28 FOR SUGGESTED STAGING PLAN FOR REV/LAC PLC CONTROL SYSTEM UPGRADE.
- TEMPORARY 120VAC POWER REQUIRED DURING FIELD TESTING IS OBTAINED FROM A 120VAC POWER RECEPTACLE LOCAL TO THE BUILDING. NO EMERGENCY POWER REQUIRED DURING FIELD TESTING.
- CONTRACTOR SHALL REFERENCE SHEET 16 FOR BILL OF MATERIALS AND POWER LADDER.

FILES	FILE NAME =	USER NAME = \$USER\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUILDING C - NEW PLC/VDI ENCLOSURE MODIFICATIONS				P.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	\$FILE\$\$		DRAWN - PA	REVISED -						90/94	2017-0181	COOK	36	15	
	\$MODEL NAMES	PLOT SCALE = \$SCALE\$	CHECKED - MBS	REVISED -		CONTRACT NO. 62F40									
		PLOT DATE = \$DATES	DATE - 10/6/2017	REVISED -		SCALE: NTS				SHEET 15	OF 36 SHEETS	STA.	TO STA.	ILLINOIS	FED. AID PROJECT

BILL OF MATERIAL - BUILDING C (SEE NOTE 1)				
ITEM	DESCRIPTION	MANUFACTURER	QUANTITY	CATALOG NUMBER
1	7 SLOT CONTROLLOGIX CHASSIS	ROCKWELL	3	1756-A7
2	CONTROLLOGIX, 85-265 VAC POWER SUPPLY (10AMP @5V)	ROCKWELL	3	1756-PA72
3	CONTROLLOGIX 5570 CONTROLLER WITH 32 MBYTES MEMORY	ROCKWELL	2	1756-L74
4	REDUNDANCY MODULE	ROCKWELL	2	1756-RM2
5	ETHERNET DUAL PORT 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS, UP TO 8 AXIS), RING AND LINEAR TOPOLOGIES	ROCKWELL	5	1756-EN2TR
6	ETHERNET 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS)	ROCKWELL	2	1756-EN2T
7	DH+/RIO BRIDGE/SCANNER MODULE	ROCKWELL	1	1756-DHRIO
8	EMPTY SLOT FILLER CARDS	ROCKWELL	8	1756-N2
9	GENERIC ASC II SERIAL COMMUNICATION MODULE	PROSOFT	1	MV156E-GSC
10	10 PORT ETHERNET SWITCH	STRATIX	2	1793-BMS10CL
11	SYNC CABLE	ROCKWELL	1	1756-RMC1
12	LEASED LINE MODEM WITH ETHERNET BRIDGE	MULOGIC	4	LLM-336D.ETH
13	120 VAC TO 24 VDC POWER SUPPLY	ROCKWELL	1	1606-XLE480EP
14	1A CIRCUIT BREAKER	ROCKWELL	3	1492-SP1B010
15	6A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B060
16	2A CIRCUIT BREAKER	ROCKWELL	6	1492-SP1B020
17	10A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B100

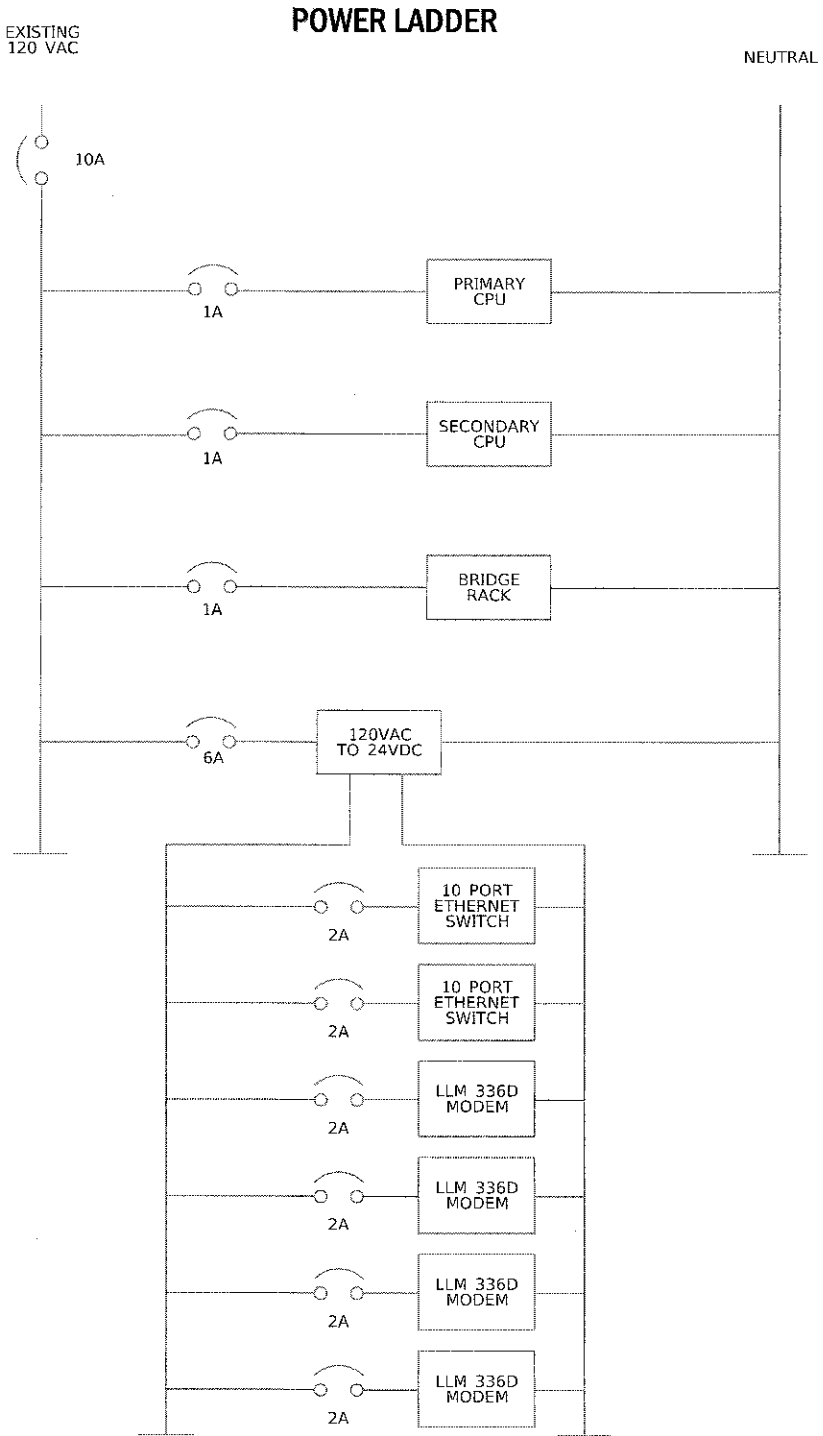


NOTES:

1. CONTRACTOR SHALL VERIFY AND COORDINATE PARTS SHOWN.

LEGEND



FILE NAME = \$FILES\$ \$MODEL\$NAMES	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUILDING C - BILL OF MATERIAL AND POWER LADDER	SCALE: NONE	SHEET 16 OF 36 SHEETS STA.	TO STA.	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - PA	REVISED -						90/94	2017-018I	COOK	36	16
	PLOT SCALE = \$SCALES\$	CHECKED - MBS	REVISED -						CONTRACT NO. 62F40				
	PLOT DATE = \$DATES\$	DATE - 10/6/2017	REVISED -						ILLINOIS FED. AID PROJECT				

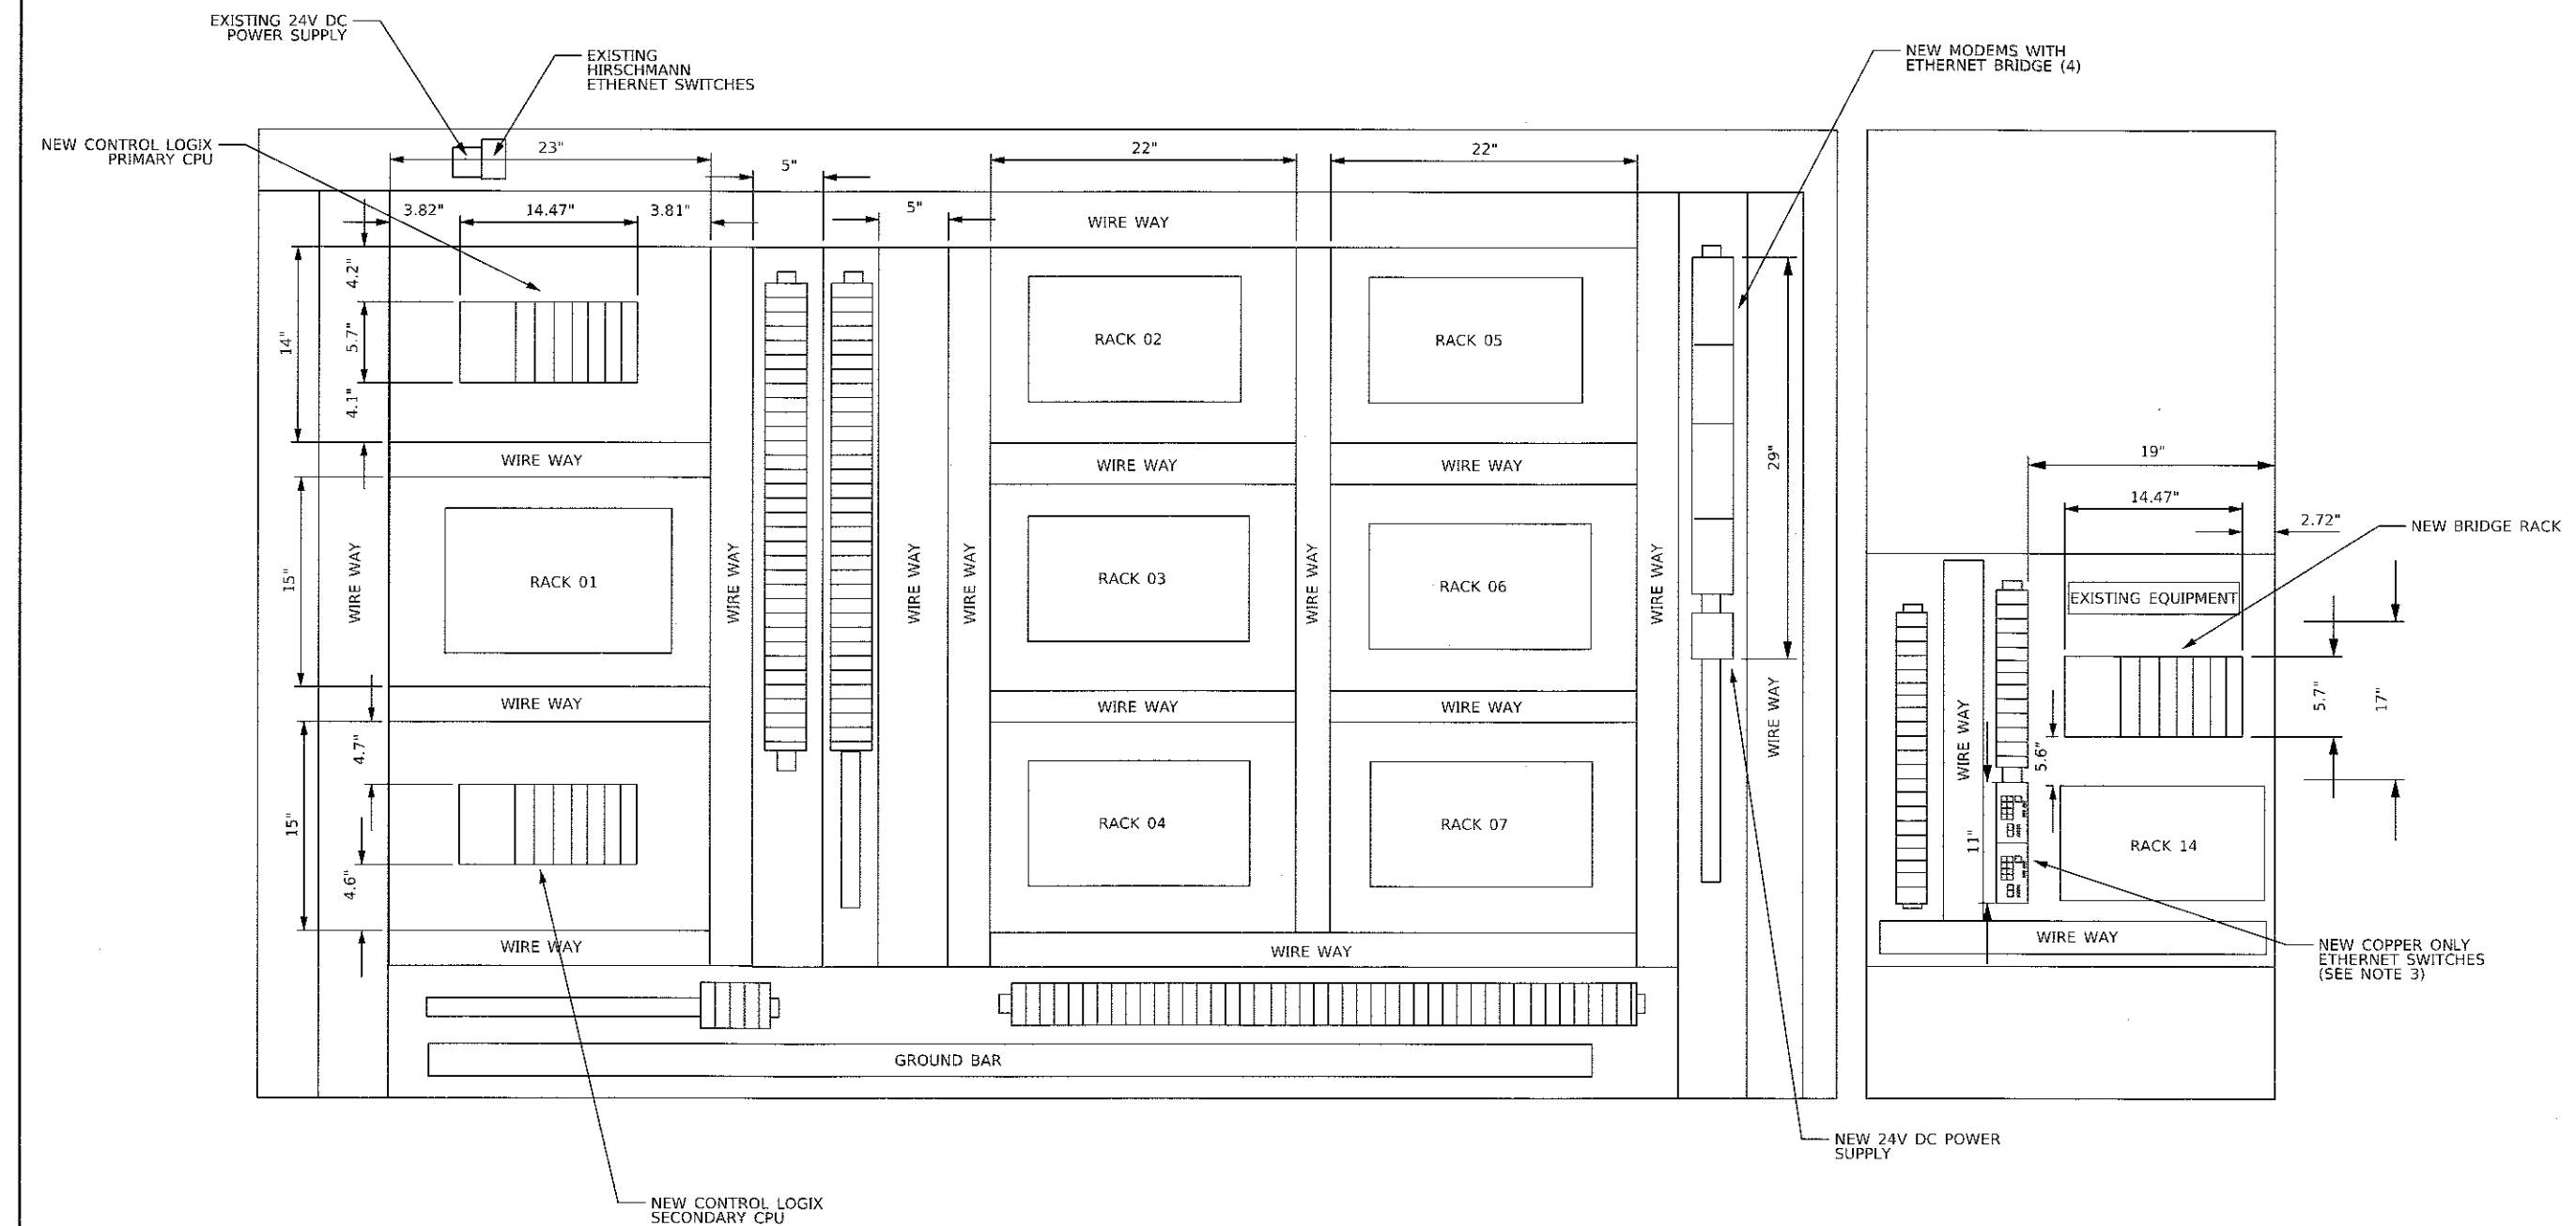


NOTES:

- SEE SHEET 28 FOR SUGGESTED STAGING PLAN FOR REVLCAC PLC CONTROL SYSTEM UPGRADE.
- TEMPORARY 120VAC POWER REQUIRED DURING FIELD TESTING IS OBTAINED FROM A 120VAC POWER RECEPTACLE LOCAL TO THE BUILDING. NO EMERGENCY POWER REQUIRED DURING FIELD TESTING.
- CONTRACTOR SHALL REFERENCE SHEET 19 FOR BILL OF MATERIALS AND POWER LADDER.

FILE NAME =	USER NAME = \$USERS	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION				BUILDING D - NEW PLC/VDI ENCLOSURE MODIFICATIONS				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
\$FILESS		DRAWN - PA	REVISED -									90/94	2017-018I	COOK	36	18
\$MODELNAMES		CHECKED - MBS	REVISED -									CONTRACT NO. 62F40				
		DATE - 10/6/2017	REVISED -									ILLINOIS FED. AID PROJECT				
				SCALE: NTS				SHEET 18 OF 36 SHEETS				STA. TO STA.				

BILL OF MATERIAL - BUILDING D (SEE NOTE 1)				
ITEM	DESCRIPTION	MANUFACTURER	QUANTITY	CATALOG NUMBER
1	7 SLOT CONTROLLOGIX CHASSIS	ROCKWELL	3	1756-A7
2	CONTROLLOGIX, 85-265 VAC POWER SUPPLY (10AMP @5V)	ROCKWELL	3	1756-PA72
3	CONTROLLOGIX 5570 CONTROLLER WITH 32 MBYTES MEMORY	ROCKWELL	2	1756-L74
4	REDUNDANCY MODULE	ROCKWELL	2	1756-RM2
5	ETHERNET DUAL PORT 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS, UP TO 8AXIS), RING AND LINEAR TOPOLOGIES	ROCKWELL	5	1756-EN2TR
6	ETHERNET 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS)	ROCKWELL	2	1756-EN2T
7	DH+/RIO BRIDGE/SCANNER MODULE	ROCKWELL	1	1756-DHRIO
8	EMPTY SLOT FILLER CARDS	ROCKWELL	8	1756-N2
9	GENERIC ASC II SERIAL COMMUNICATION MODULE	PROSOFT	1	MV156E-GSC
10	10 PORT ETHERNET SWITCH	STRATIX	2	1783-BMS10CL
11	SYNC CABLE	ROCKWELL	1	1756-RMC1
12	LEASED LINE MODEM WITH ETHERNET BRIDGE	MULOGIC	4	LLM-336D.ETH
13	120 VAC TO 24 VDC POWER SUPPLY	ROCKWELL	1	1606-XLE480EP
14	1A CIRCUIT BREAKER	ROCKWELL	3	1492-SP1B010
15	6A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B060
16	2A CIRCUIT BREAKER	ROCKWELL	6	1492-SP1B020
17	10A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B100

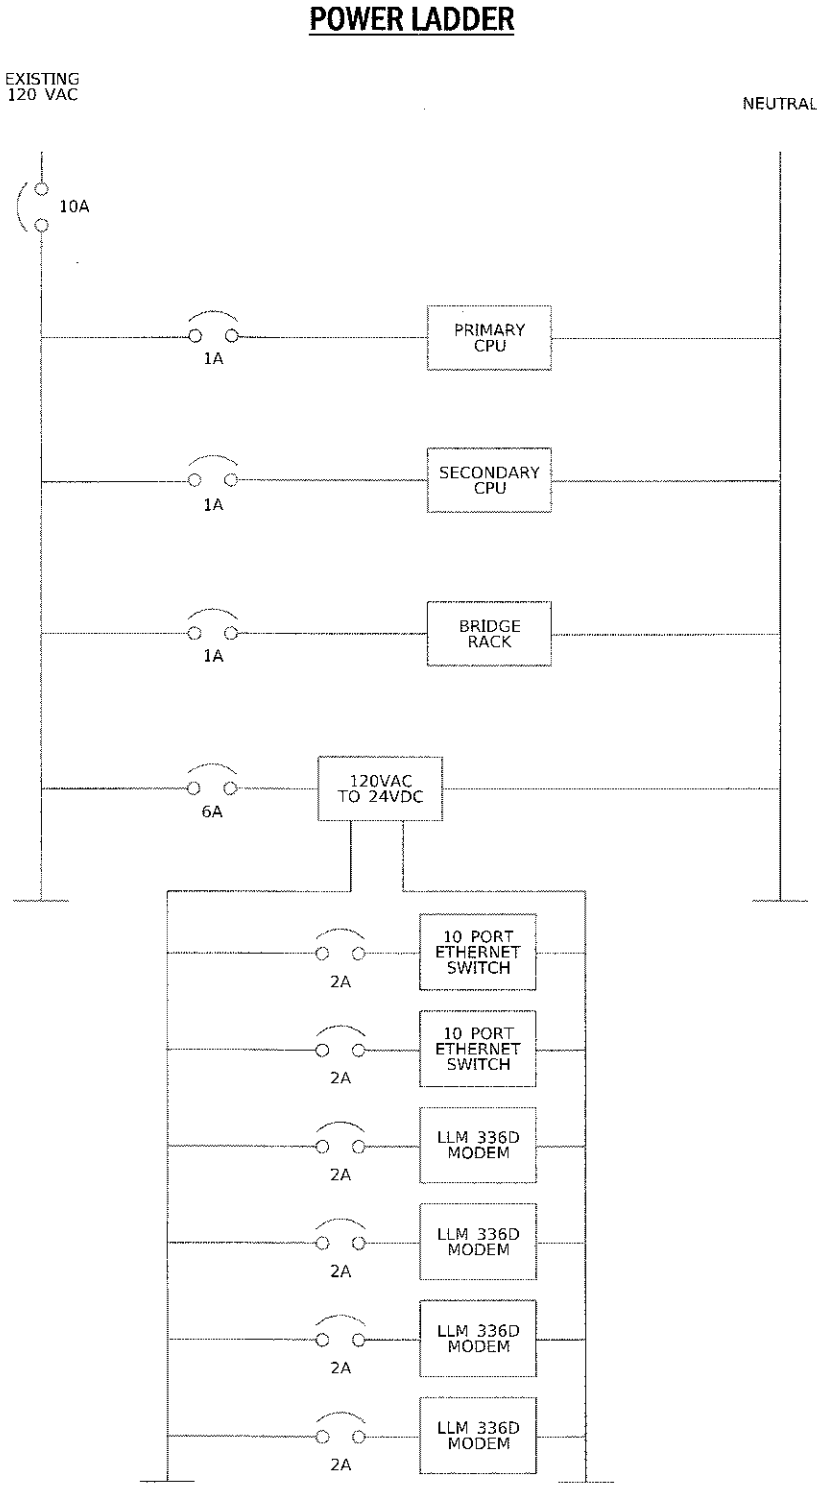


NOTES:

1. CONTRACTOR SHALL VERIFY AND COORDINATE PARTS SHOWN.

LEGEND



DETAILS	FILE NAME =	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUILDING D - BILL OF MATERIAL AND POWER LADDER				F.A.I. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	\$FILES\$		DRAWN - PA	REVISED -						90/94	2017-018I	COOK	36	19
		PLOT SCALE = \$SCALES\$	CHECKED - MBS	REVISED -		CONTRACT NO. 62F40								
	\$MODELNAME\$	PLOT DATE = \$DATES\$	DATE - 10/6/2017	REVISED -		SCALE: NONE	SHEET 19	OF 36	SHEETS	STA.	TO STA.			
ILLINOIS FED. AID PROJECT														

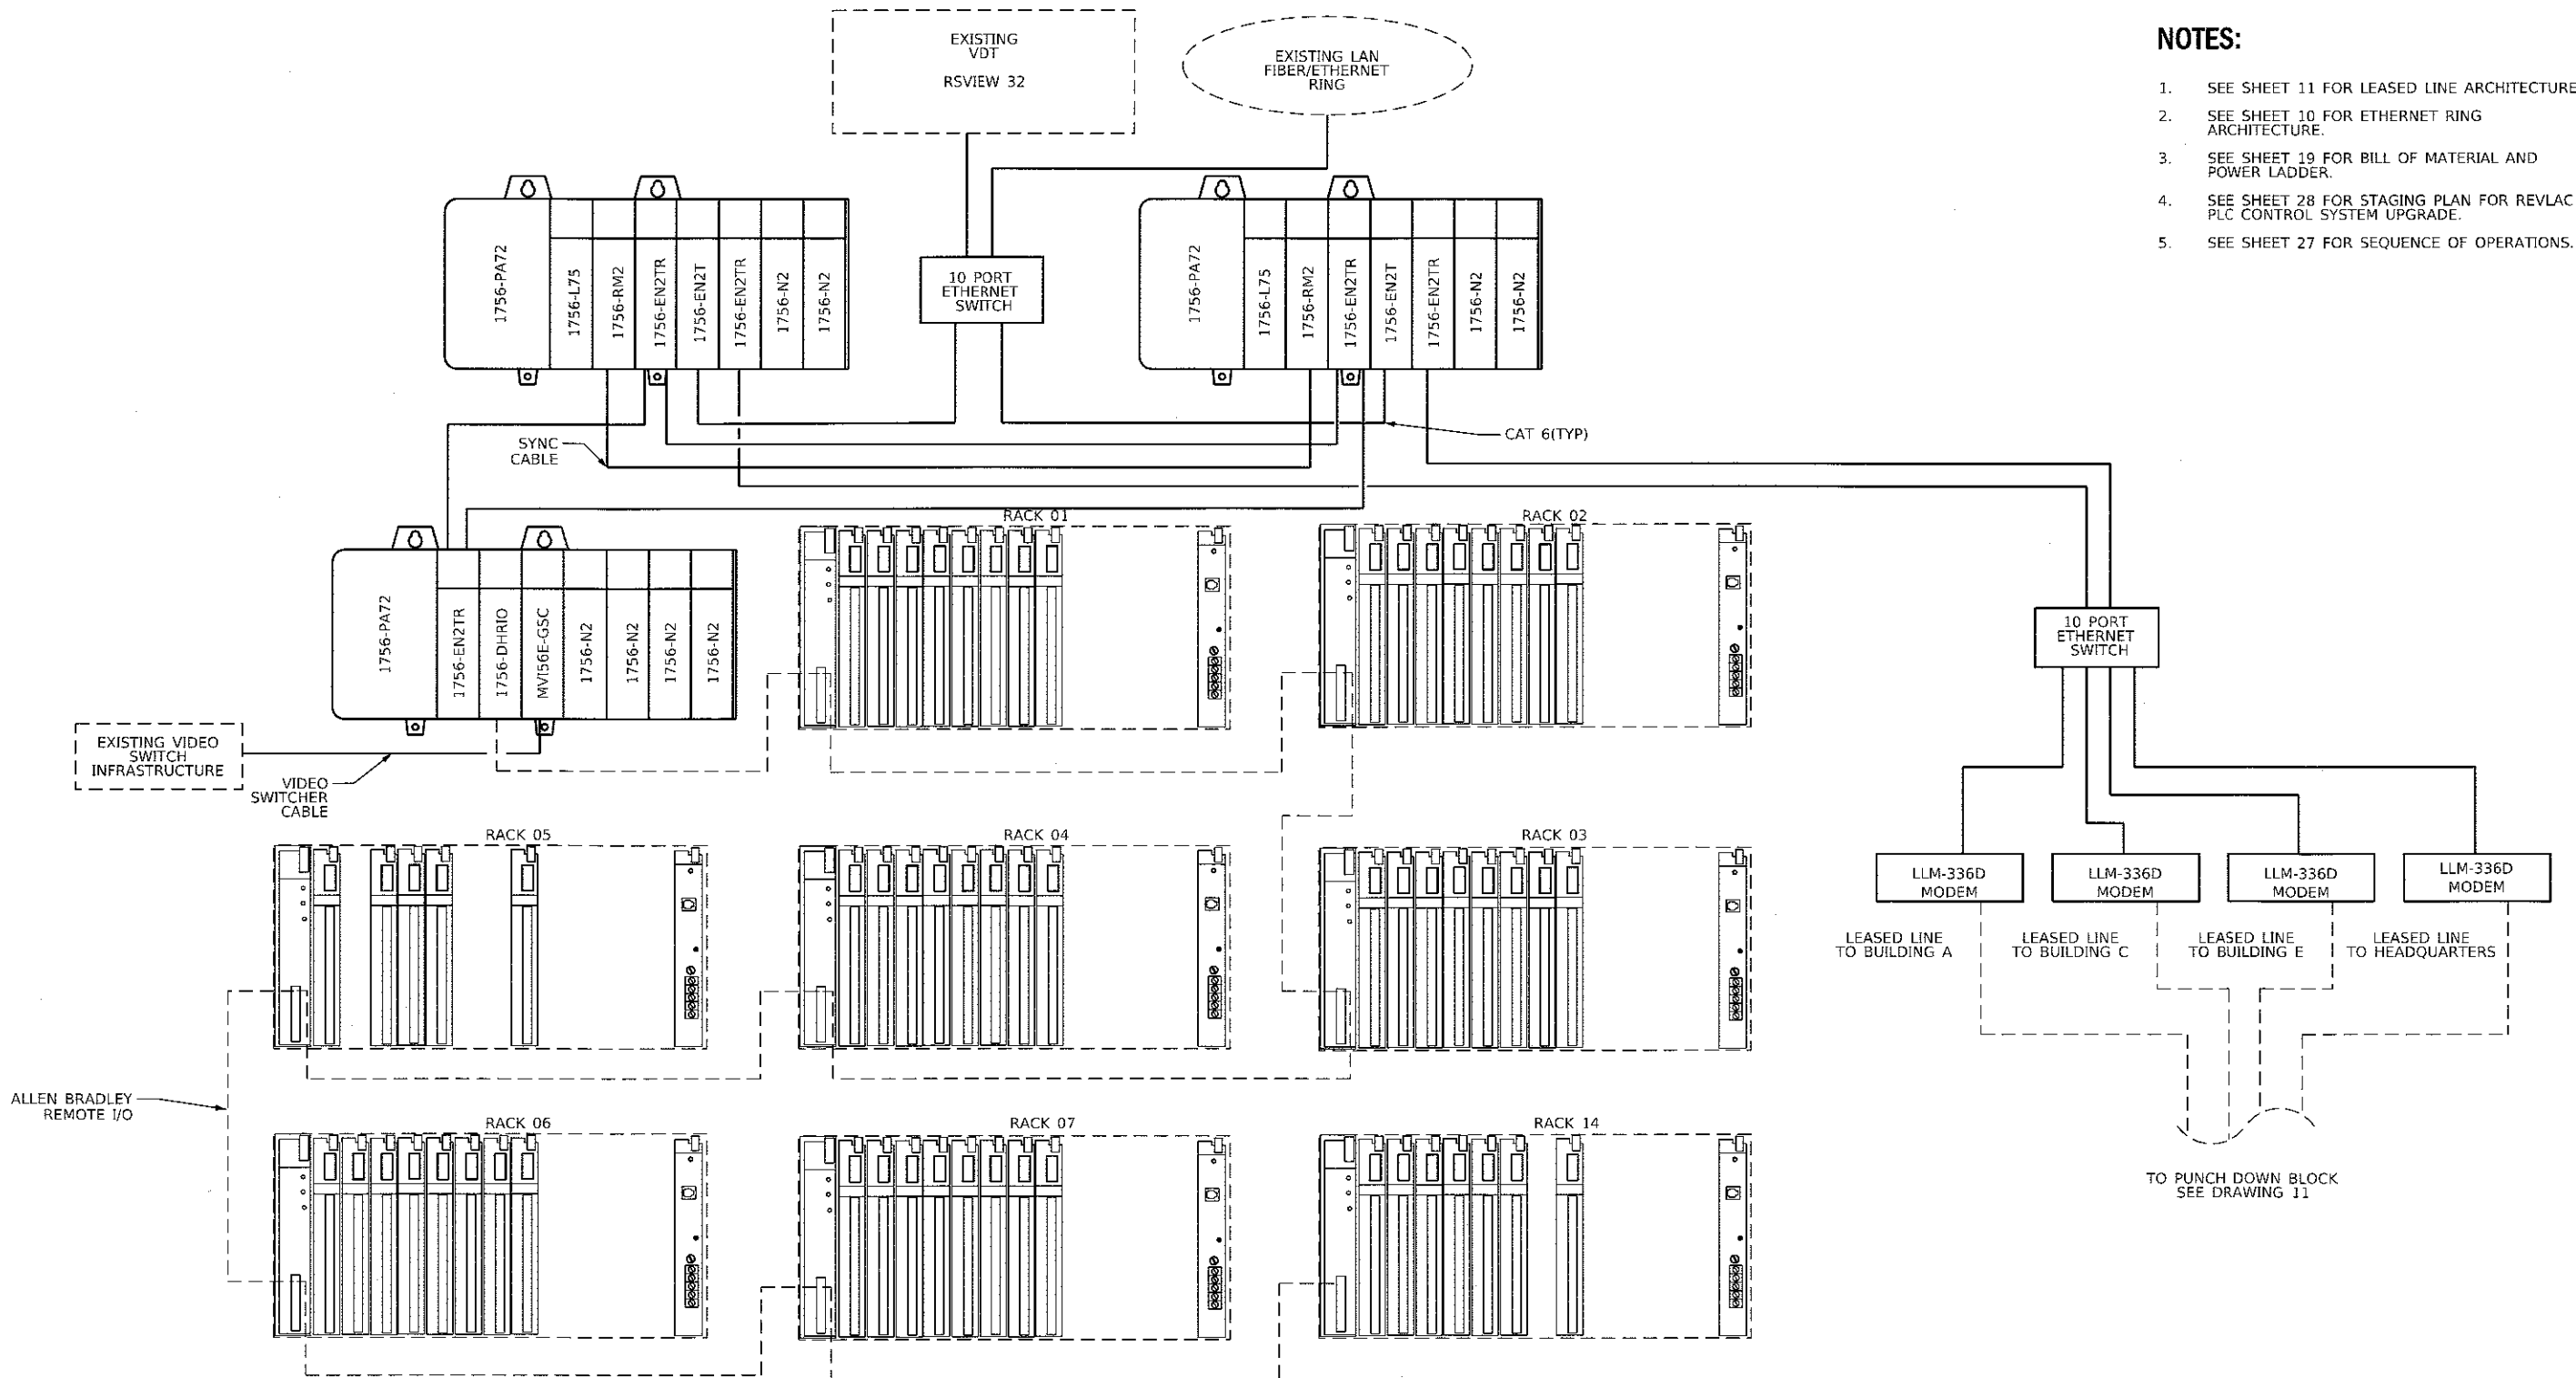

NOTES:


- SEE SHEET 11 FOR LEASED LINE ARCHITECTURE
- SEE SHEET 10 FOR ETHERNET RING ARCHITECTURE.
- SEE SHEET 19 FOR BILL OF MATERIAL AND POWER LADDER.
- SEE SHEET 28 FOR STAGING PLAN FOR REVLAC PLC CONTROL SYSTEM UPGRADE.
- SEE SHEET 27 FOR SEQUENCE OF OPERATIONS.

LEGEND

- NEW CABLES & EQUIPMENT IN PLC/VDT ENCLOSURE
- EXISTING CABLES
- EXISTING RACK AND EQUIPMENT

FILE NAME =	USER NAME = \$USERS	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION				BUILDING D - NEW PLC/VDT NETWORK ARCHITECTURE				P.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FILES		DRAWN - PA	REVISED -									90/94	2017-0181	COOK	36	20
\$MODEL\$	PLOT SCALE = \$SCALE\$	CHECKED - MBS	REVISED -													
	PLOT DATE = \$DATE\$	DATE - 10/6/2017	REVISED -													CONTRACT NO. 62F40
				SCALE: NTS				SHEET 20 OF 36 SHEETS STA. TO STA.				ILLINOIS FED. AID PROJECT				

BILL OF MATERIAL - BUILDING E (SEE NOTE 1)				
ITEM	DESCRIPTION	MANUFACTURER	QUANTITY	CATALOG NUMBER
1	7 SLOT CONTROLLOGIX CHASSIS	ROCKWELL	3	1756-A7
2	CONTROLLOGIX, 85-285 VAC POWER SUPPLY (10AMP @5V)	ROCKWELL	3	1756-PA72
3	CONTROLLOGIX 5570 CONTROLLER WITH 32 MBYTES MEMORY	ROCKWELL	2	1756-L74
4	REDUNDANCY MODULE	ROCKWELL	2	1756-RM2
5	ETHERNET DUAL PORT 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS, UP TO 8AXIS), RING AND LINEAR TOPOLOGIES	ROCKWELL	5	1756-EN2TR
6	ETHERNET 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS)	ROCKWELL	2	1756-EN2T
7	DH4A-RIO BRIDGE/SCANNER MODULE	ROCKWELL	1	1756-DHRIO
8	EMPTY SLOT FILLER CARDS	ROCKWELL	8	1756-N2
9	GENERIC ASC II SERIAL COMMUNICATION MODULE	PROSOFT	1	MV158E-GSC
10	10 PORT ETHERNET SWITCH	STRATIX	2	1783-BMS10CL
11	SYNC CABLE	ROCKWELL	1	1756-RMC1
12	LEASED LINE MODEM WITH ETHERNET BRIDGE	MULOGIC	4	LLM-336D.ETH
13	120 VAC TO 24 VDC POWER SUPPLY	ROCKWELL	1	1606-XLE480EP
14	1A CIRCUIT BREAKER	ROCKWELL	3	1492-SP1B010
15	6A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B060
16	2A CIRCUIT BREAKER	ROCKWELL	6	1492-SP1B020
17	10A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B100

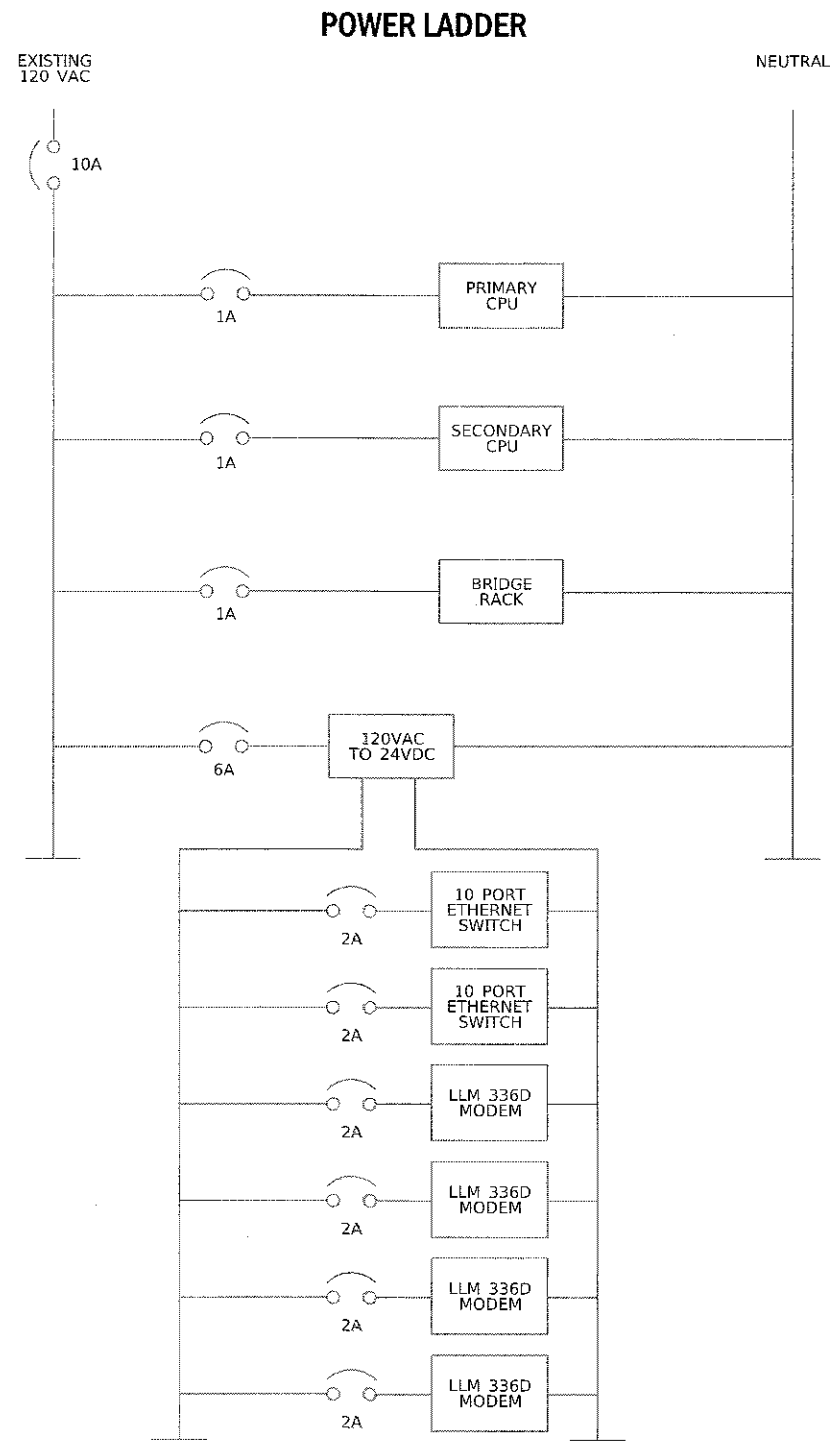


NOTES:
1. CONTRACTOR SHALL VERIFY AND COORDINATE PARTS SHOWN.


LEGEND



DETAILS	FILENAME =	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUILDING E - BILL OF MATERIAL AND POWER LADDER					F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	\$FILES\$		DRAWN - PA	REVISED -		90/94	2017-0181	COOK	36	22					
		PLOT SCALE = \$SCALES\$	CHECKED - MBS	REVISED -		CONTRACT NO. 62F40									
	\$MODELNAME\$	PLOT DATE = \$DATES\$	DATE - 10/6/2017	REVISED -		ILLINOIS FED. AID PROJECT									
SCALE: NONE						SHEET 22	OF 36	SHEETS	STA.	TO STA.					

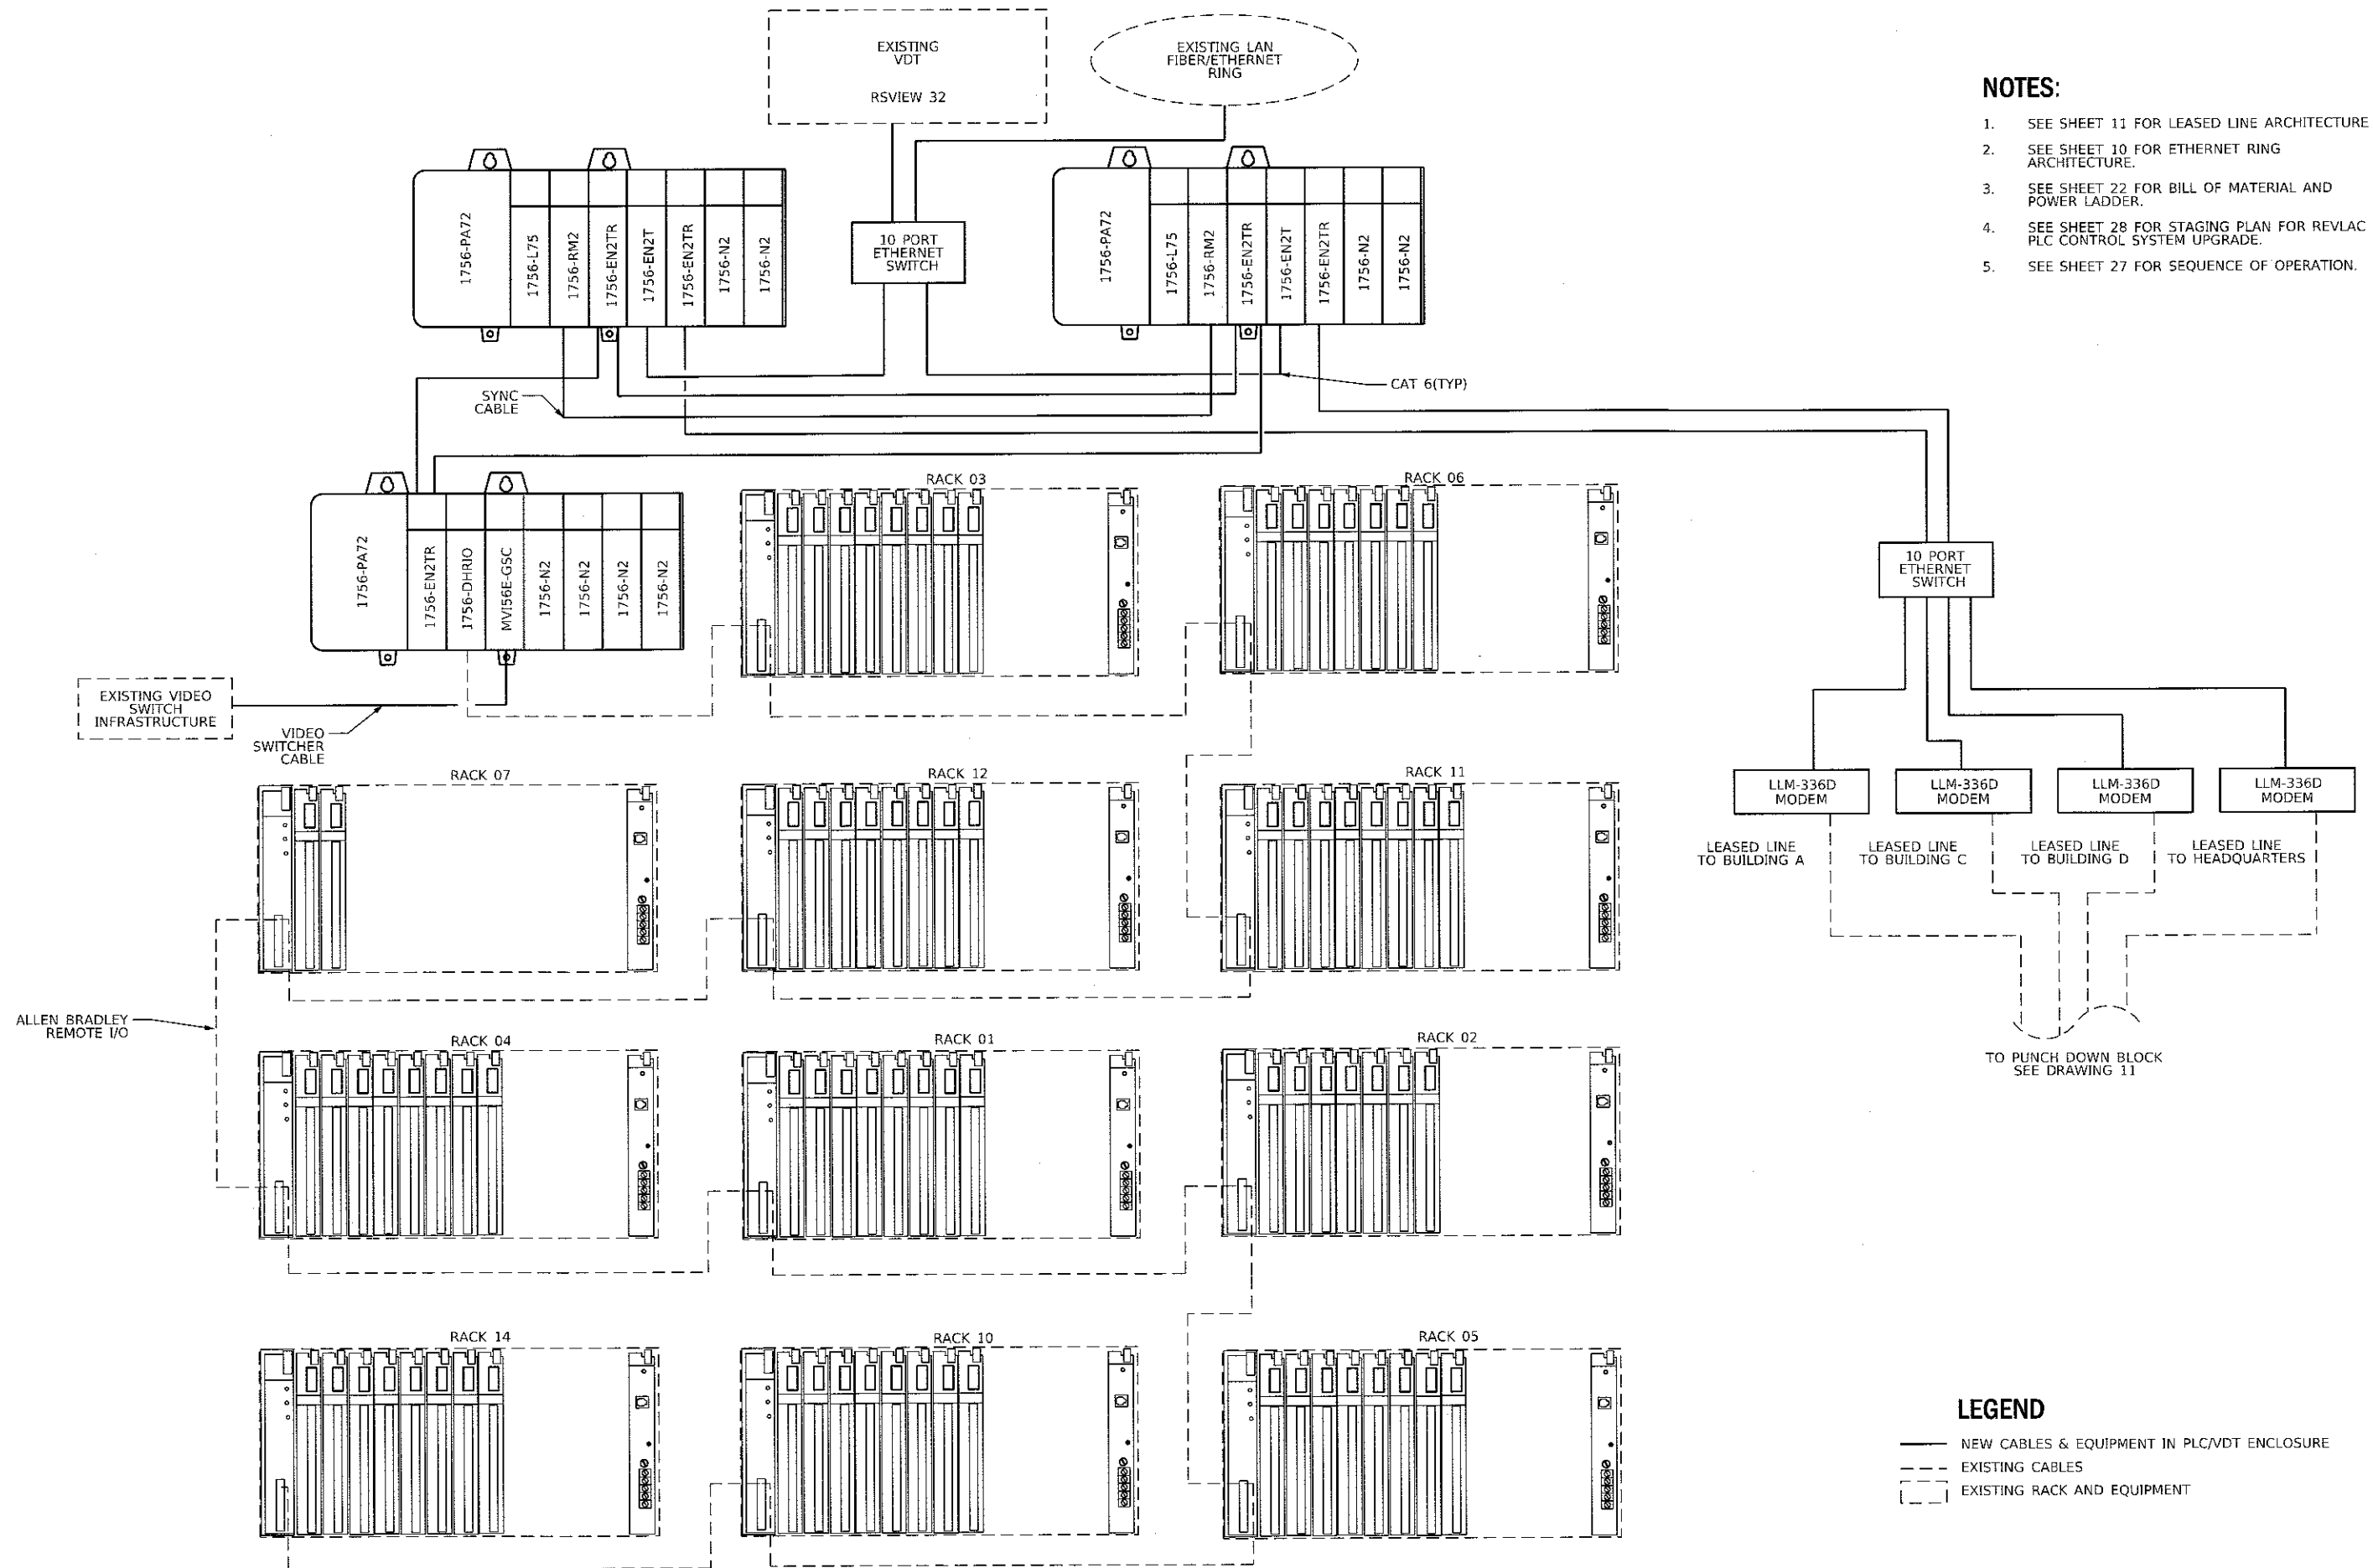

FILES	FILE NAME =	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUILDING E - NEW PLC/VDT NETWORK ARCHITECTURE					P.A.L. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	\$FILES\$		DRAWN - PA	REVISED -							90/94	2017-0181	COOK	36	23
											CONTRACT NO. 62F40				
	\$MODEL\$NAMES	PLOT SCALE = \$SCALES\$	CHECKED - MBS	REVISED -		SCALE: NTS		SHEET 23	OF 36	SHEETS	STA.	TO STA.			
		PLOT DATE = \$DATES\$	DATE - 10/6/2017	REVISED -		ILLINOIS FED. AID PROJECT									

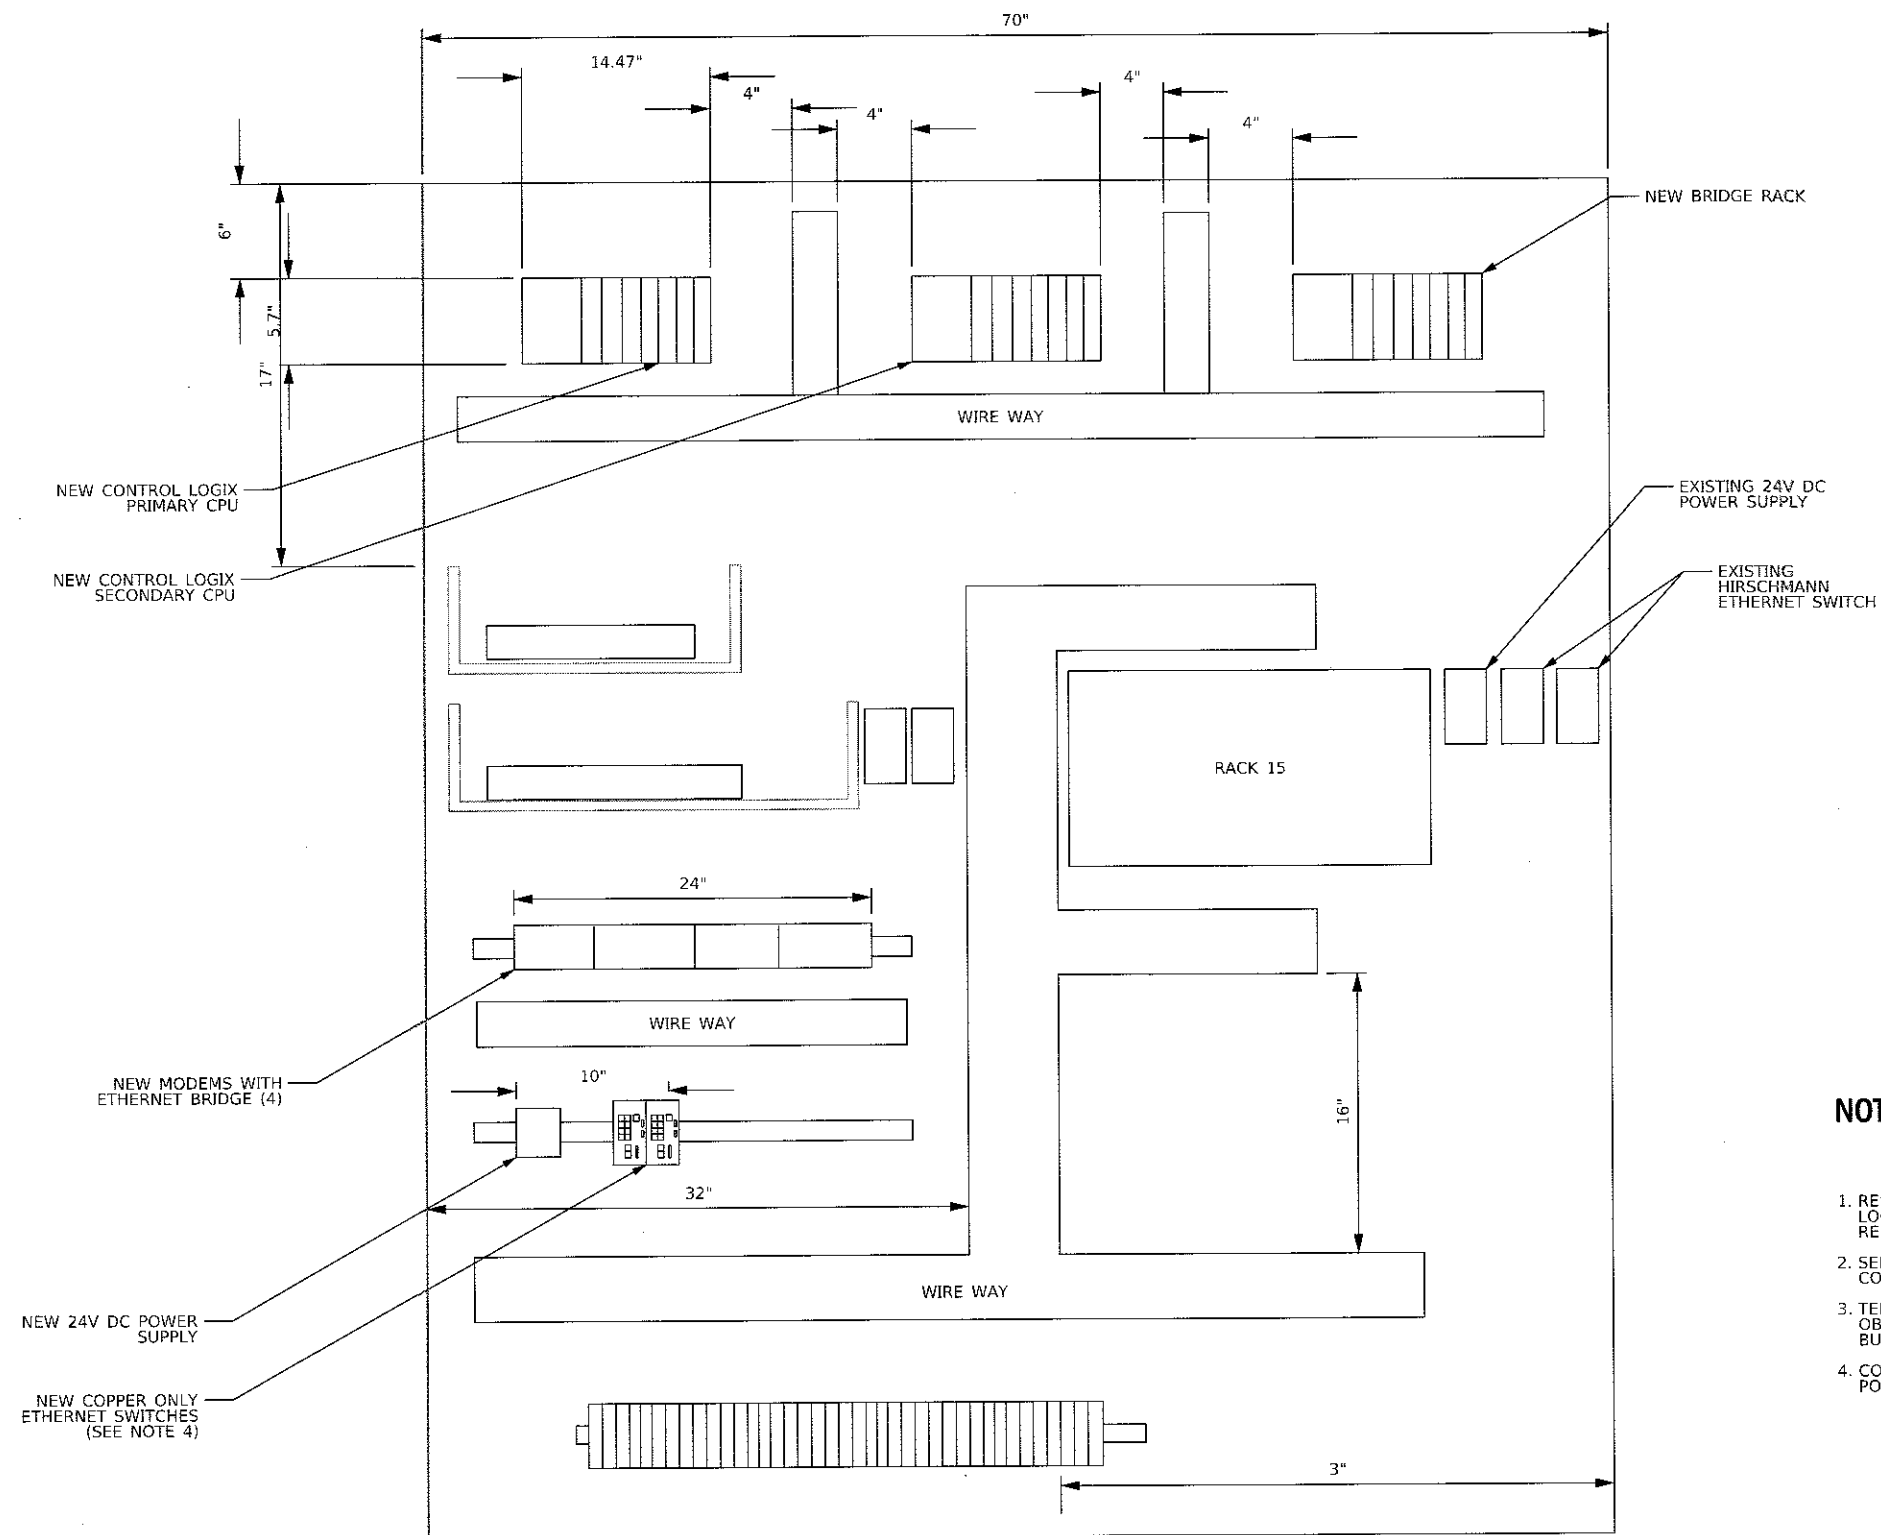


NOTES:

1. REMOTE I/O RACK 12 IS NOT SHOWN FOR CLARITY. THIS RACK IS LOCATED ON THE BOTTOM OF THE CABINET AND WILL NOT BE REMOVED.
2. SEE SHEET 28 FOR SUGGESTED STAGING PLAN FOR REV/LAC PLC CONTROL SYSTEM UPGRADE.
3. TEMPORARY 120VAC POWER REQUIRED DURING FIELD TESTING IS OBTAINED FROM A 120VAC POWER RECEPTACLE LOCAL TO THE BUILDING. NO EMERGENCY POWER REQUIRED DURING FIELD TESTING.
4. CONTRACTOR SHALL REFERENCE SHEET 25 BILL OF MATERIALS AND POWER LADDER.

FILE#	FILE NAME =	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	HEADQUARTERS BUILDING - NEW PLC/VDT ENCLOSURE MODIFICATIONS				P.A.L. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	\$FILE\$\$		DRAWN - PA	REVISED -		90/94	2017-0181	COOK	36	24				
		PLOT SCALE = \$SCALE\$	CHECKED - MBS	REVISED -		CONTRACT NO. 62F40								
		PLOT DATE = \$DATE\$	DATE - 10/6/2017	REVISED -		ILLINOIS FED. AID PROJECT								
	\$MODEL\$NAMES					SCALE: NTS	SHEET 24	OF 36	SHEETS	STA.	TO STA.			


BILL OF MATERIAL - H.Q. (SEE NOTE 1)				
ITEM	DESCRIPTION	MANUFACTURER	QUANTITY	CATALOG NUMBER
1	7 SLOT CONTROLLOGIX CHASSIS	ROCKWELL	3	1756-A7
2	CONTROLLOGIX, 85-265 VAC POWER SUPPLY (10AMP @5V)	ROCKWELL	3	1756-PA72
3	CONTROLLOGIX 5570 CONTROLLER WITH 32 MBYTES MEMORY	ROCKWELL	2	1756-L74
4	REDUNDANCY MODULE	ROCKWELL	2	1756-RM2
5	ETHERNET DUAL PORT 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS, UP TO 8AXIS), RING AND LINEAR TOPOLOGIES	ROCKWELL	5	1756-EN2TR
6	ETHERNET 10-100M INTERFACE MODULE (SUPPORTS 128 TCP/IP CONNECTIONS)	ROCKWELL	2	1756-EN2T
7	DH+/RIO BRIDGE/SCANNER MODULE	ROCKWELL	1	1756-DHRIO
8	EMPTY SLOT FILLER CARDS	ROCKWELL	8	1756-N2
9	GENERIC ASC II SERIAL COMMUNICATION MODULE	PROSOFT	1	MV156E-GSC
10	10 PORT ETHERNET SWITCH	STRATIX	2	1783-BMS10CL
11	SYNC CABLE	ROCKWELL	1	1756-RMC1
12	LEASED LINE MODEM WITH ETHERNET BRIDGE	MULOGIC	4	LLM-336D.ETH
13	120 VAC TO 24 VDC POWER SUPPLY	ROCKWELL	1	1606-XLE480EP
14	1A CIRCUIT BREAKER	ROCKWELL	3	1492-SP1B010
15	6A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B060
16	2A CIRCUIT BREAKER	ROCKWELL	6	1492-SP1B020
17	10A CIRCUIT BREAKER	ROCKWELL	1	1492-SP1B100

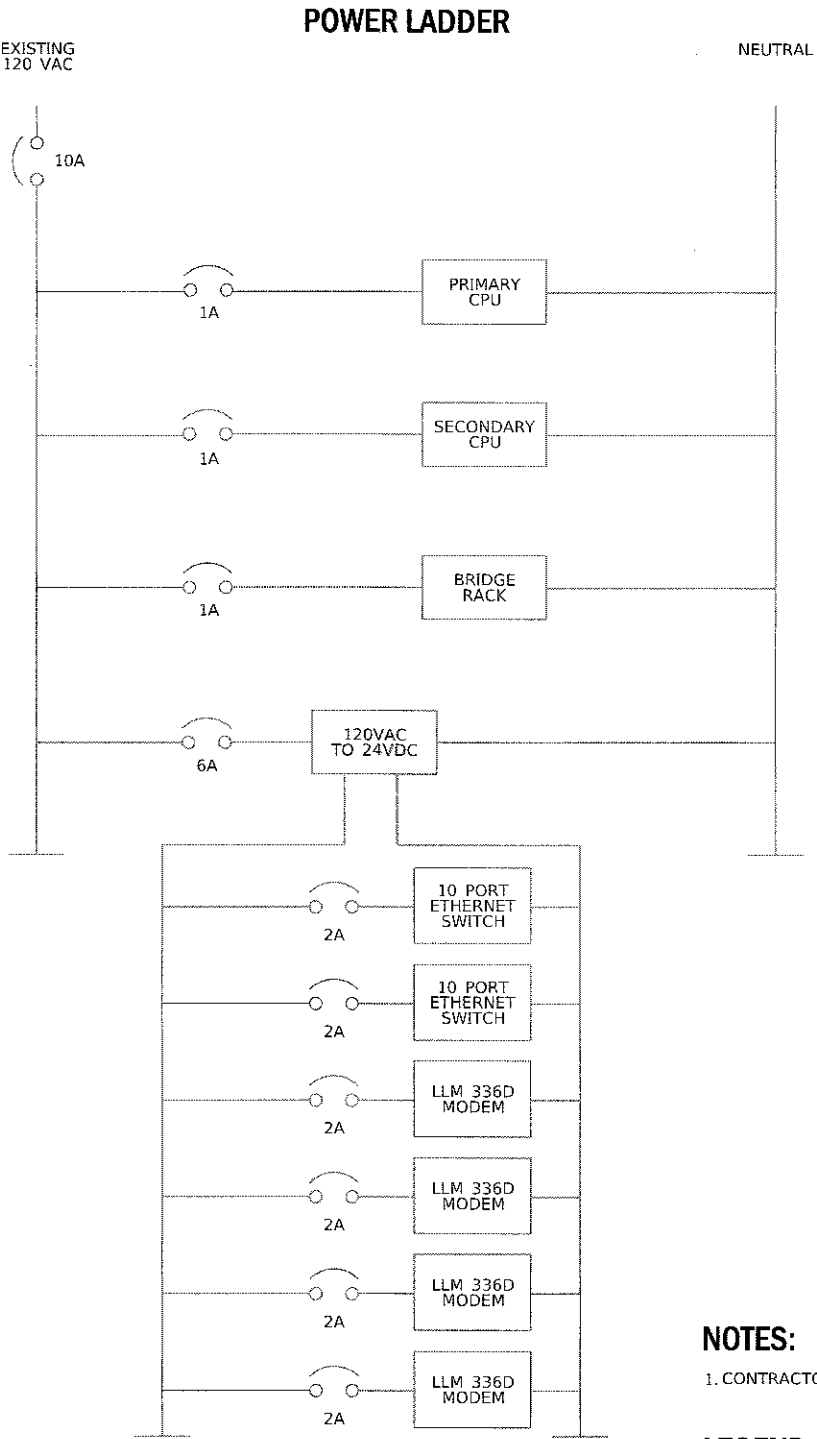

NOTES:

1. CONTRACTOR SHALL VERIFY AND COORDINATE PARTS SHOWN.

FILE NAME = \$FILES\$ \$MODEL\$NAMES	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	HEADQUARTERS BUILDING - BILL OF MATERIAL AND POWER LADDER				F.A.I. RTE. 90/94	SECTION 2017-0181	COUNTY COOK	TOTAL SHEETS 36	SHEET NO. 25	
		DRAWN - PA	REVISED -											
	PLOT SCALE = \$SCALES\$	CHECKED - MBA	REVISED -											
	PLOT DATE = \$DATES\$	DATE - 10/6/2017	REVISED -											
SCALE: NONE					SHEET 25	OF 36	SHEETS	STA.	TO STA.	CONTRACT NO. 62F40				
											ILLINOIS	FED. AID PROJECT		

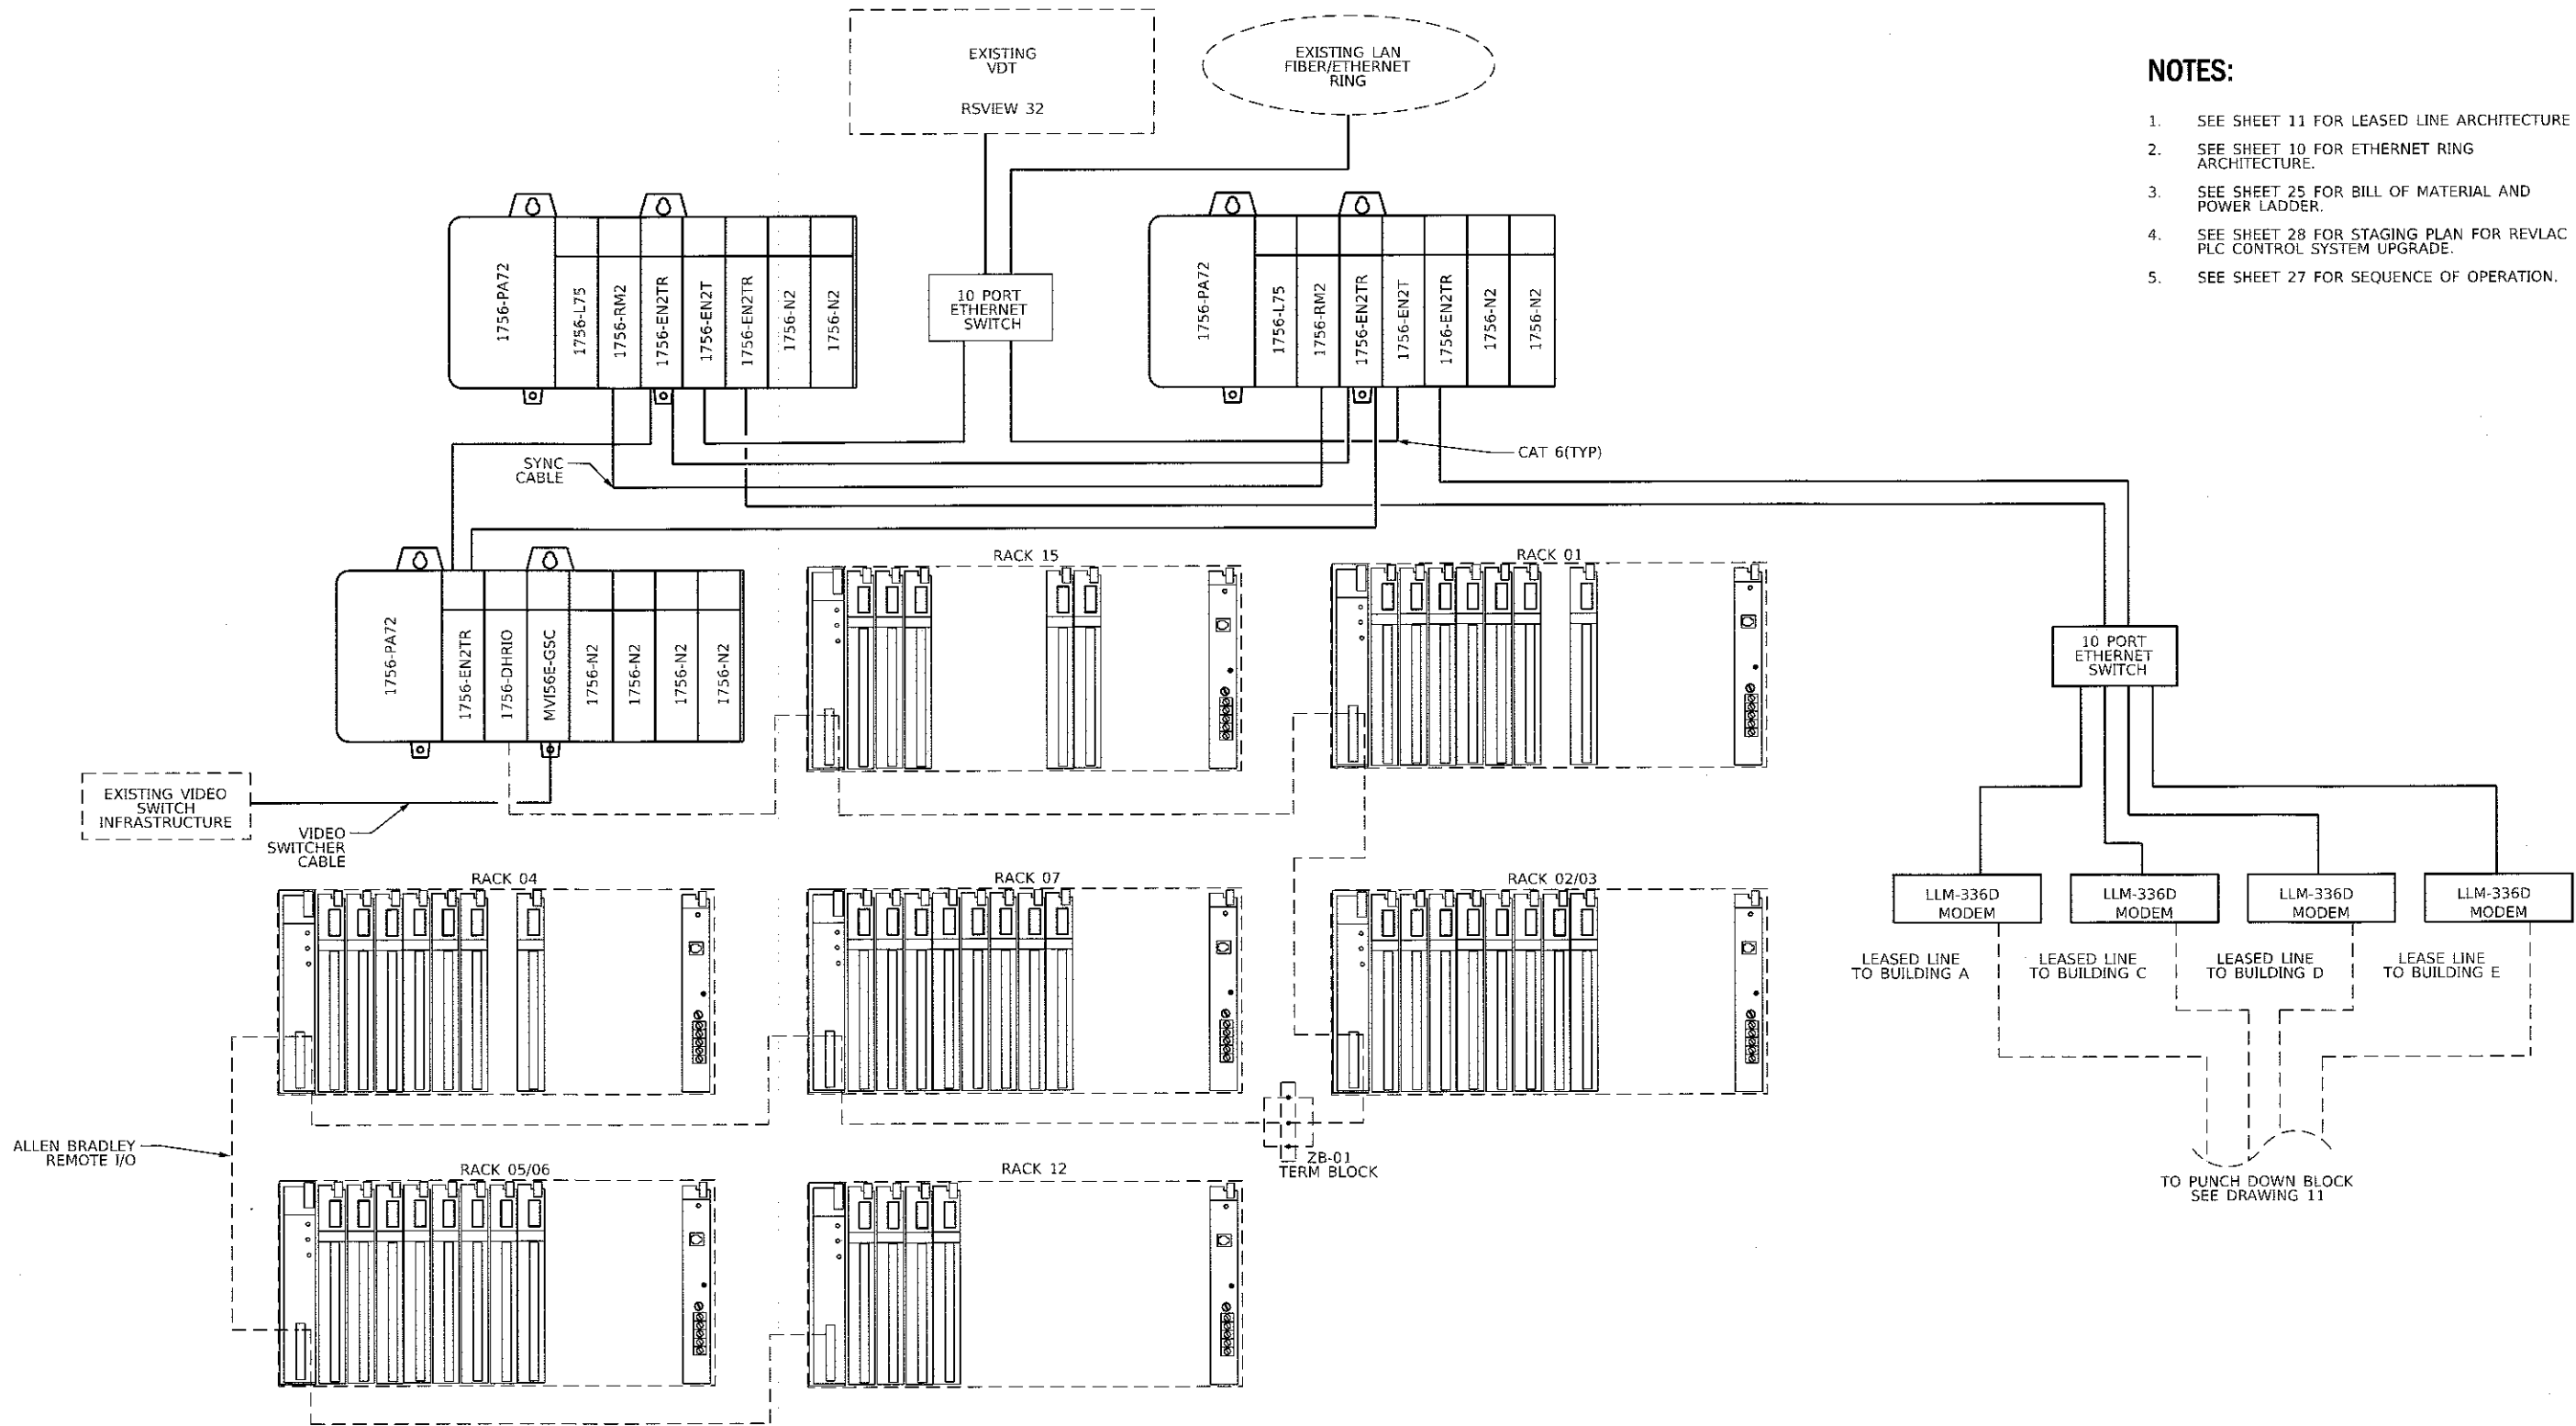

NOTES:

1. SEE SHEET 11 FOR LEASED LINE ARCHITECTURE
2. SEE SHEET 10 FOR ETHERNET RING ARCHITECTURE.
3. SEE SHEET 25 FOR BILL OF MATERIAL AND POWER LADDER.
4. SEE SHEET 28 FOR STAGING PLAN FOR REVLA PLC CONTROL SYSTEM UPGRADE.
5. SEE SHEET 27 FOR SEQUENCE OF OPERATION.

LEGEND

- NEW CABLES & EQUIPMENT IN PLC/VDI ENCLOSURE
- - - EXISTING CABLES
- [] EXISTING RACK AND EQUIPMENT

FILE NAME = \$FILES\$ SMODELNAMES	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	HEADQUARTERS BUILDING - NEW PLC/VDT NETWORK ARCHITECTURE				P.A.L. RTE 90/94	SECTION 2017-0181	COUNTY COOK	TOTAL SHEETS 36	SHEET NO. 26				
	PLOT SCALE = \$SCALES\$	DRAWN - PA	REVISED -														
	PLOT DATE = \$DATES\$	CHECKED - MBS	REVISED -														
	DATE - 10/6/2017	REVISED -															
					SCALE: NTS	SHEET 26	OF 36	SHEETS	STA.	TO STA.							
														ILLINOIS FED. AID PROJECT			
														CONTRACT NO. 62F40			

SUGGESTED PHASING PLAN OF REVLAC PLC/HMI CONTROL SYSTEM

(I) PREREQUISITES FOR PHASED UPGRADE OF THE REVLAC PLC-5 SYSTEM:

1. THE CONTRACTOR SHALL SUBMIT A COMPREHENSIVE PHASING PLAN (FOR THE PHASED UPGRADE OF THE REVLAC PLC CONTROL SYSTEM) INCLUDING A DETAILED PROJECT SCHEDULE FOR APPROVAL BY THE ENGINEER PRIOR TO PERFORMING ANY UPGRADE OF THE REVLAC PLC CONTROL SYSTEM.
2. THE CONTRACTOR SHALL PROVIDE A FORMAL RAMP CLOSURE REQUEST TO THE DEPARTMENT ONE WEEK PRIOR TO FIELD WORK INCLUDING REMOVAL/INSTALLATION OF EQUIPMENT AND THE INDIVIDUAL BUILDING/INTEGRATED FIELD TEST. THE RAMP CLOSURE REQUEST WILL DETAIL THE SCOPE OF WORK BEING UNDERTAKEN BY THE CONTRACTOR, ALONG WITH POTENTIAL OPERATIONAL IMPACT/RISKS ON THE REVLAC CONTROL SYSTEM DURING THE RAMP CLOSURE AND STEPS TAKEN BY THE CONTRACTOR TO MITIGATE POTENTIAL OPERATIONAL IMPACT/RISKS.

(II) REVLAC PLC CONTROL SYSTEM UPGRADE PHASING PLAN:

1. CONTRACTOR SHALL PROCURE THE HARDWARE LISTED IN THE CONTRACT DOCUMENTS NEEDED FOR THE UPGRADE OF THE FIVE BUILDING PLCS. THIS HARDWARE SHALL THEN BE SHIPPED BY THE CONTRACTOR TO ESP FOR CONFIGURATION AND PROGRAMMING.
2. ESP SHALL ENSURE THE CONTROL LOGIX HARDWARE (PROCESSOR RACKS AND BRIDGE RACK) IS LOADED WITH COMPATIBLE REDUNDANCY BUNDLE FIRMWARE AT THE SHOP FOR BUILDINGS A, C, D, E AND HQ.
3. ESP SHALL SUBMIT DETAILED TESTING PROCEDURES FOR APPROVAL TO THE ENGINEER PRIOR TO ALL PHASES OF TESTING LISTED BELOW.
4. ESP SHALL PROVIDE NO LESS THAN SIX WEEKS ADVANCE NOTIFICATION FOR ALL PHASES OF TESTING AND SHALL CONFIRM THE TEST DATE NO LESS THAN 14 DAYS PRIOR TO THE TEST DATE. ESP SHALL VERIFY WITH THE DEPARTMENT IF THE DEPARTMENT OR THEIR REPRESENTATIVE WILL WITNESS THE TEST PHASES OR IF ESP SHALL PROVIDE CERTIFIED TEST RESULTS TO THE ENGINEER FOR APPROVAL.

(III) SHOP TEST

A. INDIVIDUAL BUILDING SHOP TEST: (AT ESP FACILITY)

1. THE PROGRAMMING EFFORT FOR THIS TEST SHALL INCLUDE CODE FOR A SIMULATOR TO PROVIDE FEEDBACK FROM THE ROADWAY DEVICES TO BE USED DURING SHOP TESTING. ONCE THE CONFIGURATION AND PROGRAMMING IS COMPLETE, ESP WILL TEST EACH BUILDING PLC PROGRAMMING SEQUENCE ON AN INDIVIDUAL BASIS AT ESP FACILITIES.
2. AT THE SUCCESSFUL CONCLUSION OF THE INDIVIDUAL BUILDING SHOP TESTS AND TEST RESULTS HAVE BEEN APPROVED BY THE ENGINEER, ESP SHALL SHIP THE CONTROL LOGIX HARDWARE AND THE SIMULATOR TO THE CONTRACTOR FOR THE INTEGRATED SHOP TEST.

B. INTEGRATED SHOP TEST: (AT CONTRACTOR FACILITY)

1. THE CONTRACTOR SHALL HOST AND PROVIDE ALL NECESSARY SUPPORT TO ESP FOR THE INTEGRATED SHOP TEST. THIS INCLUDES PROVIDING SPACE, NECCESARY TEMPORARY EQUIPMENT/POWER FOR THE TEST, AND ADEQUATE OFF STREET PARKING.
2. ESP SHALL PERFORM A DOCUMENTED INTEGRATED SHOP TEST WITH THE CONTROL LOGIX HARDWARE AND SIMULATE THE NEW PROGRAMMING SEQUENCE WITH THE RSVIEW VDT APPLICATION (WITH UPDATED DRIVER, TAGS, ALARMING AND SCREENS) FOR BUILDINGS A, C, D, E AND HQ AS DETAILED IN THE SPECIFICATIONS. THIS TEST SHALL INCLUDE SIMULATION OF THE PROGRAMMING SEQUENCE FOR THE NEW BUILDING (A, C, D, E AND HQ) PLC WITH LOCAL REMOTE I/O, AND ALL THE INTER PROCESSOR COMMUNICATION BETWEEN THE BUILDING PLCS OVER THE ETHERNET NETWORK.
3. ALL REVLAC CONTROL SYSTEM FUNCTIONS SHALL BE DEMONSTRATED IN THIS TEST. RAMP DEVICES SHALL BE SIMULATED AND FAILURE MODES TESTED. THIS PHASE OF TESTING SHALL DEMONSTRATE THE LOGGING OF ALARMS, FAILURES, AND EVENTS BY THE PLCS ON THE VARIOUS CONTROL, DISPLAY, AND TERMINAL DEVICES. COMMANDS SHALL BE SIMULATED FROM THE SYSTEM CONTROL PANELS, THE ROADSIDE CONTROL PANELS, THE SWITCHES AND PUSH BUTTONS ON THE PLC ENCLOSURES AND THE CATTRON CONTROLLER. THE COMMANDS SENT SHALL INCLUDE NORMAL RAMP TRANSITIONS AND ABNORMAL RAMP / DEVICE TRANSITIONS.
4. AT THE SUCCESSFUL COMPLETION OF THE INTEGRATED SHOP TEST AND AFTER TEST RESULT DOCUMENTS HAVE BEEN APPROVED BY THE ENGINEER, THE CONTRACTOR SHALL SHIP THE HARDWARE TO EACH SITE. THE CONTRACTOR SHALL INSTALL THE HARDWARE IN A TEMPORARY MANNER AS DESCRIBED BELOW.

(IV) FIELD TEST

A. INDIVIDUAL BUILDING FIELD TEST (BUILDING A):

(NOTE, STEPS 1-6 SHALL BE REPEATED FOR BUILDINGS C, D, E AND HQ BY THE CONTRACTOR, ONE BUILDING AT A TIME)

1. THE CONTRACTOR SHALL MOUNT THE PLC HARDWARE IN A TEMPORARY LOCATION CONSISTING OF THE NEW CONTROL LOGIX RACKS, BRIDGE RACK, 10 PORT ETHERNET SWITCH AND AN ENGINEERING WORK STATION WITH BUILDING A RSVIEW 32 VDT APPLICATION PROGRAM (UPDATED DRIVER TAGS, ALARMING AND SCREENS) IN FRONT OF THE EXISTING PLC/VDT ENCLOSURE IN BUILDING A. A TEMPORARY SOURCE OF 120VAC POWER IN BUILDING A SHALL USED TO PROVIDE POWER TO THE TEST BENCH EQUIPMENT.
2. ESP SHALL ISOLATE BUILDING A FROM THE REVLAC CONTROL SYSTEM BY POWERING DOWN THE EXISTING PLC-5 PRIMARY RACK, SECONDARY RACK, DB-MODULE IN THE REMOTE I/O RACK, MODEM RACK, THE BLACK BOX MODEMS AND DEACTIVATE THE EXISTING RSVIEW 32 APPLICATION IN THE BUILDING A PLC/VDT ENCLOSURE. A REMOTE I/O BLUE CABLE CONNECTION SHALL BE MADE BETWEEN TEST BENCH BRIDGE RACK AND THE EXISTING REMOTE I/O IN THE PLC/VDT ENCLOSURE. THE NECESSARY TEST BENCH ETHERNET CONNECTIONS ARE MADE BETWEEN THE CONTROL LOGIX PROCESSOR RACKS, BRIDGE RACKS AND THE RSVIEW 32 VDT WORKSTATION THROUGH THE 10 PORT ETHERNET SWITCH.
3. THE TEST BENCH EQUIPMENT SHALL BE POWERED UP AND ESP SHALL TEST THE PLC SEQUENCE AND VDT APPLICATION FOR BUILDING A. ONLY THE PLC SEQUENCE RELATED TO LOCAL REMOTE I/O IN BUILDING A SHALL BE TESTED. TESTING OF THE INTER-PLC COMMUNICATION BETWEEN THE BUILDINGS ACROSS THE FIBER/ETHERNET OR LEASED LINE MODEM NETWORK WILL NOT BE DONE AT THIS TIME. COMMUNICATION NETWORK DIAGNOSTICS SCREENS/ALARMS PORTION OF THE BUILDING A VDT AND REMOTE ACCESS TO OTHER BUILDING VDT'S WILL ALSO NOT BE TESTED AT THIS TIME.
4. THE BUILDING A PLC SEQUENCE SHALL BE FULLY TESTED FROM FOUR LOCATIONS:
 - a. THE SYSTEM CONTROL PANEL LOCATED IN THE BUILDING
 - b. THE CATTRON UNIT
 - c. THE SELECTOR SWITCHES AND PUSH BUTTONS ON THE FRONT OF THE PLC / VDT ENCLOSURE
 - d. THE SELECTOR SWITCHES LOCATED IN EQUIPMENT INSTALLED ON THE ROADWAY
5. ESP SHALL RESTORE THE BUILDING A PLC-5 AND THE EXISTING VDT SYSTEM TO ITS ORIGINAL STATE AT THE END OF EACH DAY OF THIS PHASE OF TESTING.
6. AT THE SUCCESSFUL COMPLETION OF THE INDIVIDUAL BUILDING FIELD TESTS AND AFTER TEST RESULT DOCUMENTS HAVE BEEN APPROVED BY THE ENGINEER, THE CONTRACTOR SHALL BEGIN THE INTEGRATED FIELD TESTS.

B. INTEGRATED FIELD TEST (COMPLETE REVLAC CONTROL SYSTEM COMMISSIONING):


1. THE CONTRACTOR SHALL POWER DOWN THE EXISTING PLC-5 PRIMARY, SECONDARY RACKS, DB-MODULE IN THE REMOTE I/O RACK, MODEM RACK THE BLACK BOX MODEMS FOR EACH BUILDING. A REMOTE I/O BLUE CABLE CONNECTION SHALL BE MADE BETWEEN THE NEW BRIDGE RACK AND THE EXISTING REMOTE I/O IN THE PLC/VDT ENCLOSURE IN EACH BUILDING. THE NECESSARY ETHERNET CONNECTIONS SHALL BE MADE BETWEEN THE CONTROL LOGIX PROCESSOR RACKS, BRIDGE RACKS AND THE RSVIEW 32 VDT WORKSTATION THROUGH THE 10 PORT ETHERNET SWITCH. APPROPRIATE ETHERNET CONNECTIONS SHALL BE MADE BETWEEN THE EQUIPMENT AND THE FIBER/ETHERNET LEASED LINE MODEM INFRASTRUCTURE. THE EXISTING RSVIEW 32 VDT APPLICATION PROGRAM SHALL BE DEACTIVATED FROM THE VDT COMPUTER IN EACH BUILDING PLC/VDT ENCLOSURE. THE RSVIEW 32 VDT APPLICATION PROGRAM (UPDATED DRIVER TAGS, ALARMING AND SCREENS) SHALL BE LOADED ONTO THE VDT COMPUTER IN EACH BUILDING PLC/VDT ENCLOSURE. THE UPDATED RSVIEW 32 APPLICATION PROGRAM SHALL THEN BE ACTIVATED IN EACH BUILDING (INCLUDING REMOTE ACCESS CAPABILITY ACROSS BUILDING VDT USING VNC SOFTWARE). ANY INTERFACE BETWEEN THE VIDEO SWITCH INFRASTRUCTURE AND THE TEST BENCH IN EACH BUILDING MUST BE MADE BY THE CONTRACTOR. ALL FIVE BUILDINGS SHALL BE DONE SIMULTANEOUSLY IN ORDER TO MAXIMIZE THE TIME AVAILABLE FOR TESTING.
2. THE NEW EQUIPMENT SHALL BE POWERED UP AND A COMPREHENSIVE INTEGRATED FIELD TEST OF THE CONTROL LOGIX BASED REVLAC CONTROL SYSTEM SHALL BE PERFORMED BY ESP IN ACCORDANCE WITH THE APPROVED TEST PLANS.
3. ESP SHALL RESTORE THE PLC-5 AND THE EXISTING VDT SYSTEM (FOR EACH BUILDING) TO ITS ORIGINAL STATE AT THE END OF EACH DAY FOR THIS PHASE OF THE TEST. ALL FIVE BUILDINGS SHALL BE DONE SIMULTANEOUSLY IN ORDER TO MAXIMIZE THE TIME AVAILABLE FOR TESTING.
4. AT THE SUCCESSFUL COMPLETION OF THE INDIVIDUAL BUILDING FIELD TESTS AND AFTER TEST RESULT DOCUMENTS HAVE BEEN APPROVED BY THE ENGINEER, THE CONTRACTOR SHALL BEGIN THE INTEGRATED FIELD TESTS.

(V) SIXTY DAY OBSERVATION PERIOD:

1. AT THE SUCCESSFUL CONCLUSION OF THE INTERGRATED FIELD TEST, A SIXTY DAY OBSERVATION PERIOD WILL BEGIN. THE FIRST THIRTY DAYS OF THIS PERIOD, THE NEW CONTROL LOGIX RACKS AND BRIDGE RACKS SHALL REMAIN INSTALLED IN THEIR TEMPORARY LOCATION. THE CONTRACTOR SHALL CONNECT THE NEW CONTROL LOGIX PLCS AS DESCRIBED IN STEP 1 OF THE INTEGRATED FIELD TEST.
2. UPON SUCCESSFUL OPERATION OF THE REVLAC CONTROL SYSTEM OF THIS INITIAL PERIOD OF THIRTY DAYS WITH THE NEW CONTROL LOGIX PLC HARDWARE/PROGRAMMING SEQUENCES,THE CONTRACTOR SHALL PERFORM REMOVAL OF THE PLC-5 INFRASTRUCTURES IN EACH OF THE BUILDING PLC/VDT ENCLOSURES SIMULTANEOUSLY IN ACCORDANCE WITH SHEETS 5, 6, 7, 8 AND 9. THE BUILDING ENCLOSURES SHALL BE DE-ENERGIZED DURING THE REMOVAL PHASE.
3. THE CONTROL LOGIX EQUIPMENT, ETHERNET SWITCHES AND THE ETHERNET BASED MODEMS SHALL BE INSTALLED IN EACH OF THE BUILDING PLC/VDT ENCLOSURES IN ACCORDANCE WITH THE POWER LADDER SHEETS 13, 16, 19, 22 AND 25. ALSO INSTALLATION SHALL BE PERFORMED TO COMPLY WITH NEW BUILDING PLC/VDT ENCLOSURE SHEETS 12, 15, 18, 21 AND 24. THE BUILDING ENCLOSURES SHALL BE DE-ENERGIZED DURING THE INSTALLATION PHASE.
4. THE RSVIEW 32 VDT APPLICATION PROGRAM (UPDATED DRIVER TAGS, ALARMING AND SCREENS) SHALL BE LOADED AND ACTIVATED ON THE VDT COMPUTER IN EACH BUILDING PLC/VDT ENCLOSURE (INTEGRATED FIELD TEST APPROVED VERSION OF THE APPLICATION PROGRAM).
5. THE CONTRACTOR SHALL MAKE APPROPRIATE NETWORK CONNECTIONS/ CONFIGURATION IN ACCORDANCE WITH SHEETS 10, 11, 14, 17, 20, 23 AND 26.
6. ALL BUILDING PLC/HMI ENCLOSURES SHALL BE POWERED UP WITH UPDATED CONTROL LOGIX PLC HARDWARE AND INTEGRATED FIELD TEST APPROVED PLC SEQUENCES AND RSVIEW 32 VDT APPLICATION PROGRAM. REMOVAL OF EXISTING EQUIPMENT AND INSTALLATION OF NEW EQUIPMENT IN ALL FIVE BUILDINGS SHALL BE DONE SIMULTANEOUSLY IN ONE NIGHT (8 HOURS). THE CONTRACTOR SHALL STAFF THE JOB ACCORDINGLY.

NOTE: ANY ISSUE IDENTIFIED BY THE DEPARTMENT DURING THE 60 DAY OBSERVATION PERIOD IN EITHER THE NEW CONTROL LOGIX HARDWARE OR SOFTWARE, WILL REQUIRE FOR EVERY ONE (1) DAY THE CONTRACTOR IS REQUIRED TO MITIGATE/FIX A PROBLEM, AND ADDITIONAL ONE (1) DAY WILL BE ADDED TO THE 60-DAY PERIOD.

FILE NAME = \$FILES\$ \$MODEL\$NAME\$	USER NAME = \$USERS\$	DESIGNED - RJR	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGING PLAN - REVLAC PLC CONTROL SYSTEM UPGRADE				F.A.I. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - PA	REVISED -						90/94	2017-0181	COOK	36	28
	PLOT SCALE = \$SCALES\$	CHECKED - MBS	REVISED -		CONTRACT NO. 62F40								
	PLOT DATE = \$DATES\$	DATE - 10/6/2017	REVISED -		ILLINOIS FED. AID PROJECT								
					SCALE:	SHEET 28	OF 36	SHEETS	STA.	TO STA.			

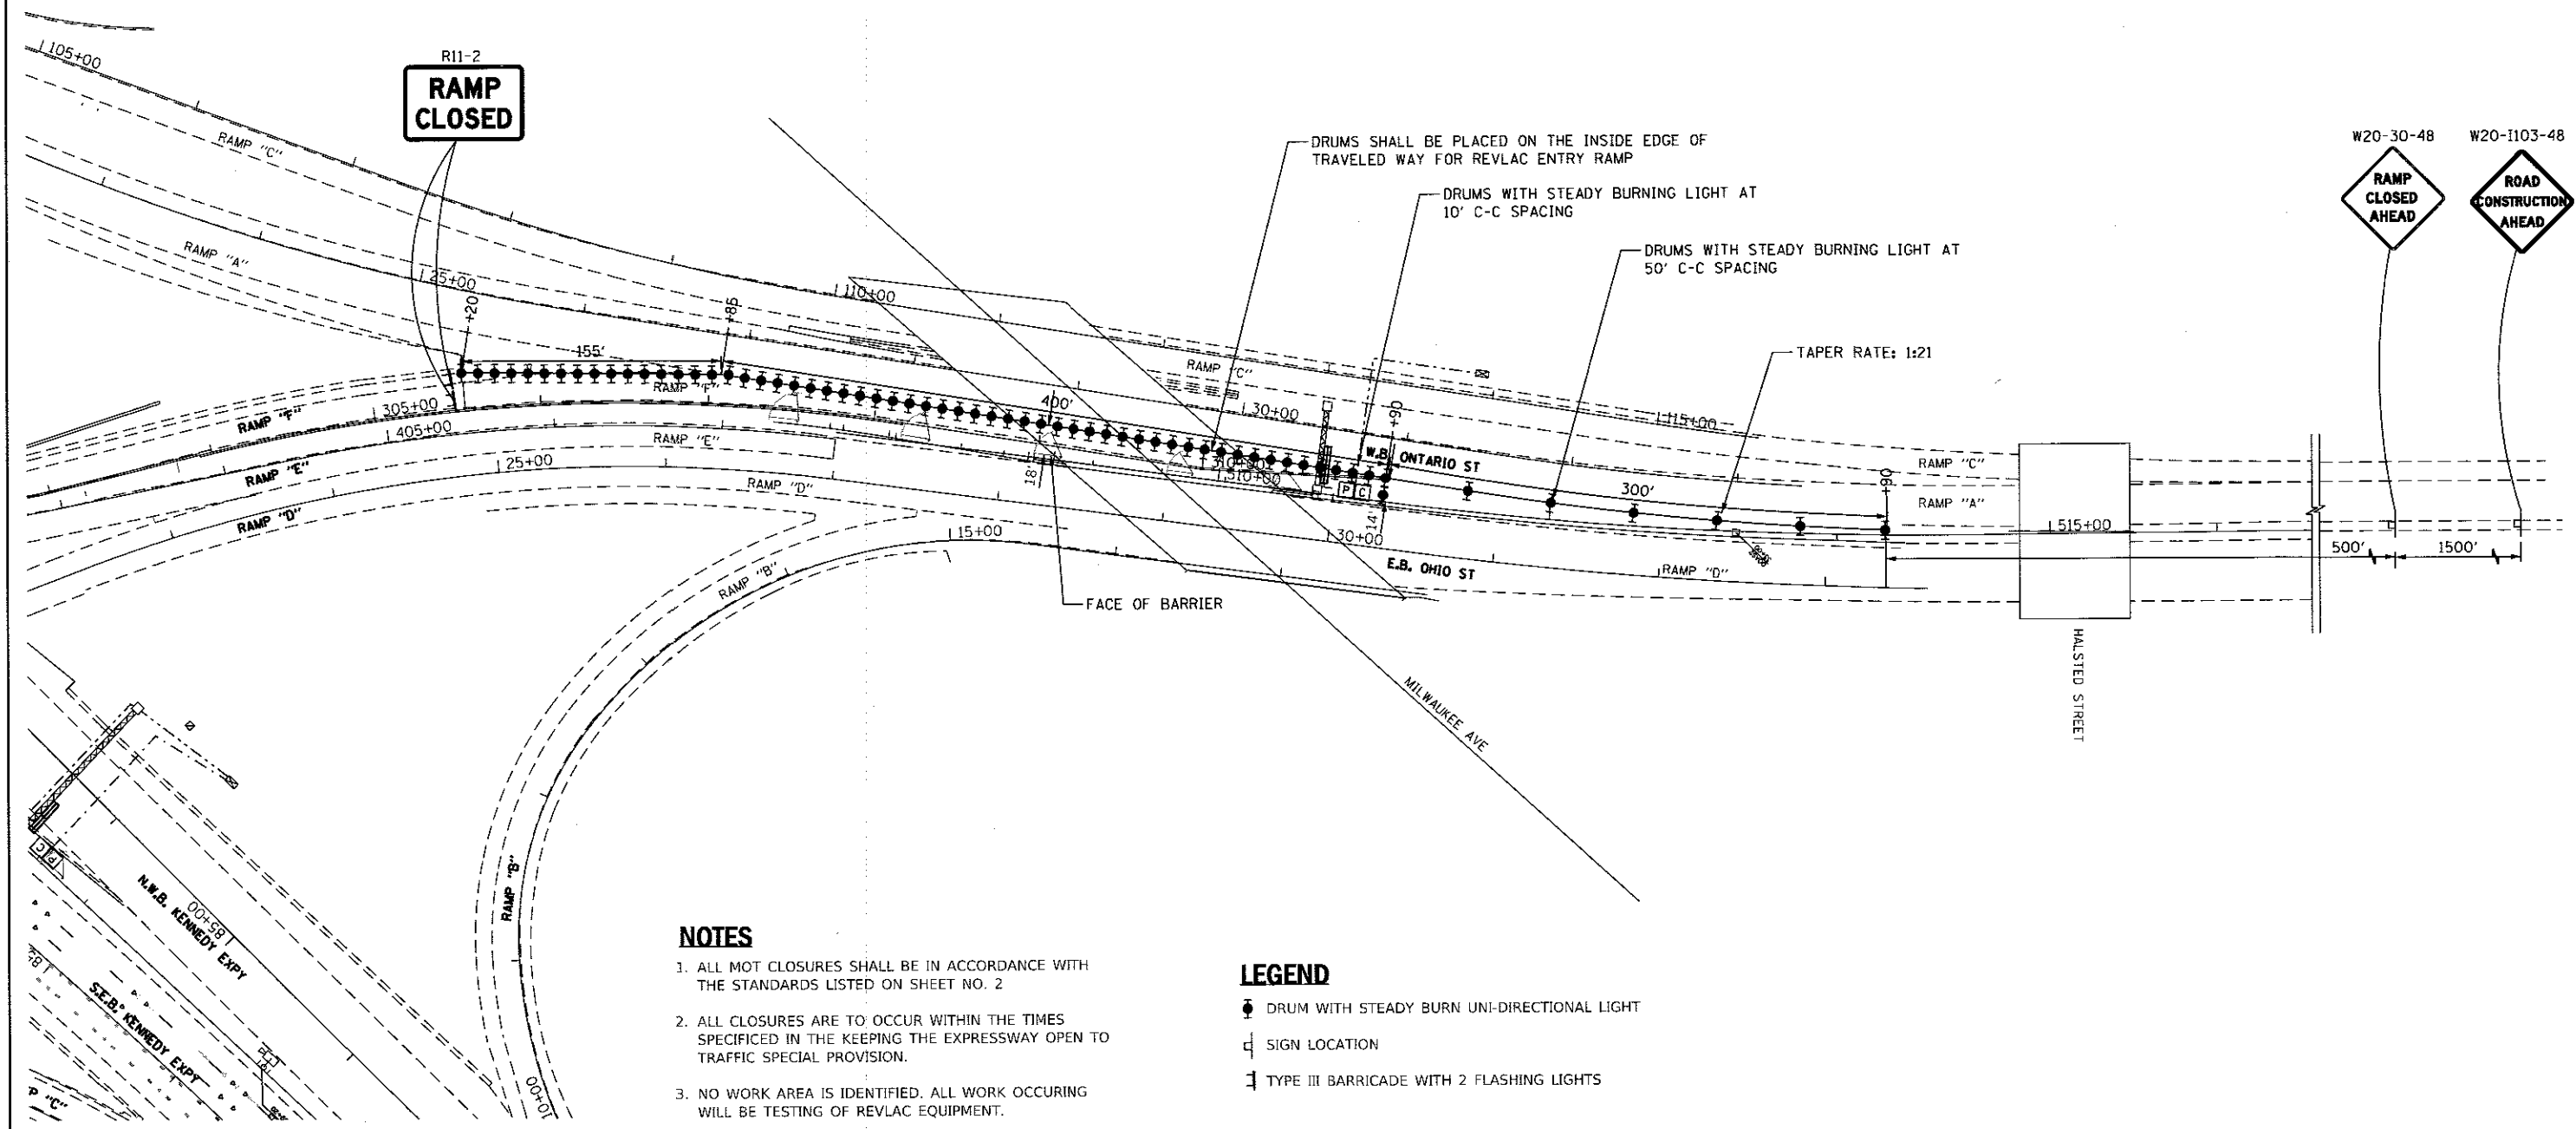



NOTES

1. ALL MOT CLOSURES SHALL BE IN ACCORDANCE WITH THE STANDARDS LISTED ON SHEET NO. 2
2. ALL CLOSURES ARE TO OCCUR WITHIN THE TIMES SPECIFIED IN THE KEEPING THE EXPRESSWAY OPEN TO TRAFFIC SPECIAL PROVISION.
3. NO WORK AREA IS IDENTIFIED. ALL WORK OCCURING WILL BE TESTING OF REVLAC EQUIPMENT.
4. THE CLOSURE SHOWN ON THIS SHEET APPLIES TO THE OUTBOUND ONTARIO STREET RAMP AND WILL BE PAID FOR AS 'TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 1'.

LEGEND

- DRUM WITH STEADY BURN UNI-DIRECTIONAL LIGHT
- SIGN LOCATION
- ⌵ TYPE III BARRICADE WITH 2 FLASHING LIGHTS

FILE NAME = SFILES SMODEL NAMES	USER NAME = SUSER\$	DESIGNED - KSB	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 1- OUTBOUND ONTARIO, 00				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - KSB	REVISED -						90/94	2017-0181	COOK	36	29
	PLOT SCALE = SSCAL\$	CHECKED - MMK	REVISED -						CONTRACT NO. 62F40				
	PLOT DATE = SDATE\$	DATE - 10/6/2017	REVISED -						ILLINOIS FED. AID PROJECT				
				SCALE: 1" = 50'	SHEET 29	OF 36	SHEETS	STA.	TO STA.				

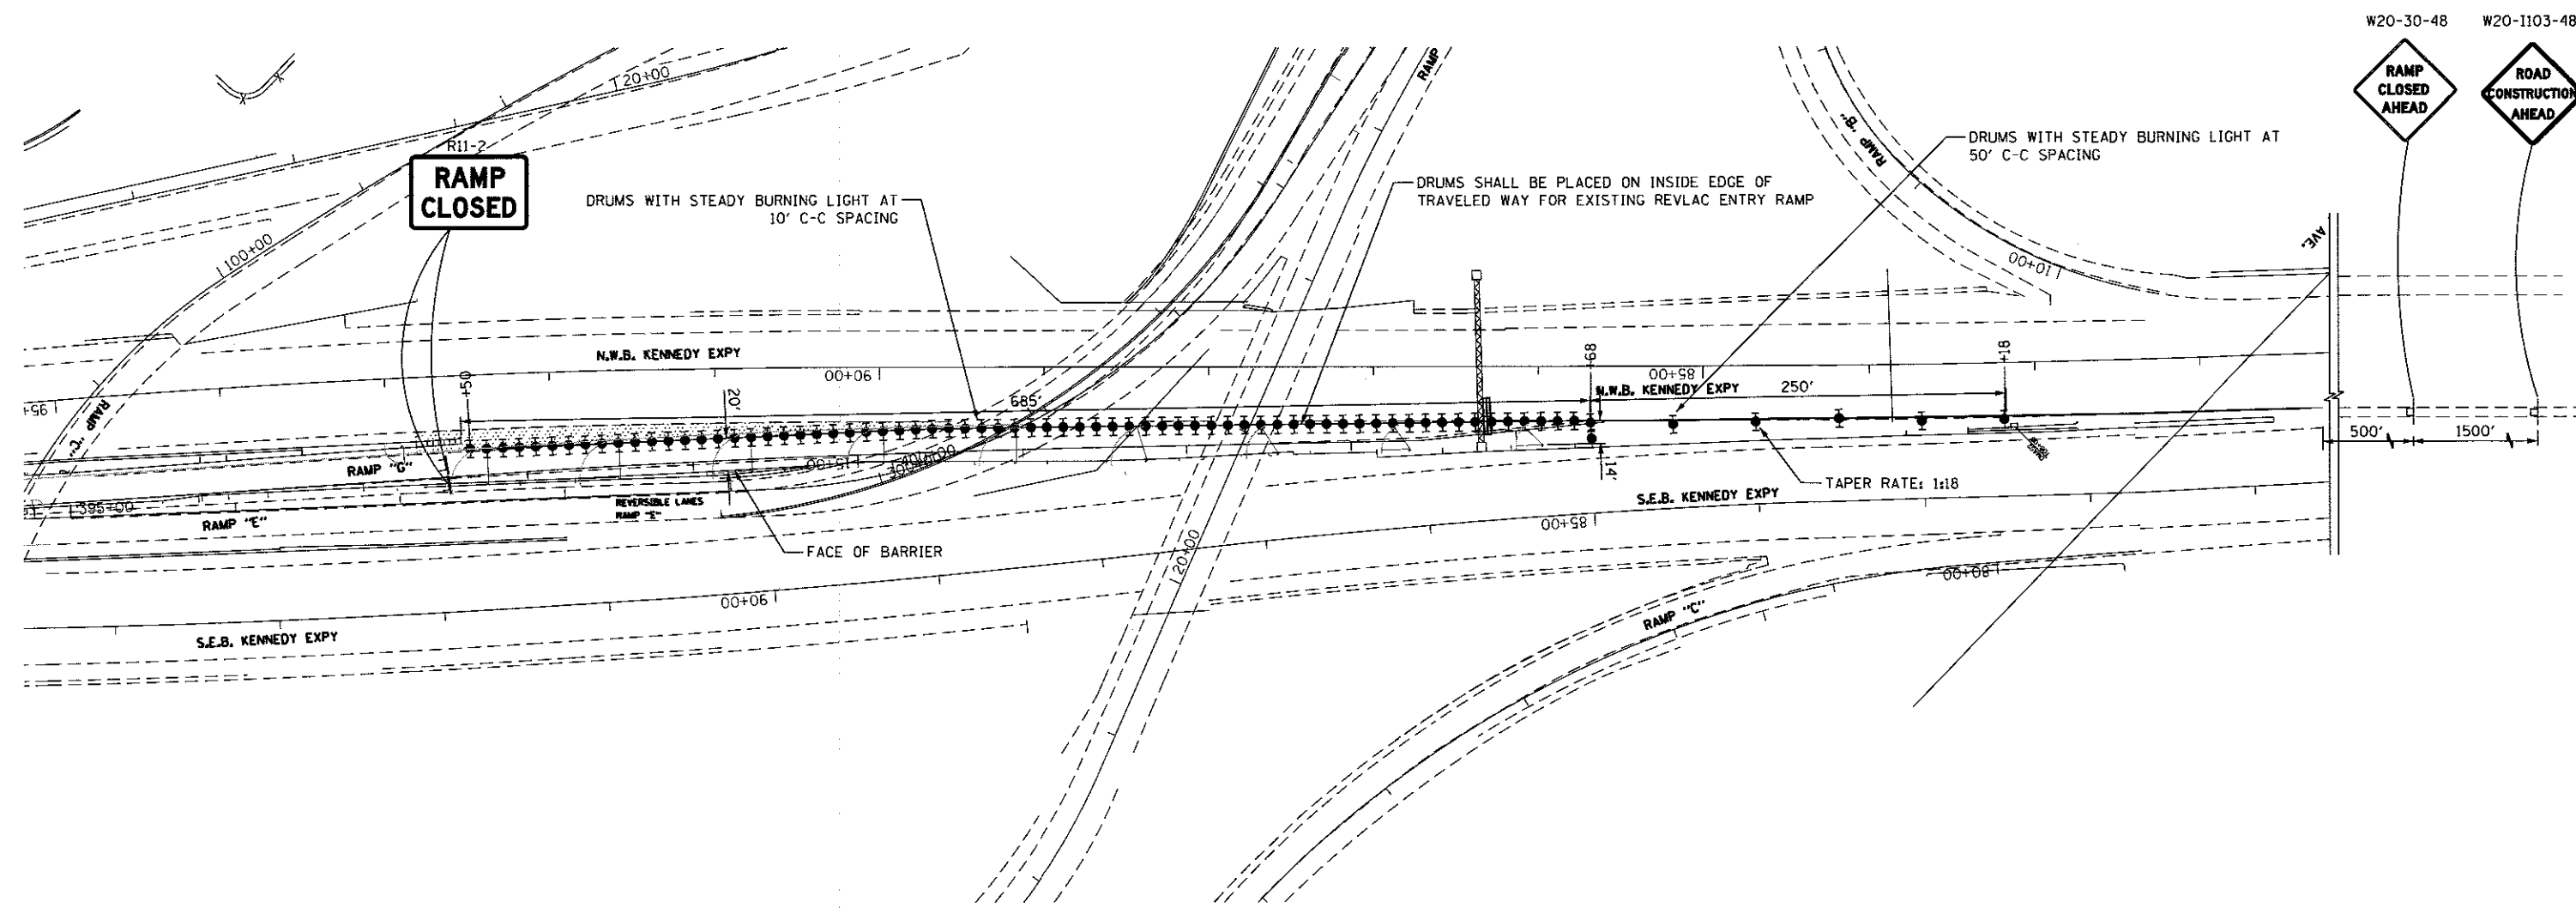


NOTES

1. ALL MOT CLOSURES SHALL BE IN ACCORDANCE WITH THE STANDARDS LISTED ON SHEET NO. 2
2. ALL CLOSURES ARE TO OCCUR WITHIN THE TIMES SPECIFIED IN THE KEEPING THE EXPRESSWAY OPEN TO TRAFFIC SPECIAL PROVISION.
3. NO WORK AREA IS IDENTIFIED. ALL WORK OCCURRING WILL BE TESTING OF REVLAC EQUIPMENT.
4. THE CLOSURE SHOWN ON THIS SHEET APPLIES TO THE OUTBOUND KENNEDY MAINLINE RAMP AND WILL BE PAID FOR AS TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 2'.

LEGEND

- DRUM WITH STEADY BURN UNI-DIRECTIONAL LIGHT
- ⊢ SIGN LOCATION
- ⊢ TYPE III BARRICADE WITH 2 FLASHING LIGHTS

FILE NAME = \$FILESS \$MODELNAME\$	USER NAME = \$USERS	DESIGNED - KSB	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 2 - OUTBOUND MAINLINE, OM				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - KSB	REVISED -						90/94	2017-0181	COOK	36	30
	PLOT SCALE = \$SCALES	CHECKED - MMK	REVISED -		CONTRACT NO. 62F40								
	PLOT DATE = \$DATES	DATE - 10/6/2017	REVISED -		SCALE: 1" = 50'	SHEET 30	OF 36	SHEETS	STA.	TO STA.	ILLINOIS	FED. AID PROJECT	

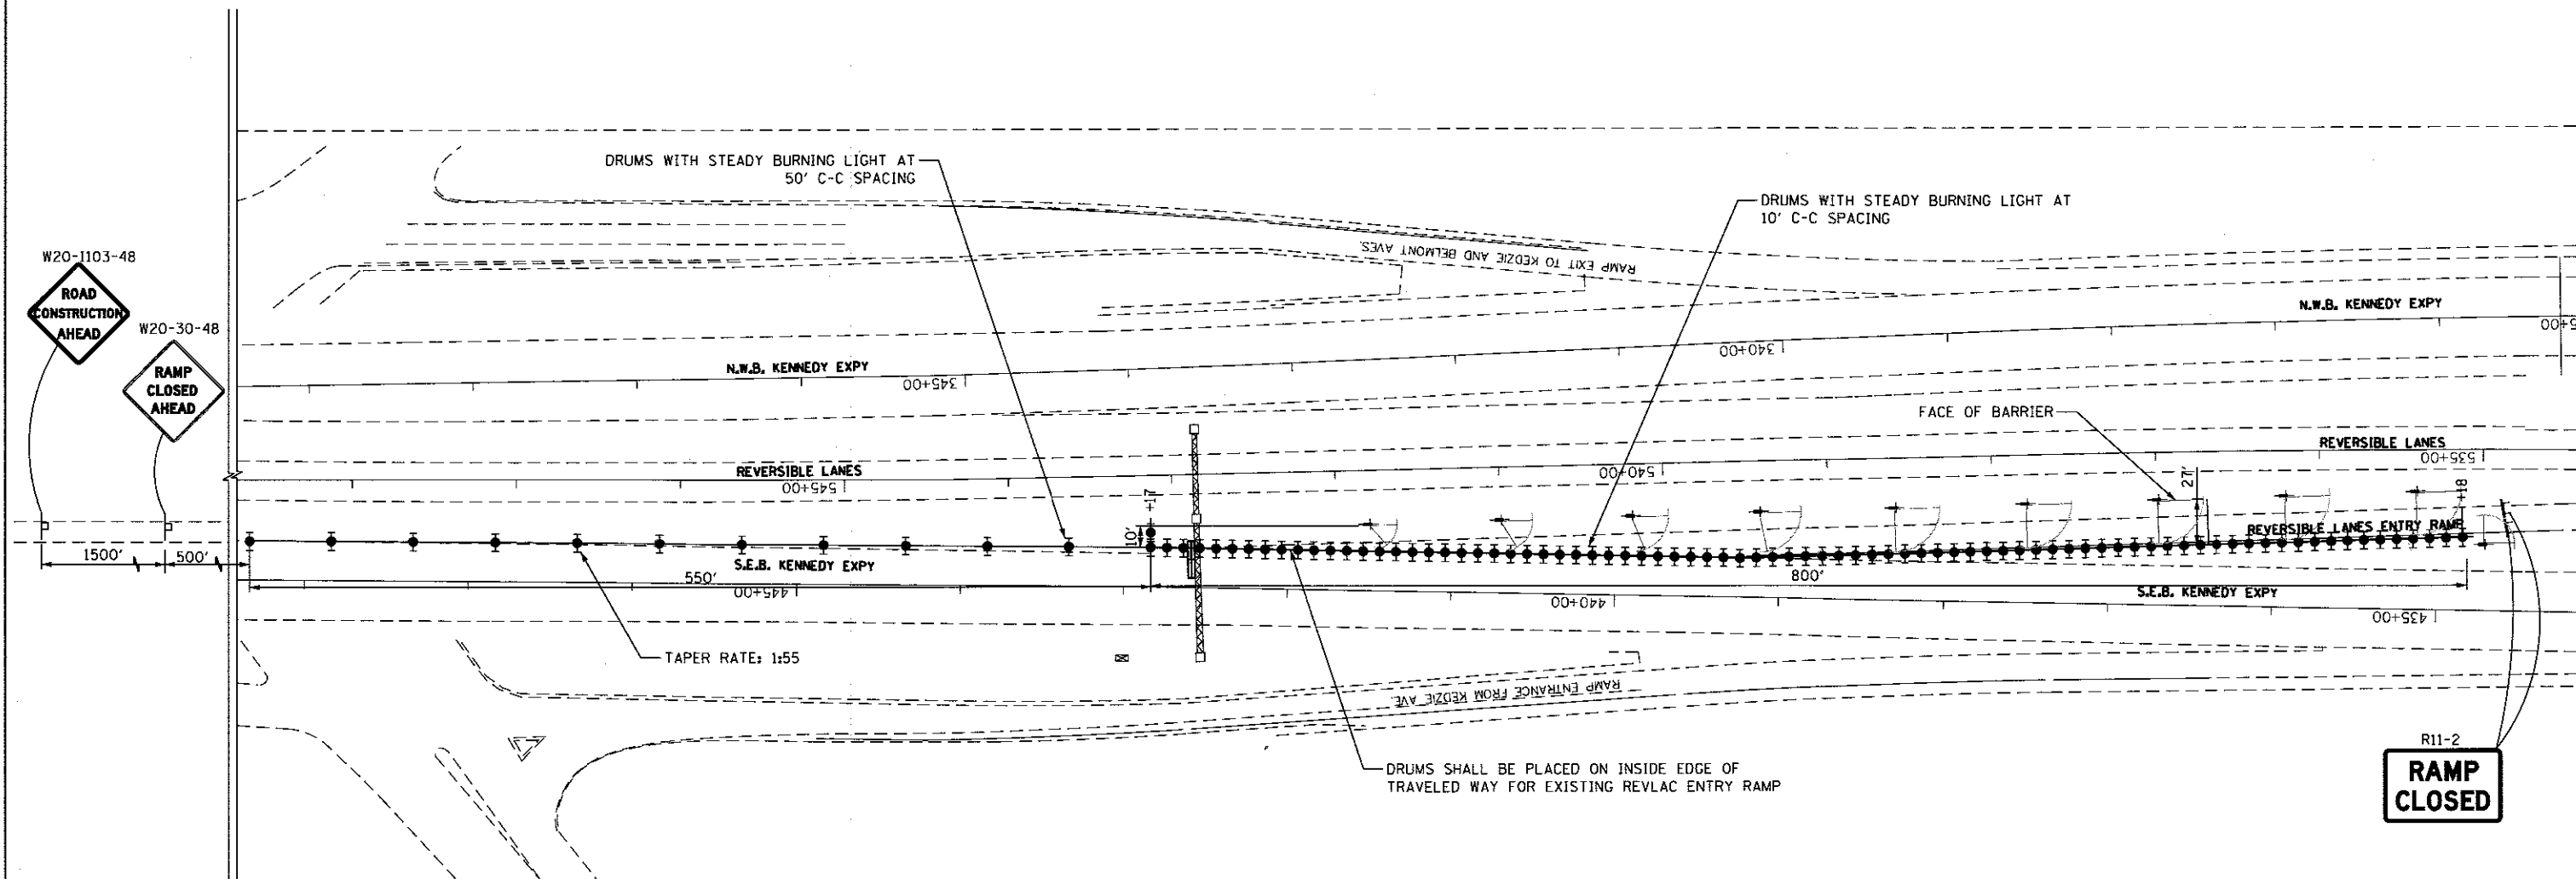



NOTES

- 1. ALL MOT CLOSURES SHALL BE IN ACCORDANCE WITH THE STANDARDS LISTED ON SHEET NO. 2
- 2. ALL CLOSURES ARE TO OCCUR WITHIN THE TIMES SPECIFIED IN THE KEEPING THE EXPRESSWAY OPEN TO TRAFFIC SPECIAL PROVISION.
- 3. NO WORK AREA IS IDENTIFIED. ALL WORK OCCURING WILL BE TESTING OF REVLAC EQUIPMENT.
- 4. THE CLOSURE SHOWN ON THIS SHEET APPLIES TO THE INBOUND SLIP RAMP AND WILL BE PAID FOR AS 'TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 4'.

LEGEND

- DRUM WITH STEADY BURN UNI-DIRECTIONAL LIGHT
- SIGN LOCATION
- ⌵ TYPE III BARRICADE WITH 2 FLASHING LIGHTS

FILE#	FILE NAME =	USER NAME = \$USERS	DESIGNED - KSB	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 5 - INBOUND EDENS, IE				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	\$FILESS		DRAWN - KSB	REVISED -						90/94	2017-0181	COOK	36	33
		PLOT SCALE = \$SCALES	CHECKED - MMK	REVISED -		CONTRACT NO. 62F40								
	\$MODELNAME\$	PLOT DATE = \$DATES	DATE - 10/6/2017	REVISED -		SCALE: 1" = 50'	SHEET 33	OF 36	SHEETS	STA.	TO STA.		ILLINOIS	FED. AID PROJECT

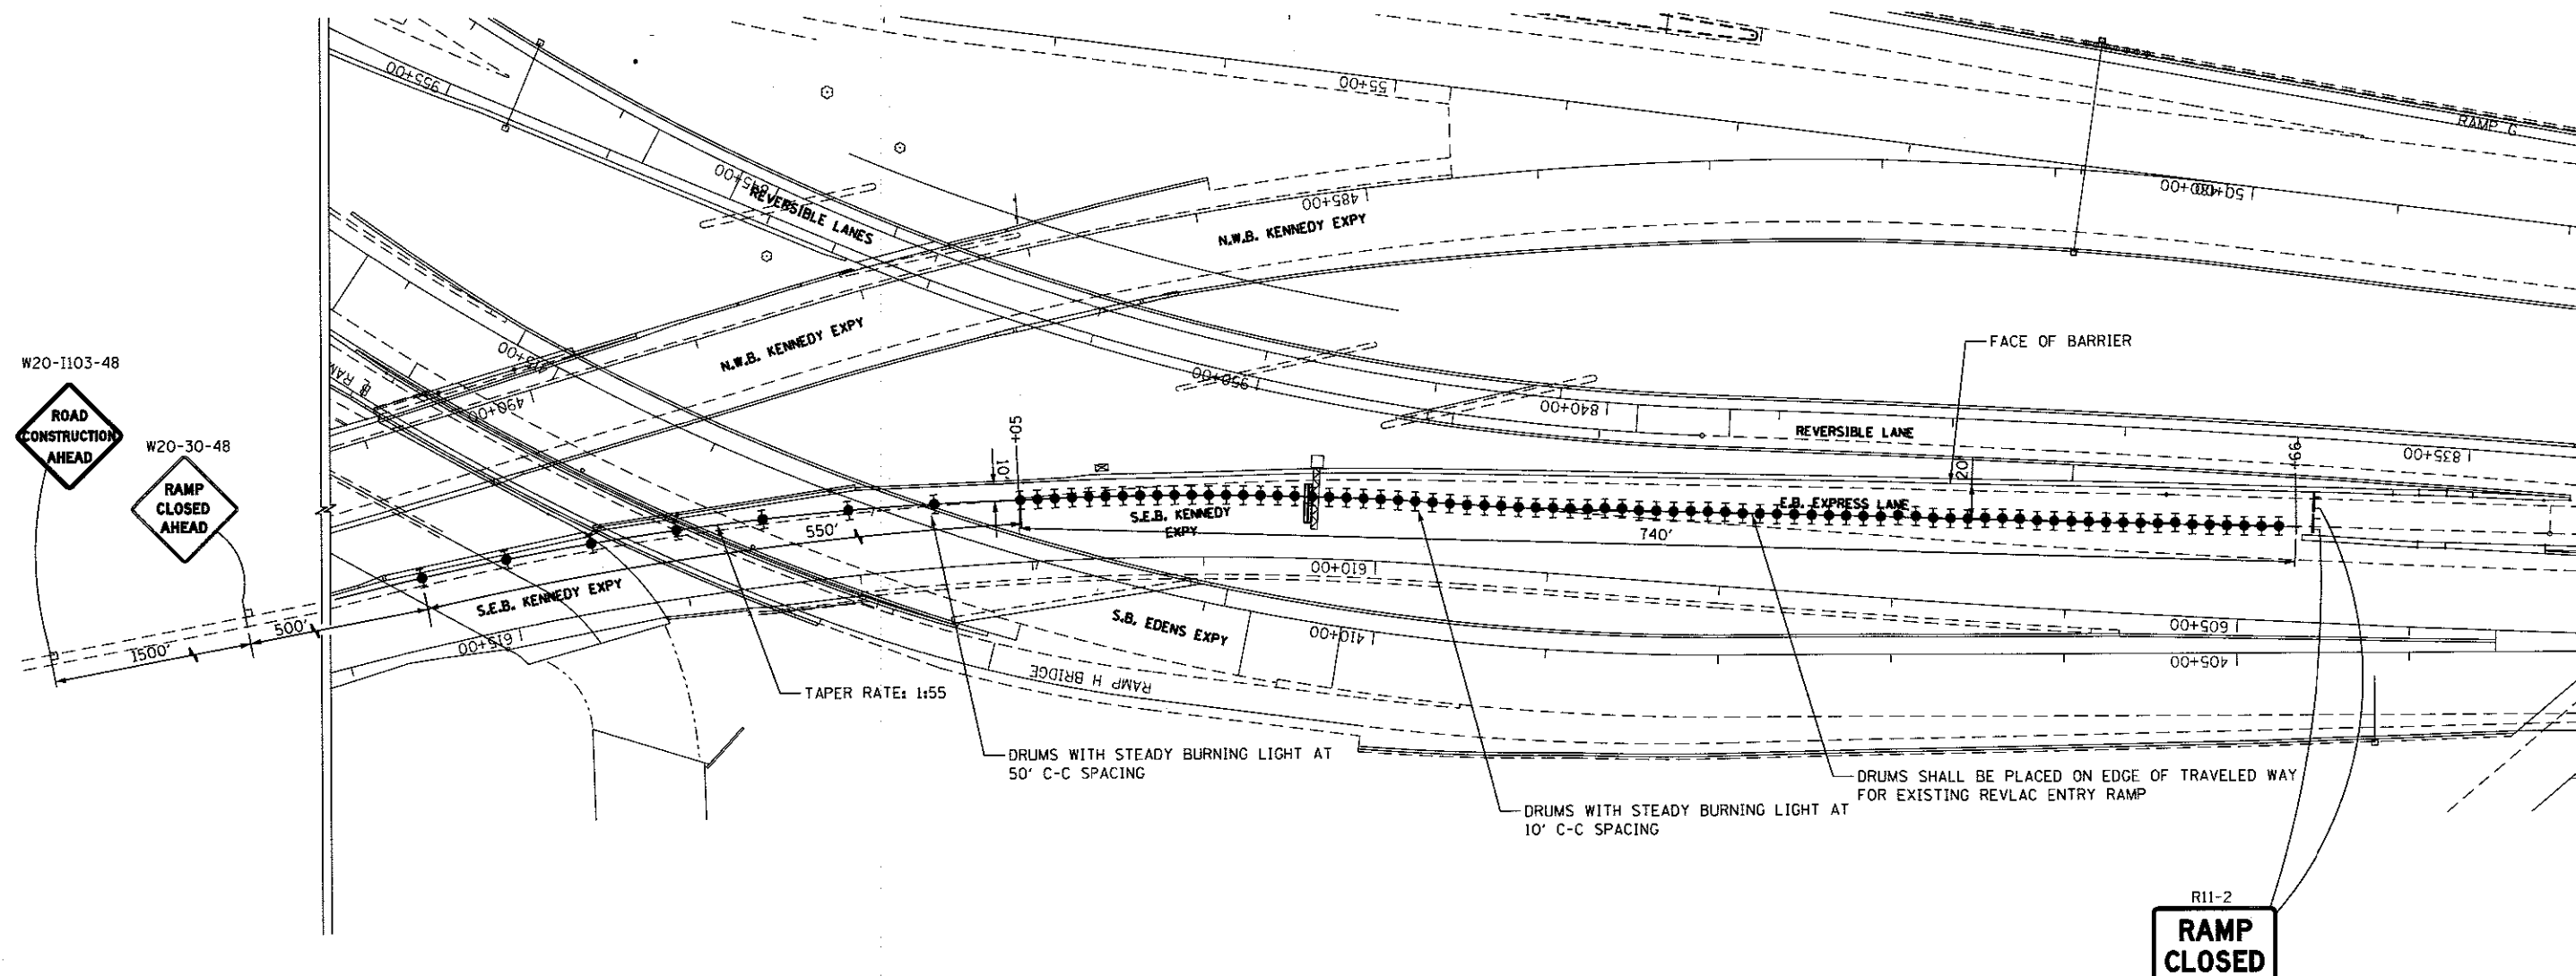


NOTES

1. ALL MOT CLOSURES SHALL BE IN ACCORDANCE WITH THE STANDARDS LISTED ON SHEET NO. 2
2. ALL CLOSURES ARE TO OCCUR WITHIN THE TIMES SPECIFIED IN THE KEEPING THE EXPRESSWAY OPEN TO TRAFFIC SPECIAL PROVISION.
3. NO WORK AREA IS IDENTIFIED. ALL WORK OCCURRING WILL BE TESTING OF REVLAC EQUIPMENT.
4. THE CLOSURE SHOWN ON THIS SHEET APPLIES TO THE INBOUND KENNEDY WEST LEG RAMP AND WILL BE PAID FOR AS 'TRAFFIC CONTROL AND PROTECTION, STANDARD 701401, LOCATION 6'.

LEGEND

- DRUM WITH STEADY BURN UNI-DIRECTIONAL LIGHT
- SIGN LOCATION
- ⌞ TYPE III BARRICADE WITH 2 FLASHING LIGHTS

TITLES	FILE NAME =	USER NAME = \$USERS	DESIGNED - KSB	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC - ENTRY RAMP CLOSURE LOCATION 6 - INBOUND WEST LEG, IW				R.A.I. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	\$FILESS		DRAWN - KSB	REVISED -						90/84	2017-0181	COOK	36	34
	\$MODELNAME\$	PLOT SCALE = \$SCALE\$	CHECKED - MMK	REVISED -						CONTRACT NO. 62F40				
		PLOT DATE = \$DATE\$	DATE - 10/6/2017	REVISED -		ILLINOIS FED. AID PROJECT								
						SCALE: 1" = 50'	SHEET 34	OF 36 SHEETS	STA.	TO STA.				

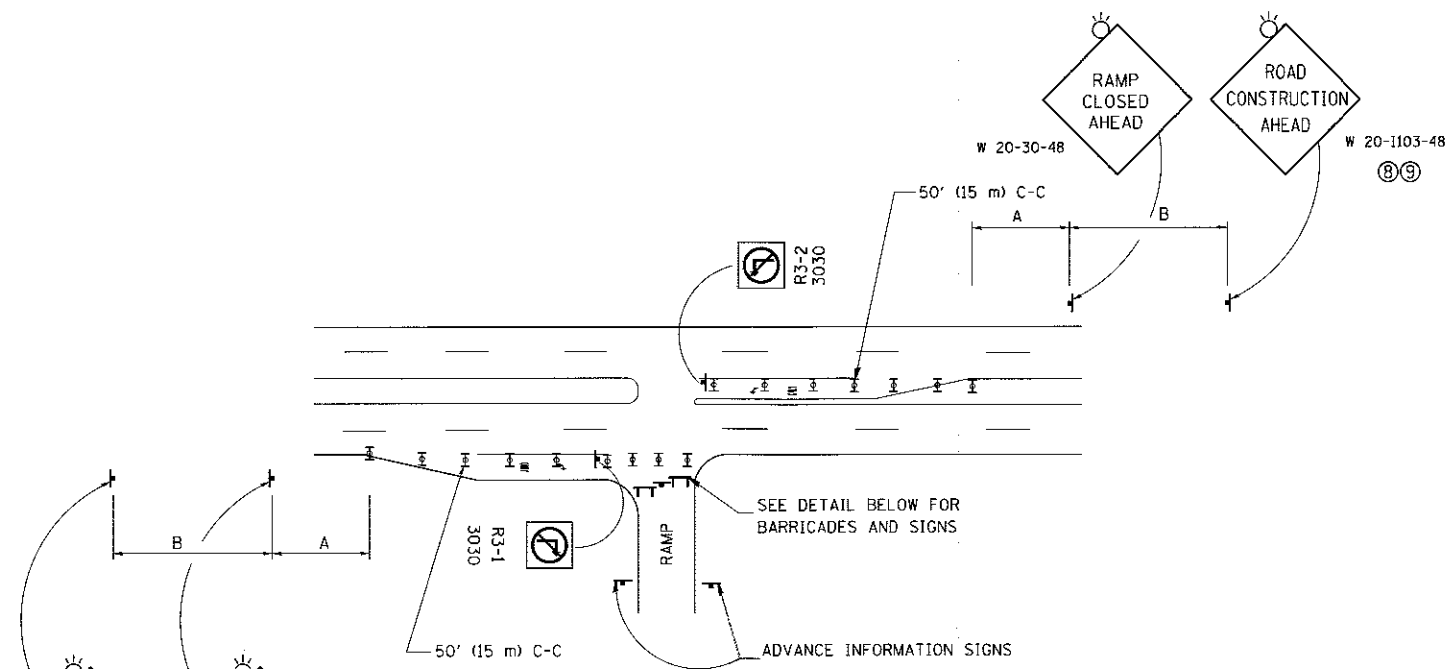


ENTRANCE RAMP CLOSURE

SIGN SPACING TABLE

FACILITY	DISTANCE BETWEEN SIGNS	
	A	B
EXPRESSWAY >24 HOURS	1000' (300 m)	1500' (450 m)
EXPRESSWAY ≤24 HOURS	500' (150 m)	500' (150 m)
ARTERIAL 55 MPH	500' (150 m)	500' (150 m)
ARTERIAL 50-45 MPH	350' (100 m)	350' (100 m)
ARTERIAL <45 MPH	200' (60 m)	200' (60 m)


DISTANCES MAY BE SHORTENED DEPENDING UPON THE PROXIMITY OF ADJACENT RAMPS OR INTERSECTIONS.

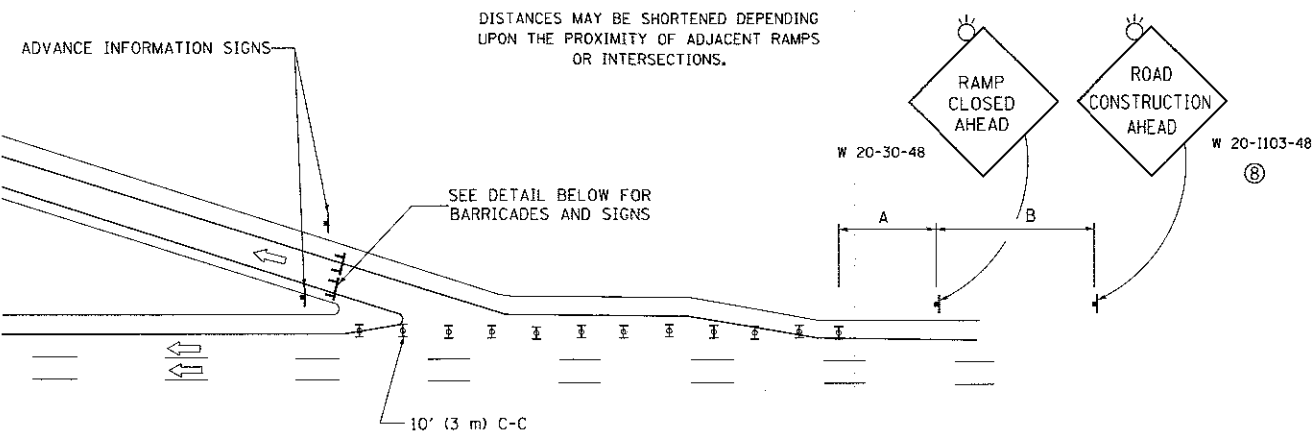

EXIT RAMP CLOSURE


SYMBOLS

- TYPE II BARRICADE OR DRUM WITH STEADY BURN MONO-DIRECTIONAL LIGHT
- TYPE III BARRICADE WITH 2 FLASHING LIGHTS

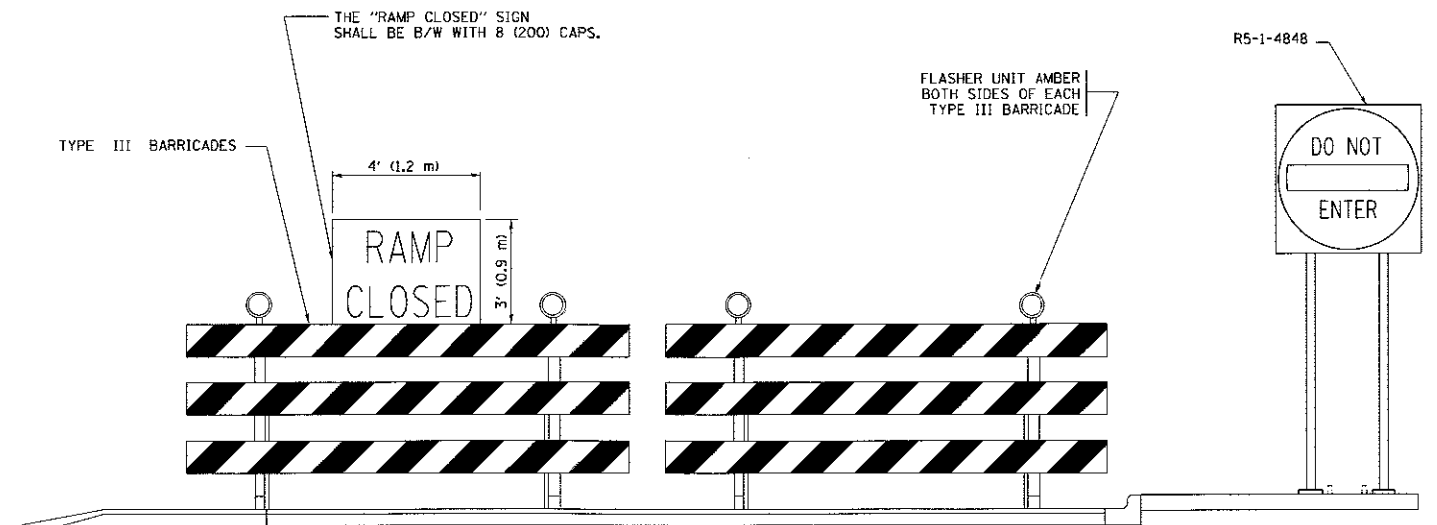


DETAIL FOR REQUIRED BARRICADES & SIGNS

RAMP CLOSURE ADVANCE WARNING SIGN

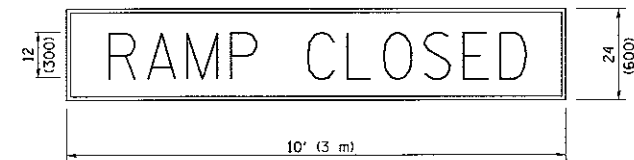

BLACK LEGEND ON ORANGE BACKGROUND MOUNTED DIAGONALLY
E MOD FONT
1 (25) BORDER
THESE SIGNS ARE REQUIRED ON ALL THE EXIT GUIDE SIGNS FOR EXIT RAMPS THAT WILL BE CLOSED FOR MORE THAN FOUR (4) CONSECUTIVE DAYS.

RAMP CLOSURE ADVANCE INFORMATION SIGN

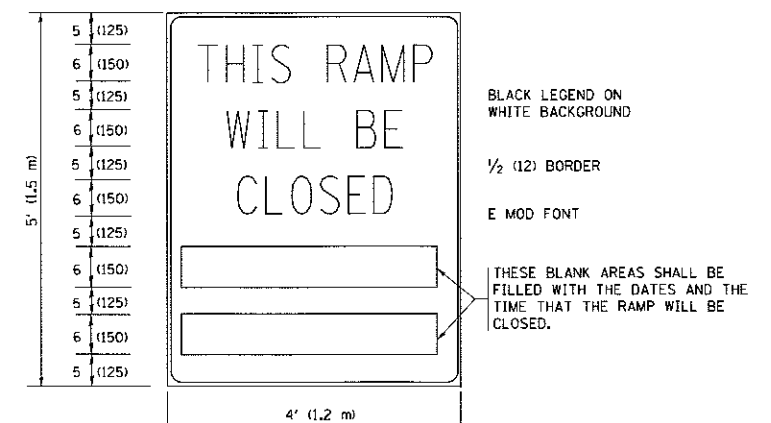

BLACK LEGEND ON WHITE BACKGROUND

1/2 (12) BORDER

E MOD FONT

THESE BLANK AREAS SHALL BE FILLED WITH THE DATES AND THE TIME THAT THE RAMP WILL BE CLOSED.

THESE SIGNS ARE REQUIRED ON BOTH SIDES OF THE RAMP, MINIMUM OF 1 WEEK IN ADVANCE OF THE CLOSURE.

THESE SIGNS SHALL BE FABRICATED AND PAID FOR ACCORDING TO THE TEMPORARY INFORMATION SIGNING SPECIAL PROVISION


GENERAL NOTES:

- CONES MAY BE SUBSTITUTED FOR DRUMS OR TYPE II BARRICADES DURING DAY OPERATIONS. CONES SHALL BE A MINIMUM OF 28 (700) HIGH.
- STEADY BURN LIGHTS WILL NOT BE REQUIRED FOR DAY OPERATIONS.
- A FLAGGER SHALL BE POSITIONED AT EACH CLOSED RAMP THAT IS OPEN TO CONSTRUCTION VEHICLES, PRECEDED BY A W20-7 FLAGGER WARNING SIGN.
- ALL ROUTE MARKERS AND TRAILBLAZER ASSEMBLIES WHICH DIRECT MOTORISTS TO A CLOSED ENTRANCE RAMP SHALL BE COVERED WHEN THE RAMP IS CLOSED FOR MORE THAN FOUR (4) DAYS.
- THE SIGNING AND BARRICADING WHICH IS REQUIRED BY THIS DETAIL SHALL BE INCLUDED IN THE COST OF TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS).
- AUTHORIZATION FROM THE DISTRICT'S BUREAU OF TRAFFIC IS REQUIRED FOR ALL RAMP CLOSURES.
- THE RAMP CLOSURE ADVANCE INFORMATION SIGNS SHALL BE ERECTED IF THE CLOSURE TIME EXCEEDS TWENTY-FOUR (24) HOURS. ADDITIONAL ADVANCE WARNING SIGNS ON EXIT GUIDE SIGNING WILL BE REQUIRED FOR EXIT RAMP CLOSURES THAT EXCEED FOUR (4) DAYS IN LENGTH.
- ROAD CONSTRUCTION AHEAD SIGNS MAY BE OMITTED WHEN THIS DETAIL IS USED IN CONJUNCTION WITH OTHER TRAFFIC CONTROL THAT ALREADY INCLUDES A ROAD CONSTRUCTION AHEAD SIGN.
- ARTERIAL ROAD CONSTRUCTION AHEAD SIGNS SHALL BE INSTALLED ON THE LEFT SIDE OF TRAFFIC IF THE MEDIAN IS MORE THAN 10 FT WIDE.


ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME =	USER NAME = footemj	DESIGNED - DWS	REVISED - JAF 02-06	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	ENTRANCE AND EXIT RAMP CLOSURE DETAILS	F.A. RTE. 90/94	SECTION 2017-0181	COUNTY COOK	TOTAL SHEETS 36	SHEET NO. 35
cs\pwork\pwork\footemj\d0108315\cd08.dgn		DRAWN -	REVISED - SPB 01-07							
	PLOT SCALE = 50,000' / 1" =	CHECKED -	REVISED - SPB 12-09							
	PLOT DATE = 7/8/2013	DATE - 02-83	REVISED - MD 06-13							
				SCALE: NONE		SHEET NO. 1 OF 1 SHEETS		STA. TO STA.		TC-08 FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT CONTRACT NO. 62F40


PARTIAL RAMP CLOSURE DETAILS

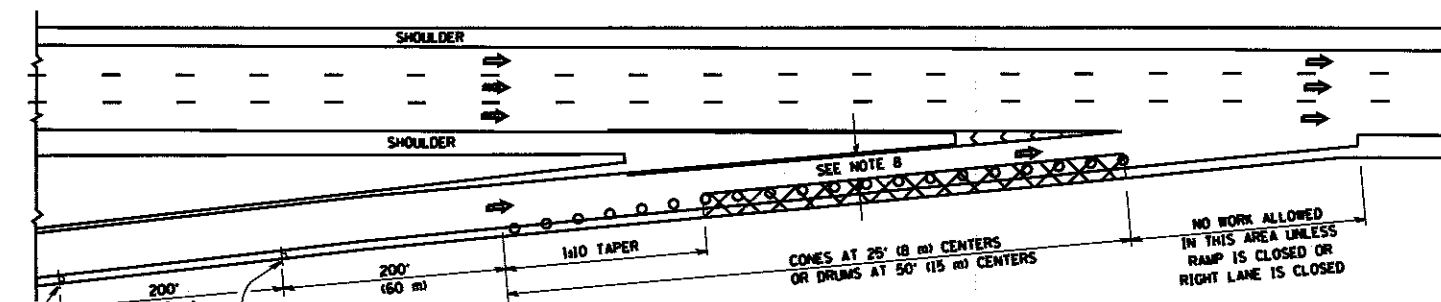

TYPICAL ENTRANCE RAMP

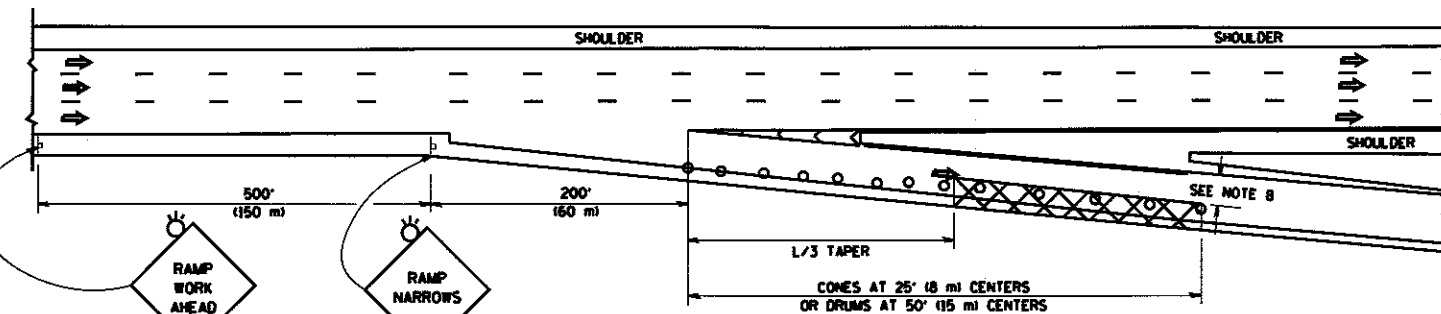

TYPICAL EXIT RAMP

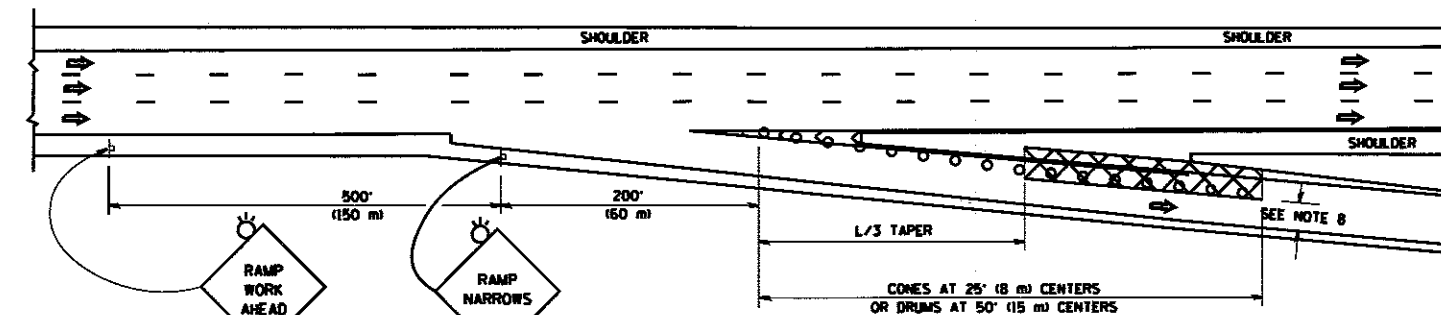

TYPICAL EXIT RAMP

SYMBOLS

- ACTIVE WORK AREA
- SIGN ON PORTABLE OR PERMANENT SUPPORT
- FLAGGER WITH CONTROL SIGN
- TYPE II BARRICADE OR DRUM WITH STEADY BURN MONO-DIRECTIONAL LIGHT
- CONE, DRUM OR BARRICADE
- IMPACT ATTENUATOR OF TYPE AND TEST LEVEL SPECIFIED


GENERAL NOTES

- THE "L" DISTANCE EQUALS:


SPEED LIMIT	FORMULAS
45 mph (80 km/h) OR GREATER	METRIC: $L = 0.65(WKS)$ ENGLISH: $L = (WKS)$

W = WIDTH OF OFFSET IN FEET (METERS)
S = NORMAL POSTED SPEED MPH (KM/H)
- PLASTIC DRUMS WITH HIGH PERFORMANCE REFLECTIVE SHEETING AND STEADY BURNING LIGHTS ARE REQUIRED FOR ALL NIGHTTIME CLOSURES.
- ALL SIGNS SHALL BE POST MOUNTED IF THE CLOSURE TIME EXCEEDS FOUR DAYS.
- FLASHING LIGHTS SHALL BE USED DURING THE HOURS OF DARKNESS AND SHALL BE INSTALLED ABOVE THE FIRST TWO SETS OF SIGNS.

SHOULDER CLOSURE DETAILS

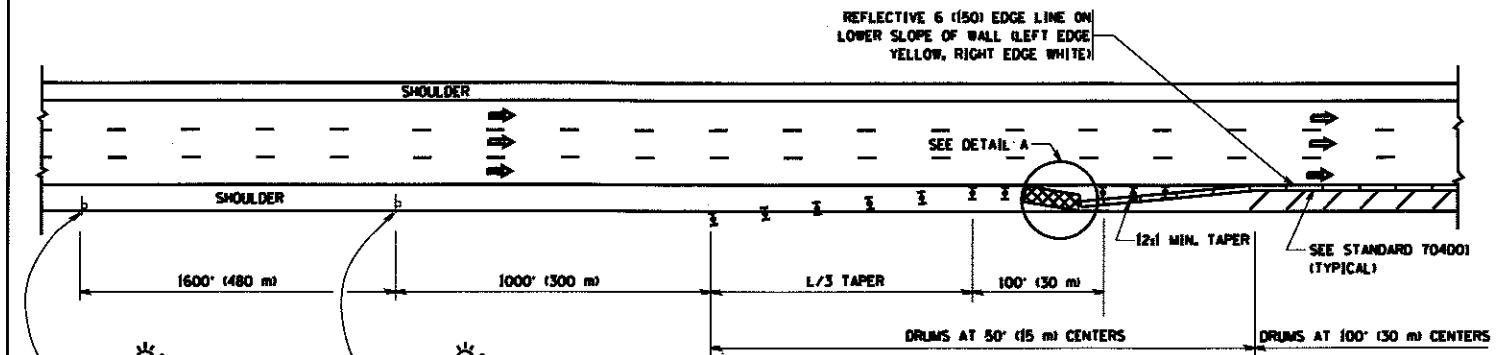

PERMANENT SHOULDER CLOSURE

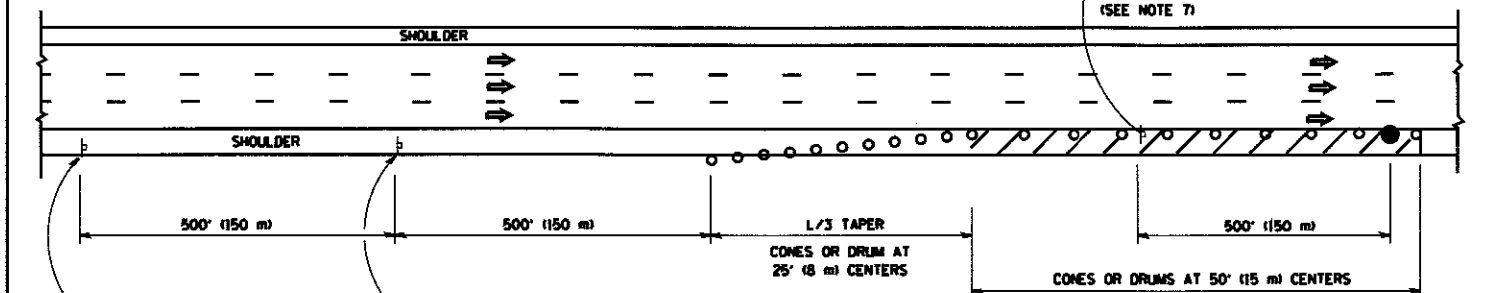

DAYTIME SHOULDER CLOSURE

ARRAY DESIGN PER MANUFACTURER TO BE NCHRP 350/MASH COMPLIANT.

DETAIL "A"
IMPACT ATTENUATOR, TEMPORARY
(SEE NOTE 5)

- THE IMPACT ATTENUATOR, TEMPORARY IS NOT REQUIRED WHEN THE TEMPORARY CONCRETE BARRIER WALL IS PROTECTED BY OR IS TIED INTO THE EXISTING GUARDRAIL. IF OFFSET IS LESS THAN 5 FEET USE NARROW USE TYPE DEVICE TO MEET NCHRP350/MASH.
- AUTHORIZATION FROM THE DISTRICT'S BUREAU OF TRAFFIC IS REQUIRED FOR ALL FREEWAY CLOSURES.
- THE FLAGGER AND FLAGGER SIGN ARE REQUIRED AT THE ABOVE WORK SITES WHEN:
 - FOUR OR MORE WORK VEHICLES ENTER THE TRAFFIC LANES IN A ONE HOUR PERIOD.
 - THE WORK ACTIVITY REQUIRES FREQUENT ENCRDACHMENT INTO THE LANE OPEN TO TRAFFIC.
 THE FLAGGER SHALL BE STATIONED APPROXIMATELY 100' (30 m) TO 200' (60 m) IN ADVANCE OF THE WORKERS.
- 12' MIN. WIDTH TANGENT SECTION
16' MIN. WIDTH CURVE SECTION.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME =	USER NAME = leysa	DESIGNED -	REVISED - J.A.F. 12-06	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TRAFFIC CONTROL DETAILS FOR FREEWAY SHOULDER CLOSURES AND PARTIAL RAMP CLOSURES			F.A. RTE. 90/94	SECTION 2017-0181	COUNTY COOK	TOTAL SHEETS 36	SHEET NO. 36
cr:\pe_work\pedit\leysa\080315\17.dgn		DRAWN - D.W.S.	REVISED - S.P.B. 01-07		SCALE: NONE			TC-17				CONTRACT NO. 62F40
		CHECKED -	REVISED - S.P.B. 12-09		SHEET NO. 1 OF 1 SHEETS			FED. ROAD DIST. NO. 1 (ILLINOIS) FED. AID PROJECT				
		DATE - 11-96	REVISED - M.D. 06-13		TO STA.							