INDEX OF SHEETS

- 1 COVER SHEET
- INDEX OF SHEETS, GENERAL NOTES, LEGEND AND TYPICAL SECTIONS
- 3 ALIGNMENTS AND BENCHMARKS
- SUMMARY OF QUANTITIES
- 5 SCHEDULE OF QUANTITIES
- 6-12 SIDEWALK PLANS
- 13-30 SIDEWALK CROSS SECTIONS
- 31 ARTICULATED BLOCK MAT PLANS
- 32-35 ARTICULATED BLOCK MAT CROSS SECTIONS
- 36 EROSION CONTROL PLANS
- 37-40 LIGHTING PLANS

GENERAL NOTES

- 1. ALL CASTINGS TO BE REMOVED SHALL REMAIN THE PROPERTY OF THE CITY OF EFFINGHAM. UPON REMOVAL, THE CONTRACTOR SHALL STOCKPILE THE CASTINGS AT A LOCATION WITHIN THE CONSTRUCTION LIMITS AS SPECIFIED BY THE ENGINEER FOR REMOVAL THE CITY.
- 2. THE FINAL FOUR INCHES OF SOIL, IN ANY AREA DISTURBED BY THE CONTRACTOR, MUST MEET THE REQUIREMENTS FOR TOPSOIL IN ARTICLE 1081.05 OF THE STANDARD SPECIFICATIONS. ALL AREAS DISTURBED BY THE CONTRACTOR SHALL BE SEEDED AND FERTILIZED IN ACCORDANCE WITH SECTION 250 AND MULCHED IN ACCORDANCE WITH SECTION 251 MULCH METHOD 2 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER. SEEDING WILL NOT BE PERMITTED AT ANY TIME WHEN THE GROUND IS FROZEN, WET OR IN AN UNTILLABLE CONDITION.
- 3. ALL SIDEWALK CROSS SLOPES SHALL BE LESS THAN 2% AND ALL SIDEWALK LONGITUDINAL SLOPES SHALL BE LESS THAN 5% TO MEET ADA REQUIREMENTS.
- 4. ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUB-NUMBER IN THE INDEX OF SHEETS OR THE COPY OF THE STANDARD INCLUDED IN THESE PLANS.
- 5. THE FOLLOWING HAVE BEEN USED IN CALCULATING PLAN QUANTITIES:

NITROGEN FERTILIZER NUTRIENT - 90 LBS/ACRE PHOSPHERUS FERTILIZER NUTRIENT - 90 LBS/ACRE POTASSIUM FERTILIZER NUTRIENT - 90 LBS/ACRES AGRICULTURAL GROUND LIMESTONE - 2 TONS/ACRE MULCH - 2 TONS/ACRE

- 6. FILTER FABRIC PLACED UNDER THE ARTICULATED BLOCK MAT. SHALL BE INCLUDED IN THE COST FOR ARTICULATED BLOCK MAT. THE OPEN CENLS—SHALL BE FILLED WITH TOPSOIL AND SEEDED.
- 7. SLOPES STEEPER THAN 3:1 SHALL BE STABILIZED WITH AN EROSION CONTROL BLANKET AS INDICATED IN SECTION 251 OF THE STANDARD SPECIFICATIONS EXCEPT THAT THE COST FOR THIS SHALL BE INCLUDED IN THE COST FOR SEEDING.
- 8. ELEVATIONS ARE BASED ON N.A.V.D. 88.
- 9. EXISTING ELECTRIC, TELEPHONE AND WATER UTILITIES TO BE RELOCATED/ADJUSTED BY OTHERS UNLESS OTHERWISE NOTED.

10. ANY DAMAGE TO UNDERGROUND FACILITIES, CAUSED BY THE CONTRACTOR SHALL BE REPAIRED TO THE SATISFACTION OF THE ENGINEER AT THE CONTRACTOR'S EXPENSE, INCLUDING TEMPORARY REPAIRS WHICH MAY BE REQUIRED TO KEEP THE FACILITY OPERATIONAL WHILE MATERIAL IS BEING OBTAINED TO MAKE PERMANENT REPAIRS

- 11. THE LOCATIONS OF THOSE BURIED AND ABOVEGROUND UTILITIES SHOWN ARE APPROXIMATE, ARE SHOWN FOR CONTRACTOR INFORMATIONAL USE ONLY, AND ARE NOT TO BE REFERENCED FOR CONSTRUCTION PURPOSES. THE IMPLIED PRESENCE OR ABSENCE OF UTILITIES IS NOT TO BE CONSTRUED BY THE OWNER, ENGINEER, CONTRACTOR, OR SUBCONTRACTORS TO BE AN ACCURATE AND COMPLETE REPRESENTATION OF UTILITIES THAT MAY OR MAY NOT EXIST ON THE CONSTRUCTION SITE. BURIED AND ABOVEGROUND UTILITY LOCATION, IDENTIFICATION, AND MARKING ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. REROUTING, DISCONNECTION, PROTECTION, ETC. OF ANY UTILITIES MUST BE COORDINATED BETWEEN THE CONTRACTOR, UTILITY COMPANY, AND OWNER. SITE SAFETY, INCLUDING THE AVOIDANCE OF HAZARDS ASSOCIATED WITH BURIED AND ABOVEGROUND UTILITIES, REMAIN THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- 12. IN ACCORDANCE WITH STATE OF ILLINOIS PUBLIC ACT 86-0674, THE CONTRACTOR IS TO NOTIFY ALL UTILITY COMPANIES NOT MORE THAN 14 DAYS NOR LESS THAN 48 HOURS (EXCLUSIVE OF SATURDAYS, SUNDAYS, AND HOLIDAYS) IN ADVANCE OF THE START OF EXCAVATION OR DEMOLITION.

J.U.L.I.E. TELEPHONE NUMBER - 1-800-892-0123

KNOWN UTILITIES LOCATED WITHIN THE LIMITS OF THE IMPROVEMENT ARE: ILLINOIS CONSOLIDATED TELEPHONE COMPANY AMEREN CIPS - GAS & ELECTRIC _____ CITY OF EFFINGHAM - WATER & SEWER



TYPICAL SECTION

- 1 EXISTING PAVEMENT
- ② EXISTING COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24

F.A.U. SECTION

CONTRACT NO. 95474 TOTAL SHEET SHEETS NO.


COUNTY 8361 05-00083-08-SP EFFINGHAM 40 2

TO STA.

FED. ROAD DIST. NO.] ILLINOIS FED. AID PROJECT

- 3 PROPOSED PORTLAND CEMENT CONCRETE SIDEWALK, 4" (SLOPE VARIES, SEE CROSS SECTIONS)
- (4) PROPOSED TOP SOIL PLACEMENT, 4"

PROPOSED TYPICAL SECTIONS

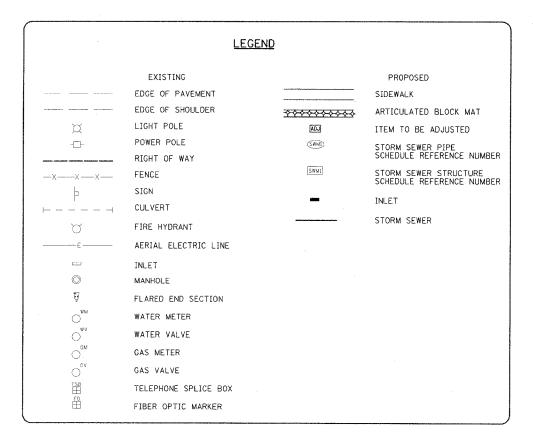

REVISIONS DATE	ILLINOIS DEPARTME	ENT OF TRANSPORTATION
WANE DATE		
	INDEX OF SHE	EETS, LEGEND AND
	GENE	RAL NOTES
	SCALE: VERT. HORIZ.	DRAWN BY JAP
	DATE 03/24/06	CHECKED BY JTB