## STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

#### D 1 REFLECTOR REPL 24-09 MCHENRY 4 1 ILLINOIS CONTRACT NO. 46627

#### INDEX OF SHEETS

- 1. COVER SHEET
- 2. GENERAL NOTES
- 3. SUMMARY OF QUANTITIES
- 4. RAISED REFLECTIVE PAVEMENT MARKER REPLACEMENT LOCATIONS

#### STATE STANDARDS

0

0

0

701301-04 LANE CLOSURE 2L,2W, SHORT TIME OPERATIONS

701311–03 LANE CLOSURE 2L,2W MOVING OPERATIONS—DAY ONLY 1701426–09 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION FOR SPEEDS ≥ 45MPH

701427–05 LANE CLOSURE, MULTILANE, INTERMITTENT


OR MOVING OPERATION FOR SPEEDS ≤ 40MPH

701901-08 TRAFFIC CONTROL DEVICES


# **PROPOSED** HIGHWAY PLANS

**VARIOUS ROUTES** D 1 REFLECTOR REPL 24-09 RAISED REFLECTOR REPLACEMENT **MCHENRY COUNTY** 


M-60-009-24

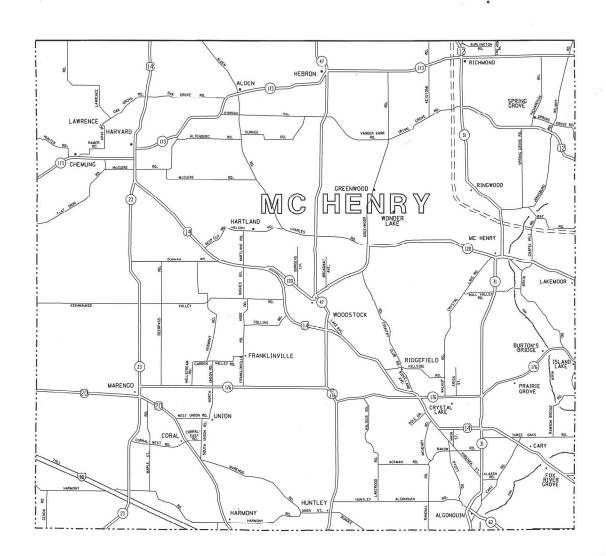





PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS



ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS 1-800-892-0123

OR 811

CONTRACT NO. 46627

### **GENERAL NOTES**

The Department may remove and not install markers in certain locations at the engineer's discretion.

The Department may install markers in certain locations that did previously have markers at the engineer's discretion.

The locations of the repair areas shall be determined by the engineer.

No material should be left on or near the roadway.

Removal of damaged materials will include loading, hauling and disposal.

USER NAME = David.Gonzalez2	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 102.2323 / in	CHECKED -	REVISED -
PLOT DATE = 3/14/2023	DATE -	REVISED -

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

								F.A. RTE	SECTION		COUNTY	TOTAL SHEETS	SHEE NO.
			GE	NEI	RAL NO	TES			D1 REFLECTOR REPL 2	24-09	MCHENRY	4	2
											CONTRACT	NO. 46	627
:	SHEET	2	OF	4	SHEETS	STA.	TO STA.		ILLINOIS	FED. AI	D PROJECT		

CAD)CoverSheets for Contract

CODE NO.	ITEM	UNIT	100% STATE URBAN 0021 QUANTITY
78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	6,198
78100300	REPLACEMENT REFLECTOR	EACH	20,661
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	6,198

AODEL: Default

USER NAME = David.Gonzalez2	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 102.2323 / in.	CHECKED -	REVISED -
PLOT DATE = 3/14/2023	DATE -	REVISED -

								F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	ETS NO.
		SU	MINIA	KKY	OF QU	ANTITIES	5		D1 REFLECTOR REPL 24-	09 MCHENRY	4	3
										CONTRAC	Γ NO. 46	6627
SCALE:	SHEET	3	OF	4	SHEETS	STA.	TO STA.		ILLINOIS FE	D. AID PROJECT		

ROUTE	FROM (WEST/SOUTH LIMIT)	TO (EAST/NORTH LIMIT)	TOTAL	Y/Y	Y/O	W/C
IL-23	McHenry-Dekalb County Line	US - 14	2238	1726	432	80
IL-31	McHenry-Kane County Line	Johnsburg Rd	4736	867	708	316
I L - 47	McHenry-Kane County Line	I L - 173	3976	1740	881	135
IL-62	Sandbloom Rd	IL-31	517	134	100	283
IL-173	McHenry-Boone County Line	McHenry-Lake County Line	4089	2705	1146	238
US-12	State Pk Rd	Wisconsin State Line	2346	1380	726	240
US - 14	US-14 Frontage Rd	Lake Ave	104	0	0	104
US - 20	McHenry-Kane County Line	IL-23	1189	866	257	66
US - 20	I L - 23	McHenry-Boone County Line	1164	824	265	75
I L - 47	IL-173	Wisconsin State Line	302	143	144	15
		SUBTOTALS:	20,661	10,385	4,659	5,6
		GRAND TOTALS:	20,661		EACH	I

FILE NAME: S:\Ss\Contra

USER NAME = David Gonzalez2	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 102.5253 / in.	CHECKED -	REVISED -
PLOT DATE = 3/14/2023	DATE -	REVISED -

										RTE	
RAISED	REFL	ECTIVE	PA	AVEINE	NT	MARKE	R RI	EPLACEMENT	LOCATIONS		D1
										1	
SCALE:		SHEET	4	OF	4	SHEETS	STA	TO	) STA		

E.	SEC <sup>-</sup>	TION		COUNTY	SHEETS	NO.
	D1 REFLECTO	R REPL	24-09	MCHENRY	4	4
				CONTRACT	NO. 46	5627
		ILLINOIS	FED. A	ID PROJECT		