


# SUMMARY OF QUANTITIES

**LOCAL AGENCY CONTACT INFORMATION**  
 VILLAGE OF WHEELING - 847.459.2600  
 CITY OF PROSPECT HEIGHTS - 847.398.6700

**PROJECT PERMIT LOG**  
 NPDES # \_\_\_\_\_  
 IDOT # \_\_\_\_\_  
 VILLAGE PERMIT # \_\_\_\_\_  
 CITY PERMIT # \_\_\_\_\_

ITEM NO.	DESCRIPTION	UNIT	TOTAL QUANTITY
<b>BASE BID</b>			
AR108108	1/C #8 SKV LUG CABLE	LF	16,000
AR109341	20 KW REFL ATOR STYLE 1	EACH	1
AR110202	2" PVC DUCT, DIRECT BURY	LF	11,110
AR110212	2" STEEL DUCT, DIRECT BURY	LF	370
AR110312	2" STEEL DUCT, JACKED	LF	186
AR110804	4-MAY CONCRETE ENCASED DUCT	LF	240
AR110010	ELECTRICAL HANDHOLE	EACH	6
AR110906	REMOVE ELECTRICAL HANDHOLE	EACH	5
AR123415	MILT. BASE MOUNTED	EACH	120
AR123443	TAXI GUIDANCE SIGN, 3 CHARACTER	EACH	1
AR123444	TAXI GUIDANCE SIGN, 4 CHARACTER	EACH	10
AR123445	TAXI GUIDANCE SIGN, 5 CHARACTER	EACH	2
AR123470	MODIFY EXISTING SIGN PANE	EACH	1
AR123510	MIR. BASE MOUNTED	EACH	1
AR123565	SPICE CAN	EACH	1
AR123901	REMOVE STAKE MOUNTED LIGHT	EACH	58
AR123902	REMOVE BASE MOUNTED LIGHT	EACH	35
AR123904	REMOVE TAXI GUIDANCE SIGN	EACH	6
AR123942	ADJUST BASE MOUNTED LIGHT	EACH	17
AR123964	RELOCATE TAXI GUIDANCE SIGN	EACH	4
AR130510	ENGINEERS FIELD OFFICE	LS	1
AR132410	UNCLASSIFIED EXCAVATION	CY	14,195
AR132540	SOIL STABILIZATION FABRIC	SY	6,515
AR136510	SILT FENCE	LF	6,762
AR136511	DITCH CHECK	EACH	4
AR136520	INLET PROTECTION	EACH	28
AR162306	CLASS FENCE 6"	LF	435
AR162900	REMOVE CLASS FENCE	LF	506
AR162905	REMOVE GATE	EACH	1
AR162908	REMOVE ELECTRIC GATE	EACH	1
AR163520	CONSTRUCTION FENCE	LF	455
AR208515	POROUS GRANULAR EMBANKMENT	CY	2,175
AR209606	CRUSHED AGG. BASE COURSE - 6"	SY	7,515
AR209608	CRUSHED AGG. BASE COURSE - 8"	SY	1,140
AR401610	BITUMINOUS SURFACE COURSE	TON	1,740
AR401620	BIT. SURFACE COURSE, LEVELING	TON	239
AR401650	BITUMINOUS PAVEMENT MILLING	SY	4,847
AR401655	BUTT JOINT CONSTRUCTION	SY	2,722
AR401900	REMOVE BITUMINOUS PAVEMENT	SY	18,087
AR401910	REMOVE & REPLACE BIT. PAVEMENT	SY	50
AR403610	BITUMINOUS BASE COURSE	TON	2,275
AR501510	10" PCC PAVEMENT	SY	5,700
AR501530	PCC TEST BATCH	EACH	1
AR501900	REMOVE PCC PAVEMENT	SY	3,092
AR602510	BITUMINOUS PRIME COAT	GAL	1,110
AR603510	BITUMINOUS TACK COAT	GAL	3,580
AR620520	PAVEMENT MARKING - WATERBORNE	SF	12,505
AR620525	PAVEMENT MARKING - BLACK BORDER	SF	14,705
AR620900	PAVEMENT MARKING REMOVAL	SF	3,550
AR701512	12" RCP CLASS IV	LF	518
AR701515	15" RCP CLASS IV	LF	678
AR701900	REMOVE PIPE	LF	1,629
AR705526	6" PERFORATED UNDERDRAIN W/ SOCK	LF	2,140
AR705900	REMOVE UNDERDRAIN	LF	490
AR731412	INLET - TYPE B	EACH	4
AR731540	MANHOLE #	EACH	7
AR731900	REMOVE INLET	EACH	2
AR731903	REMOVE MANHOLE	EACH	8
AR731940	ADJUST INLET	EACH	4
AR731943	ADJUST MANHOLE	EACH	5
AR734410	COMB. CONCRETE CURB & GUTTER	LF	690
AR766508	8" DUCTILE IRON WATER MAIN	LF	50
AR760724	24" STEEL GASING	LF	22
AR800015	REPLACE BENCHMARK	EACH	1
AR800026	SLOPE BOX INLET 12"	EACH	4
AR800053	SOIL GUARD	SY	9,174
AR800153	CONCRETE WASHOUT	LS	1
AR800154	REMOVE WOODEN TAXI GUIDANCE SIGN	EACH	5
AR800194	REMOVE ELEVATED RETROREFLECTIVE MARKER	EACH	25
AR800816	L-804 RFL ELEVATED, BASE MOUNTED	EACH	8
AR901510	SEEDING	ACRE	10.9
AR908510	MULCHING	ACRE	9.0
AR910915	REMOVE ROADWAY SIGN	EACH	7

ITEM NO.	DESCRIPTION	UNIT	TOTAL QUANTITY
<b>ADDITIVE ALTERNATE #1 - OVERLAY TAXIWAY BRAVO</b>			
AS401610	BITUMINOUS SURFACE COURSE	TON	480
AS401655	BUTT JOINT CONSTRUCTION	SY	360
AS603510	BITUMINOUS TACK COAT	GAL	615
AS620520	PAVEMENT MARKING - WATERBORNE	SF	2,610
AS620525	PAVEMENT MARKING - BLACK BORDER	SF	3,516
<b>ADDITIVE ALTERNATE #2 - ALCMS SYSTEM AND SPARE REGULATOR</b>			
A1109362	30 KW REFL ATOR STYLE 2	EACH	1
A1109630	LIGHTING CONTROL COMPUTER SYSTEM	LS	1
A1800178	FIBER OPTIC CABLE	LF	180

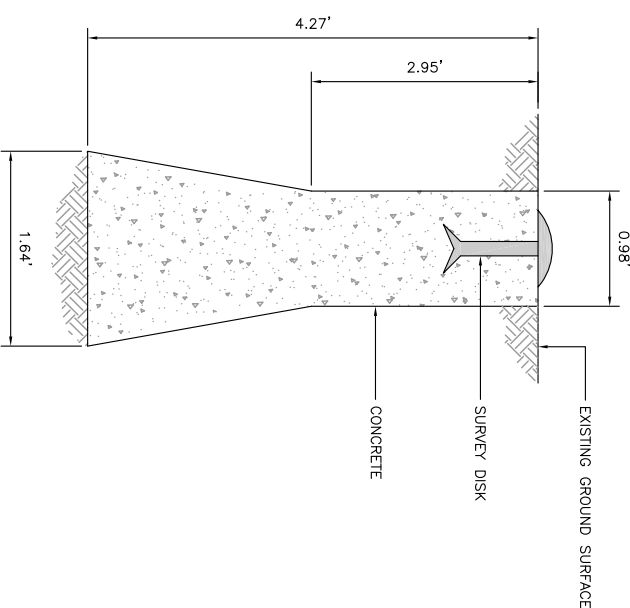

**NEW BENCHMARK DETAIL**  
 NOT TO SCALE

K:\Chicagoexec\0829008\_Taxi Way Sheets\Taskmg  
 FILE: txy-SOQ.dwg  
 LAYOUT: Layout1  
 UPDATE BY: mkatz  
 SURVEY BOOK # \_\_\_\_\_  
 DATE: Tue 4/5/11 3:07pm  
 XREF DWG: tb.dwg  
 tbcint.dwg  
 tbcint\_txy.dwg

REVISIONS	BY	DATE
1	MLK	03/31/10

0 1 2  
 THIS BAR IS EQUAL TO 2"  
 AT FULL SCALE (34X22).

## CHICAGO EXECUTIVE AIRPORT WHEELING/PROSPECT HEIGHTS, ILLINOIS CONSTRUCT PARTIAL PARALLEL TAXIWAY ECHO AND PARTIAL OVERLAY OF TAXIWAY ECHO

## SUMMARY OF QUANTITIES

© Copyright CMT, Inc.

**CMT**  
 CRAWFORD, MURPHY & TILLY, INC.  
 CONSULTING ENGINEERS  
 License No. 184-000613



DESIGN BY:	MLK
DRAWN BY:	JRO
CHECKED BY:	MLK
APPROVED BY:	DLP
DATE:	04/22/11
JOB No:	08290-08

ILLINOIS PROJECT: PWK-3244  
 A.I.P. PROJECT: 3-17-0018-B32  
 SHEET 2 OF 49 SHEETS