




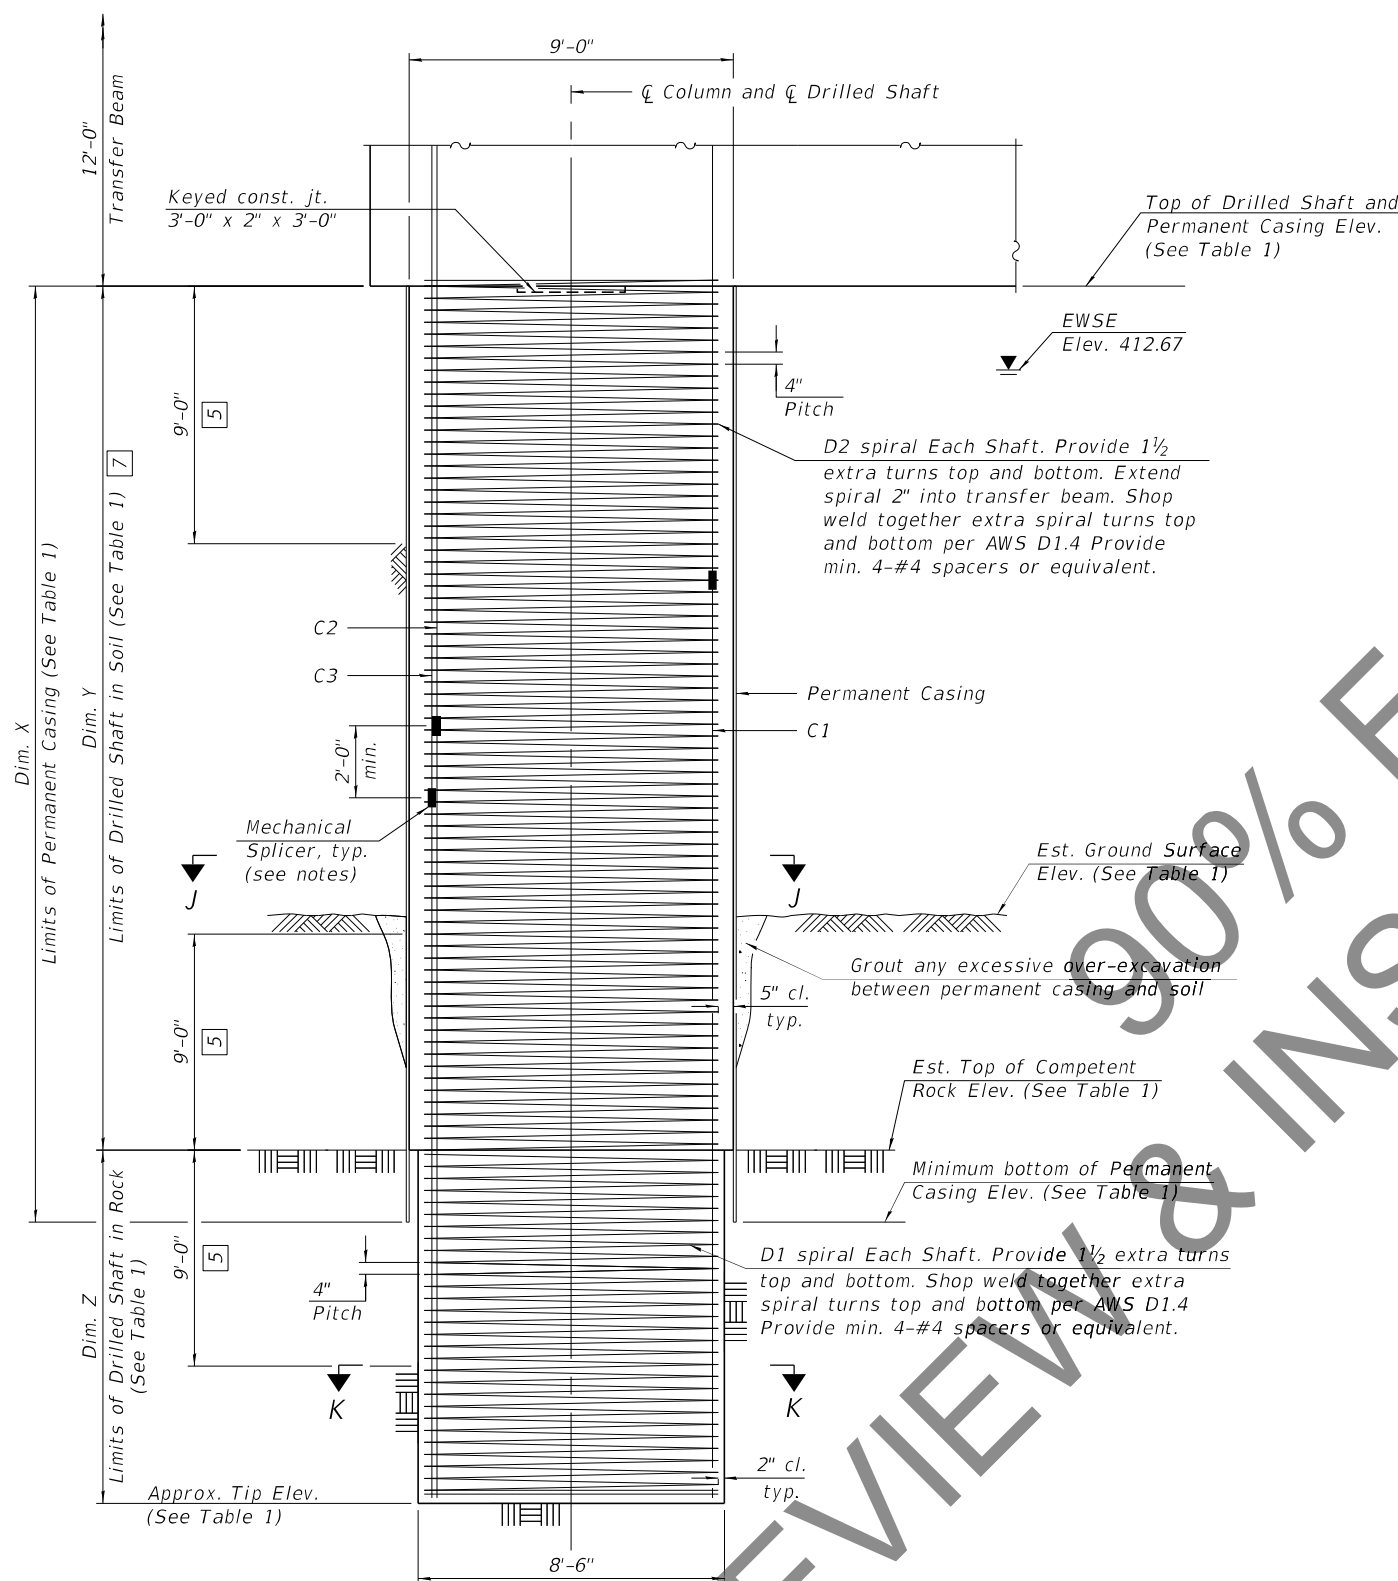

DRILLED SHAFT DETAIL
(One shaft shown, three shafts required,
one under each column)

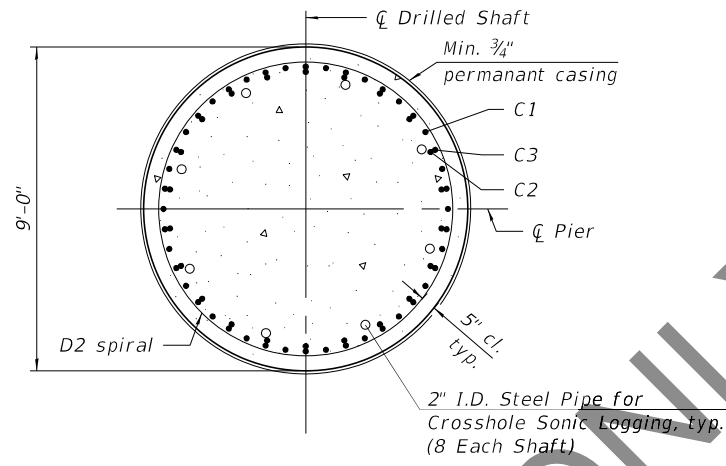

SECTION J-J

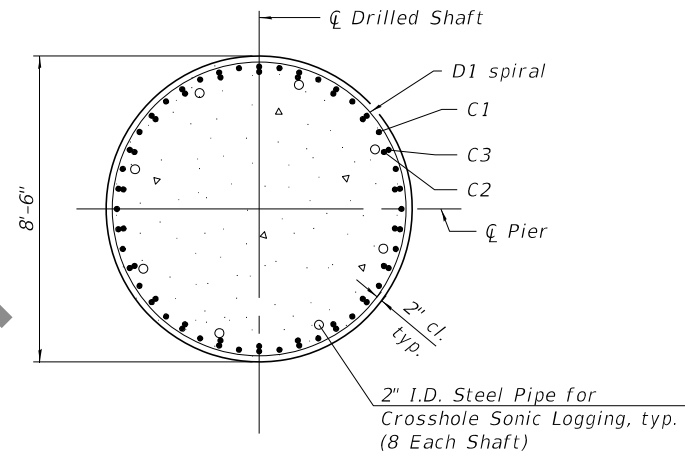

SECTION K-K

- 5 No splicing of bars allowed in this region.
- 7 If the prevailing water surface elevation during construction is consistently different than estimated on the plans, the contractor may propose an adjustment to the top of the drilled shaft elevation as part of their installation procedure. The top of all drilled shafts within a substructure unit shall be constructed to the same elevation and extend above the prevailing water surface. The quantities and reinforcement detailing are based on the top of shaft and the estimated elevations shown and may change based on the actual elevations encountered at each shaft and the final top of shaft elevation.

Notes:
The Contractor may propose a construction joint in the drilled shaft so separate pours can be made, if the shaft can be poured in the dry, subject to approval from the Engineer.
The Permanent Casing is shown embedded 2 ft. into rock for estimate of quantities. Pay Limits for the Permanent Casing shall be based on the minimum length shown.
Alternate every other Mechanical Splicer 2'-0" min.
When splicing of spiral reinforcement is necessary, the spirals shall be provided with 1 1/2 extra turns at the ends to be spliced. These additional turns shall either be welded together according to AWS D1.4, or shall both terminate with a 135° standard hook.
The Contractor is responsible for determining the casing thickness and the actual tip elevation to be used. See Article 516.06(d) of the Standard Specifications. Pay limits for the Permanent Casing shall be based on minimum length shown.
Wet construction methods within the permanent casing may be required. The Contractor's installation procedure shall clearly address cleaning and inspection methods proposed for use with wet construction methods which ensure adequate end bearing on rock is achieved.
For Top Plan and Part elevation, see sheet 199 of 292.
For Transfer Beam details, see sheet 200 of 292.
For additional notes, bar details, and Bill of Material, see sheets 203 and 204 of 292.
For Table 1, see sheet 202 of 292.
For Mechanical Splicer details, see sheet 248 of 292.

MODEL: Default
FILE NAME: C:\C54PDF\920445087_5011060-0350-D876J90-bua-34aPPE.dgn
9/11/2021 5:01:56 PM

Teaming with:

USER NAME =	DESIGNED - UVK	REVISED -
PLOT SCALE =	CHECKED - BTF	REVISED -
PLOT DATE =	DRAWN - EAT	REVISED -
	CHECKED - SSM	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 9 PLAN AND ELEVATION - 3
STRUCTURE NO. 060-0350 (EB)


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	401
			CONTRACT NO. 76J90	

TABLE 1

		Pier 9
☒ Pier Station		1797+59.97
Bearing Seat Elevation	Girder 1	452.44
	Girder 2	452.65
	Girder 3	452.80
	Girder 4	452.58
	Girder 5	452.37
	Girder 7	452.15
Top of Cap Elevation		452.15
Bottom of Cap Elevation		444.15
Column Height		17'-1¾"
Top of Shaft Elevation		415.00
Approx. Tip Elevation		347.40
Est. Ground Surface Elevation		377.80
Est. Top of Rock Elevation		372.90
Min. bott. of Permanent Casing Elev.		370.90
Dim. X		44'-1¼"
Dim. Y		42'-1¼"
Dim. Z		25'-6"

PIER 9

Mark	Bar Callouts
(1)	43 sets of 1-#6 s901(E) and 1-#6 s905(E) at 5" cts.
(2)	14 sets of 2-#6 s902(E) at 6" cts.
(3)	6 sets of 4-#6 s907(E) at 5" cts.
(4)	48-#6 s908(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s903(E) and 2-#6 s906(E) at 6" cts.
(6)	17 sets of 2-#6 s904(E) at 6" cts
(7)	18 sets of 2-#6 s904(E) at 6" cts.
(8)	14-#7 hp902(E) hoops at 3" cts.
(9)	44-#7 hp902(E) hoops at 3" cts.
(10)	33-#7 hp901(E) hoops at 4" cts.
T1	2 layers of 13-#11 p901(E) or p902(E) at 7¾" cts.
T2	14 bundles of 1-#11 p905(E) and 1-#11 p906(E) at 12" max.
B1	2 layers of 13-#11 p903(E) at 7¾" cts.
B2	13-#7 p904(E) at 7¾" cts.
B3	14 bundles of 1-#11 p905(E) and 1-#11 p906(E) at 12" max.
H1	10-#8 h901(E) at 7½" cts.
H2	18-#9 h902(E) at 7" cts.
H3	13-#6 h903(E) at abt. 7¾" cts.
H4	13-#6 h904(E) at abt. 7¾" cts.
A1	6 sets of 1-#7 u903(E) and 1-#7 u904(E) at 10½" cts.
A2	10-#7 u905(E) at 10¾" cts.
U1	11-#8 u901(E) spaced with h901(E) and p901(E)
U2	20-#9 u902(E) splice with h902(E) and space with p905(E)
C1	22 sets of 1-#14 v901(E) and 1-#14 v902(E) (top)
C2	22 sets of 1-#14 v903(E) and 1-#14 v904(E) (top) Bundle w/ C3
C3	22 sets of 1-#14 v905(E) and 1-#14 v906(E) (top) Bundle w/ C2
C4	40-#11 v907(E) equally spaced
D1	#7 sp901(E) at 4" pitch
D2	#7 sp902(E) at 4" pitch
D3	#7 sp903(E) at 3" pitch
K1	18-#5 s909(E) spaced at 6" cts.
K2	3-#5 h905(E) spaced with n901(E)
K3	1-#5 h905(E) each face
K4	2-#5 h906(E) each face
K5	3-#5 n901(E) at 12" cts., each face
R1	#5 r901(E)

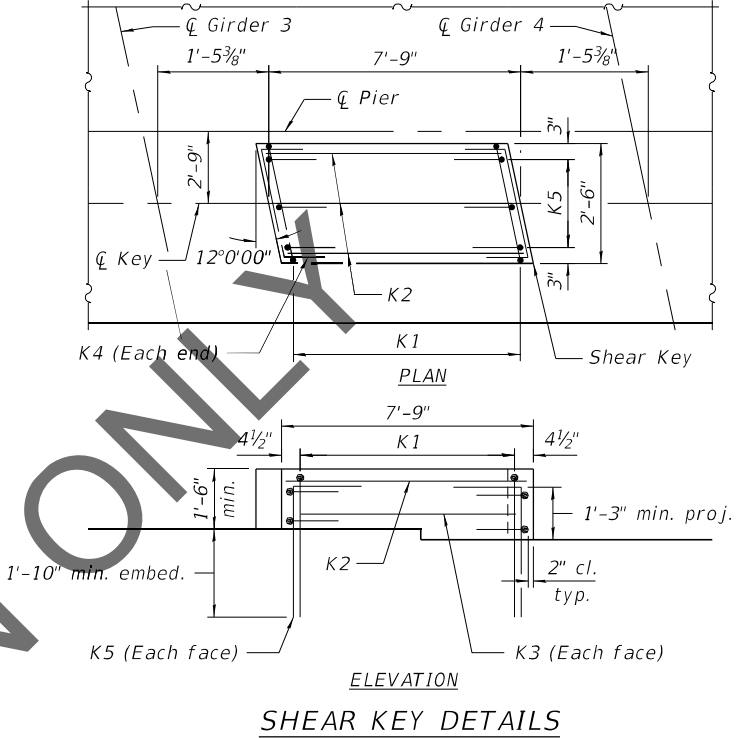

MODEL: Default
FILE NAME: C:\JCS4PDF\914945087_502\060-0350-D876\90-bua-35aPRT.dgn
9/10/2021 1:42:32 PM

Teaming with:


USER NAME =	DESIGNED - UVK	REVISED -
	CHECKED - BTF	REVISED -
PLOT SCALE =	DRAWN - EAT	REVISED -
PLOT DATE =	CHECKED - SSM	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 9 REINFORCEMENT TABLES – 1
STRUCTURE NO. 060-0350 (EB)


SHEET 202 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	402
		CONTRACT NO. 76J90		
		ILLINOIS FED. AID PROJECT		

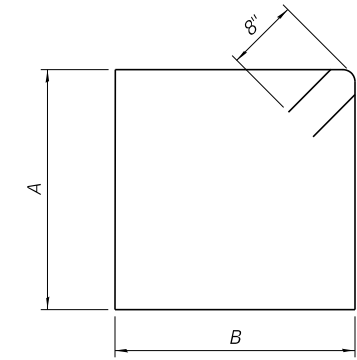


BARS *s901(E)* & *s903(E)*

Bars	A	B
<i>s901(E)</i>	7'-8"	7'-8"
<i>s903(E)</i>	11'-8"	9'-4"




BARS *s902(E)* & *s904(E)* & *s907(E)*

Bars	A	B
<i>s902(E)</i>	7'-8"	5'-10"
<i>s904(E)</i>	11'-8"	6'-8"
<i>s907(E)</i>	4'-10"	5'-10"




BARS *s905(E)* & *s906(E)*

Bars	A
<i>s905(E)</i>	7'-8"
<i>s906(E)</i>	11'-8"

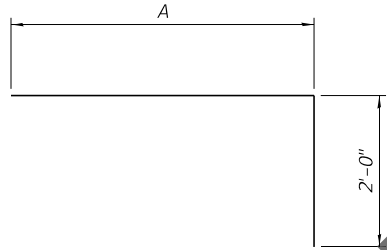


BARS *p901(E)* & *p902(E)*

Bars	A
<i>p901(E)</i>	22'-5"
<i>p902(E)</i>	51'-0"

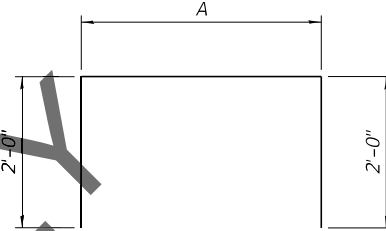


BARS *p905(E)* & *p906(E)*

Bars	A
<i>p905(E)</i>	54'-0"
<i>p906(E)</i>	53'-6"




BARS *u903(E)*

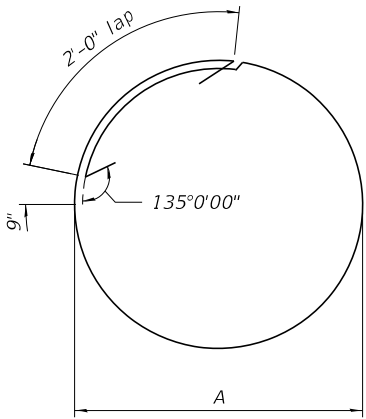


BARS *hp901(E)* & *hp902(E)*

Bars	A
<i>hp901(E)</i>	8'-2"
<i>hp902(E)</i>	6'-8"




BARS *u901(E)* & *u902(E)*

Bars	A	B	C	R
<i>u901(E)</i>	5'-4"	11'-9 ³ / ₈ "	5'-4"	3'-9"
<i>u902(E)</i>	5'-9"	14'-5"	7'-9"	4'-7"




BARS *u905(E)* & *s908(E)*


Bars	A	B
<i>u905(E)</i>	11'-6"	4'-7"
<i>s908(E)</i>	7'-8"	2'-9"




BARS *s909(E)*




BARS *h906(E)*



BARS *n901(E)*



BARS *u904(E)*



BARS *r901(E)*

MODEL: Default
FILE NAME: C:\CIS4PDF\9293\45087_503\060-0350-087\90-bua-36aPRT.dgn

PIER 9
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h901(E)	20	#8	56'-0"	————
h902(E)	36	#9	38'-0"	————
h903(E)	13	#6	31'-8"	————
h904(E)	13	#6	10'-4"	————
h905(E)	5	#5	7'-5"	————
h906(E)	4	#5	3'-9"	┐┌
hp901(E)	99	#7	29'-2"	○
hp902(E)	174	#7	24'-5"	○
n901(E)	6	#5	4'-0"	┐
p901(E)	26	#11	24'-5"	┐
p902(E)	26	#11	53'-0"	┐
p903(E)	26	#11	57'-8"	————
p904(E)	26	#7	3'-0"	————
p905(E)	28	#11	58'-0"	┐
p906(E)	28	#11	57'-6"	┐
r901(E)	8	#5	5'-4"	┐
s901(E)	86	#6	32'-0"	┐
s902(E)	84	#6	19'-4"	┐
s903(E)	66	#6	43'-4"	┐
s904(E)	104	#6	25'-0"	┐
s905(E)	86	#6	9'-4"	┐
s906(E)	132	#6	13'-4"	┐
s907(E)	48	#6	16'-6"	┐
s908(E)	48	#6	13'-2"	┐
s909(E)	18	#5	8'-6"	┐
** sp901(E)	3	#7	25'-4"	〰〰〰
** sp902(E)	3	#7	42'-3"	〰〰〰
** sp903(E)	3	#7	17'-6"	〰〰〰
u901(E)	22	#8	22'-5"	┐
u902(E)	40	#9	27'-11"	┐
u903(E)	12	#7	6'-9"	┐
u904(E)	12	#7	6'-10"	┐
u905(E)	20	#7	20'-8"	┐
v901(E)	66	#14	45'-0"	————
v902(E)	66	#14	33'-10"	————
v903(E)	66	#14	42'-6"	————
v904(E)	66	#14	36'-4"	————
v905(E)	66	#14	40'-0"	————
v906(E)	66	#14	38'-10"	————
v907(E)	120	#11	36'-1"	————

** Length is height of spiral.


PIER 9
BILL OF MATERIAL (CONT.)

Concrete Structures	Cu. Yd.	482.9
Reinforcement Bars, Epoxy Coated	Pound	269,680
Permanent Casing	Foot	133
Drilled Shaft in Soil	Cu. Yd.	298
Drilled Shaft in Rock	Cu. Yd.	161
Crosshole Sonic Logging Access Ducts	Foot	203
Crosshole Sonic Logging Testing	Each	3
Thermal Integrity Profile Testing	Each	3
Thermal Integrity Profile Data Collection	Foot	203


90% FOR REVIEW & INSPECTION ONLY

Note:
For bar details, see sheet 203 of 292.

MODEL: Default
FILE NAME: C:\C54PDF\F9252545087_625\060-0350-D876\90-bua-37aPBM.dgn
9/13/2021 1:34:04 PM

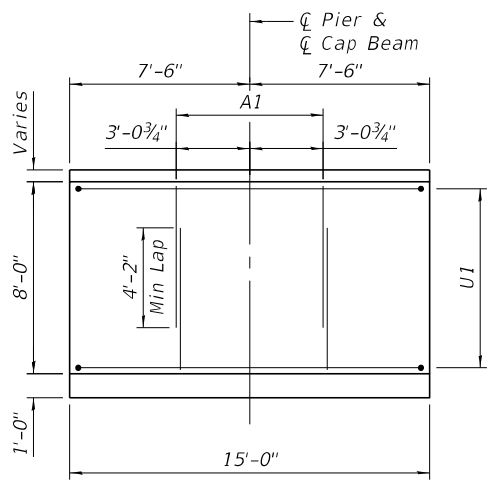


VIEW A-A
(T1 and (3) bars not shown for clarity)

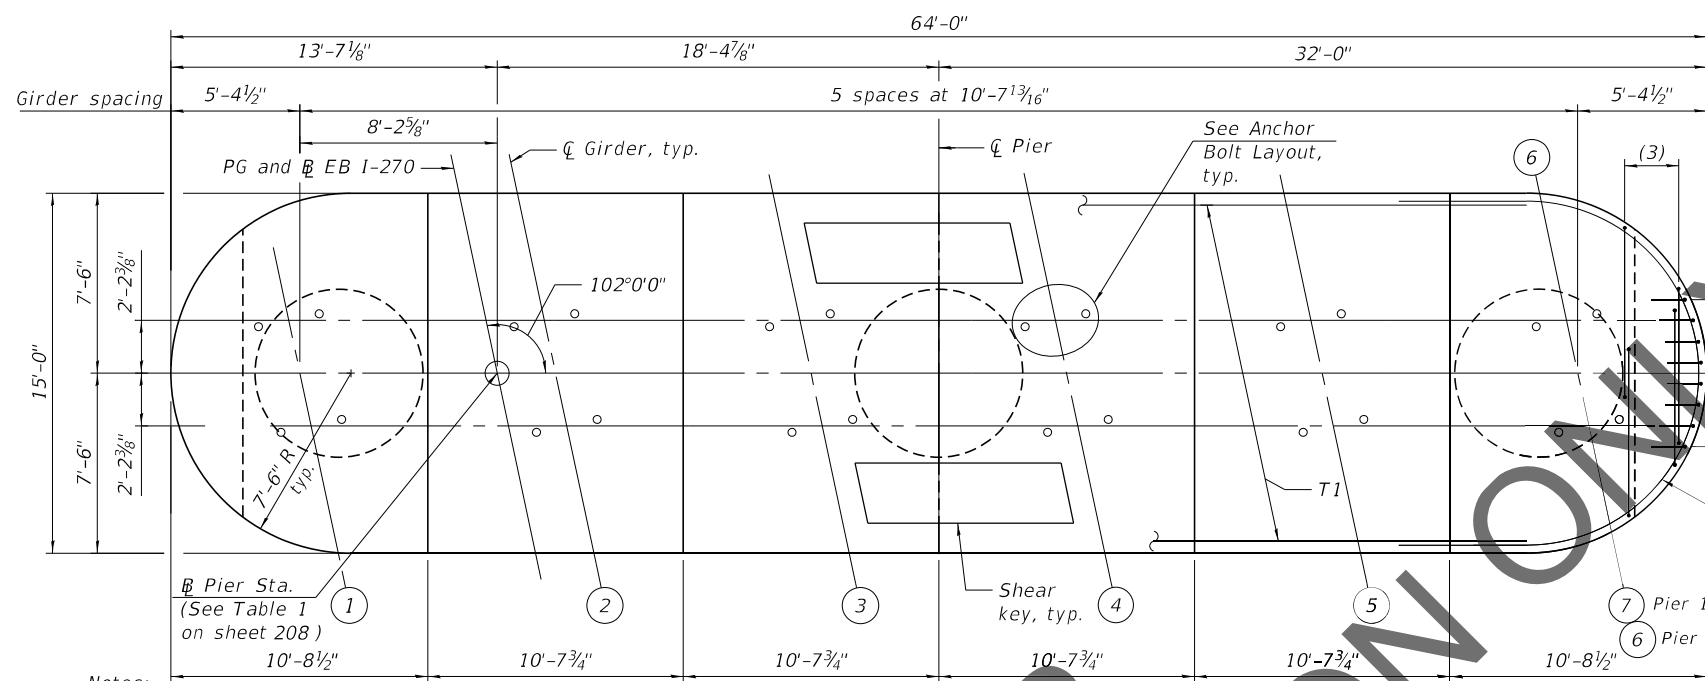


TOP PLAN


Notes:
Space reinforcement in cap to miss anchor bolts.
Pour steps monolithically with cap.

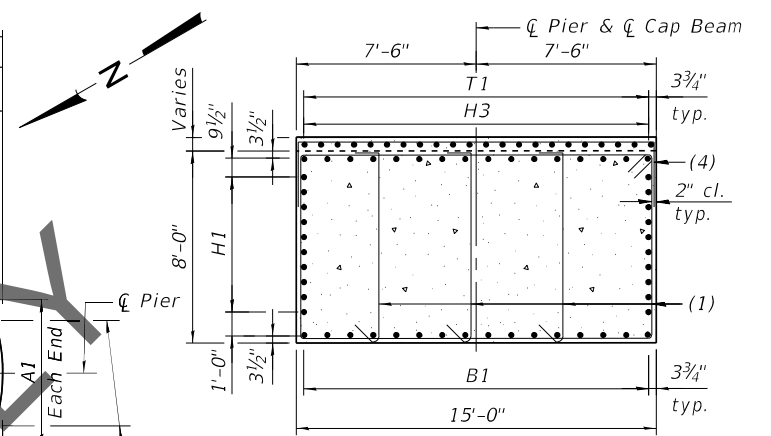


SECTION C-C

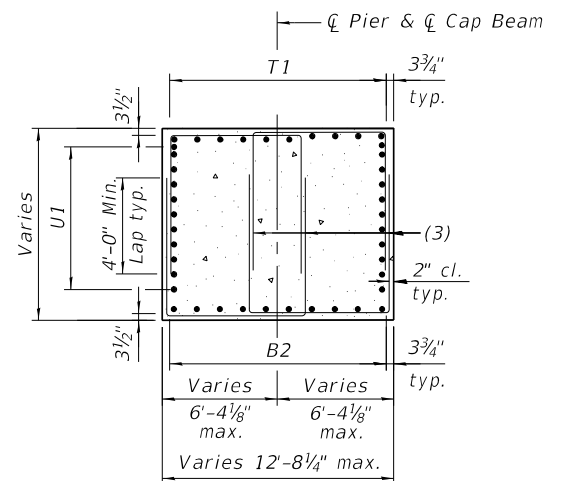


SECTION D-D

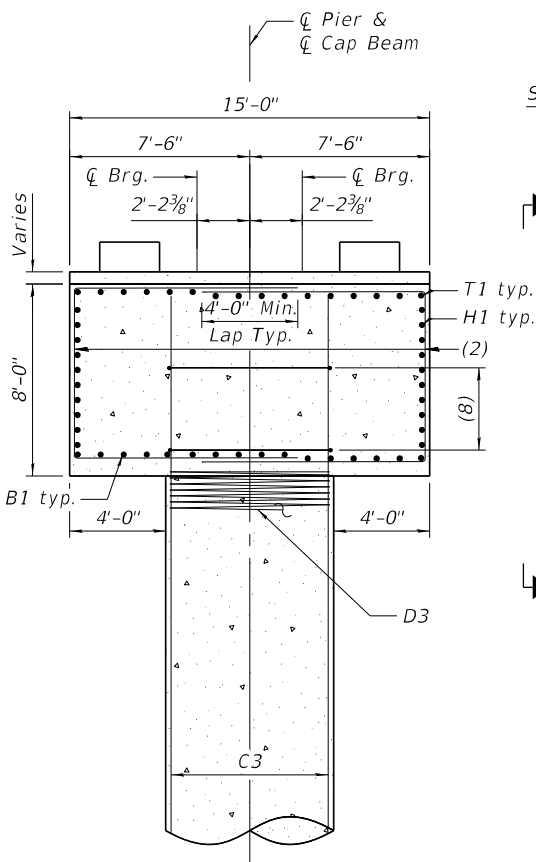

SECTION B-B

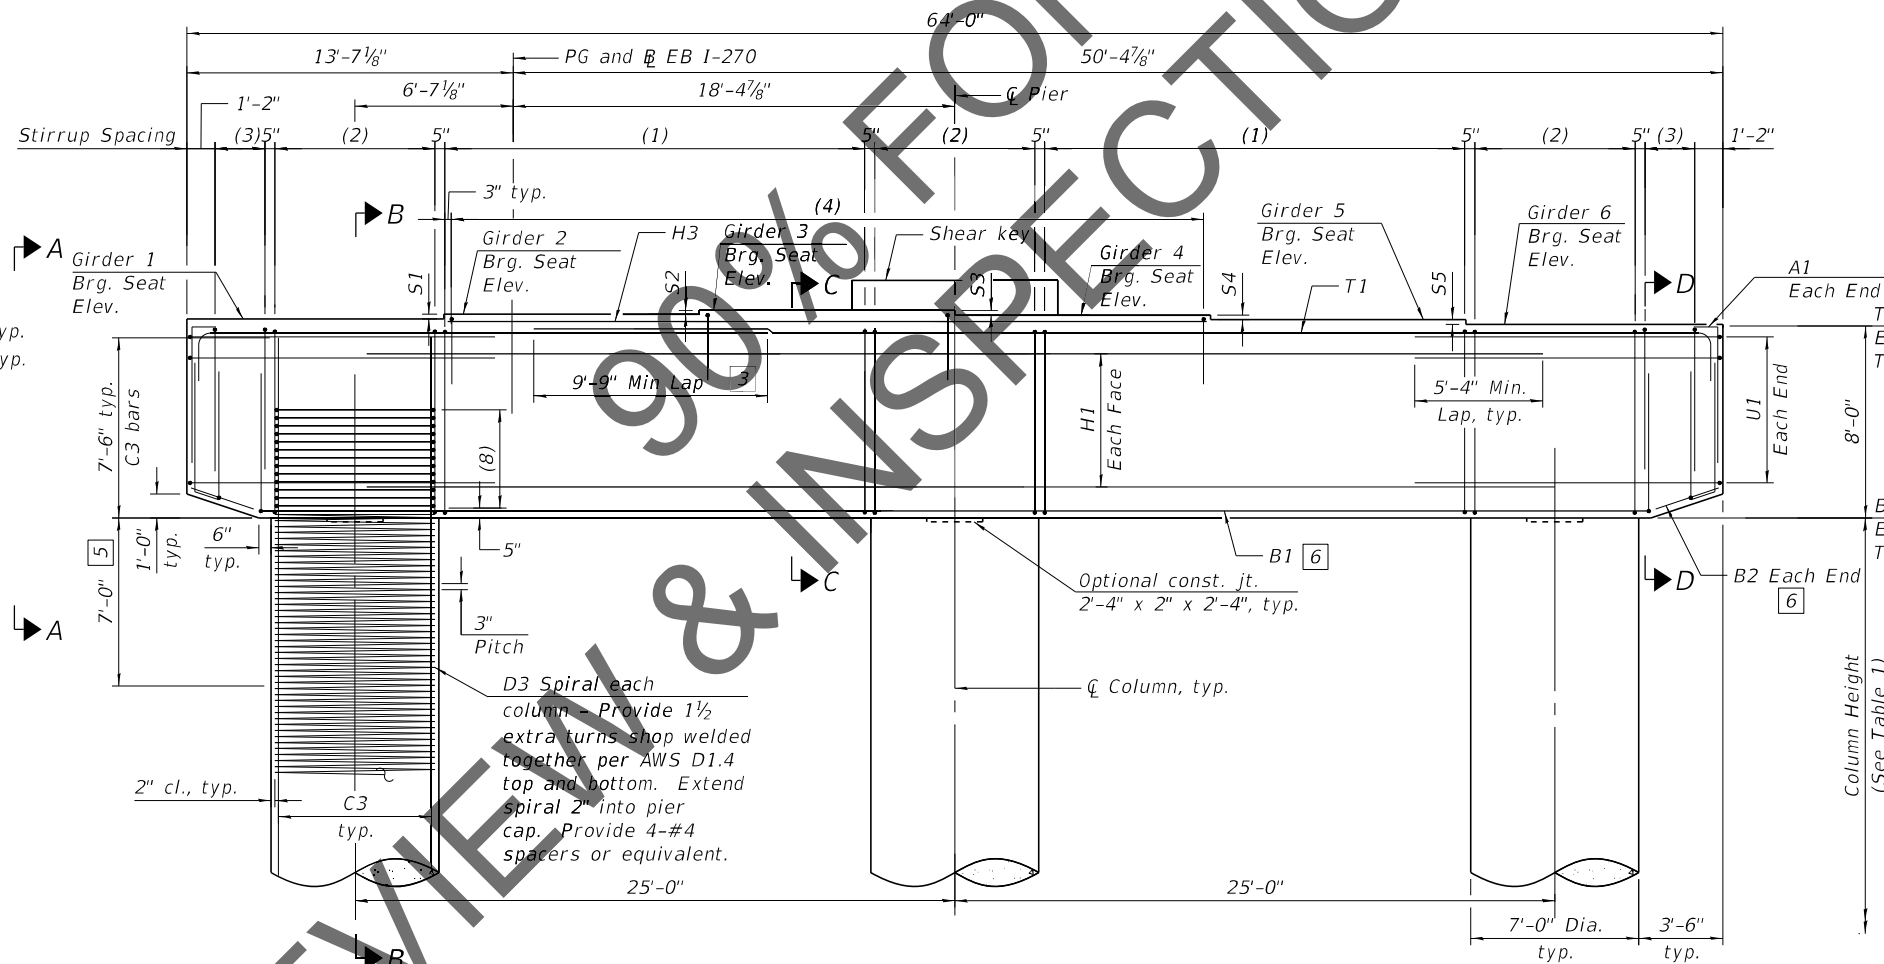

PART ELEVATION
(Looking East)

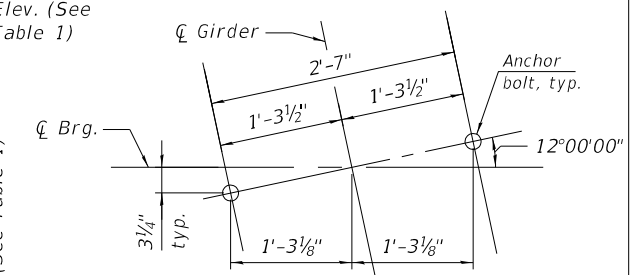


ANCHOR BOLTS LAYOUT

Notes:
For bar details and Bill of Materials see sheets 209 and 210 of 292.
For column height, step height and all elevations, See Table 1 on sheet 208 of 292.
For bar callouts and shear key details, see sheet 208 of 292.
For bearing details, Unit 2, see sheet 156 of 292.
For bearing details, Units 3 & 4, see sheet 159 of 292.


- [3] Alternate placement cap top rebars to stagger the laps
- [5] No splicing of bars allowed in this region.
- [6] Field cut bars when needed to keep 2" clear concrete cover.

USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	405
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

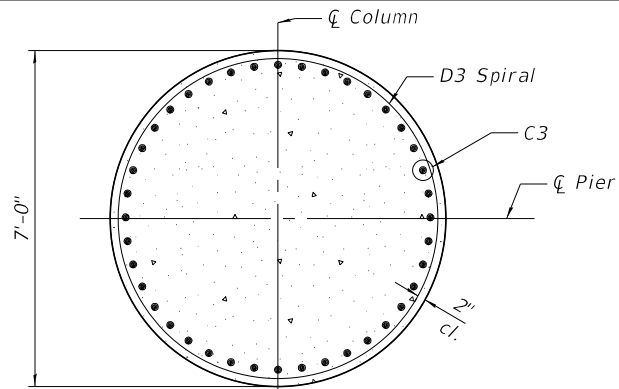


SECTION E-E

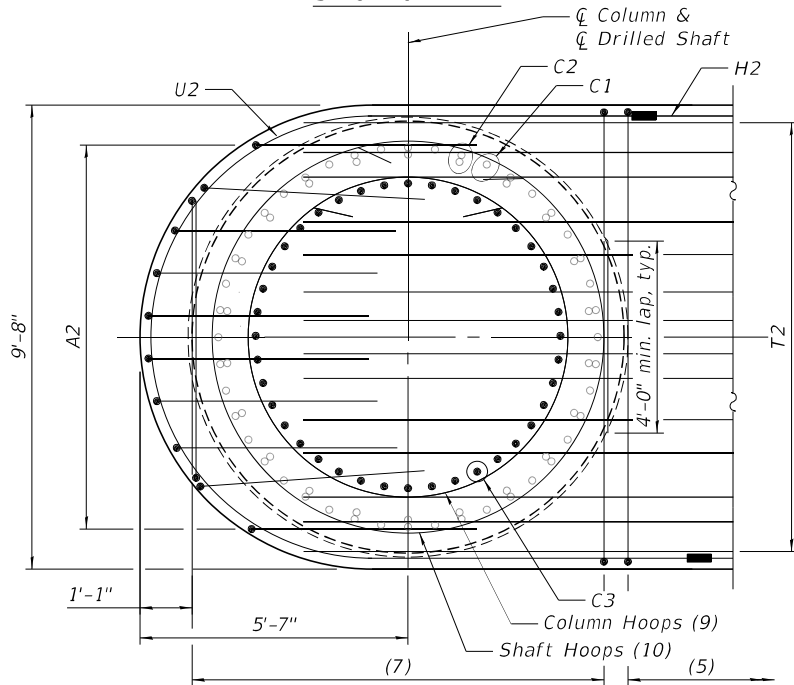


SECTION F-F

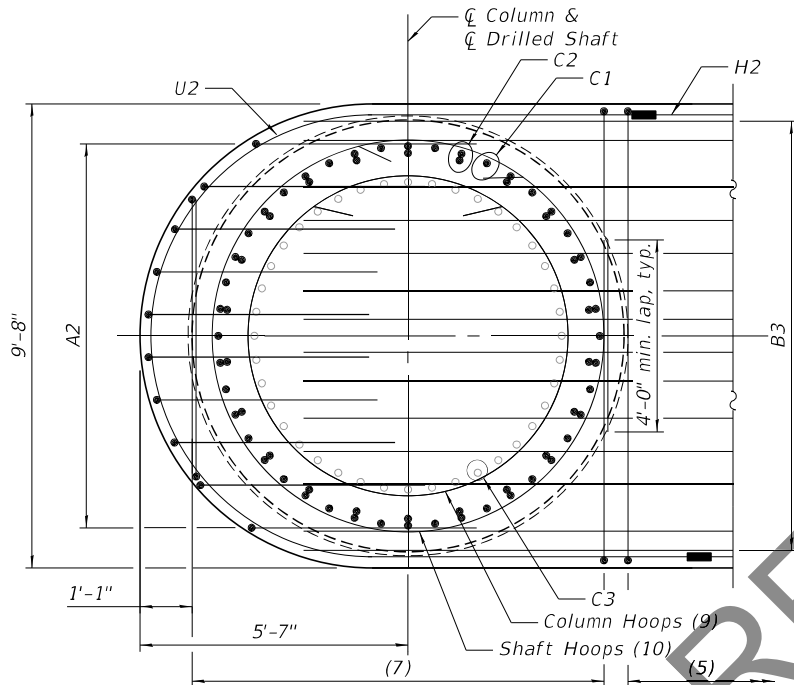


SECTION G-G

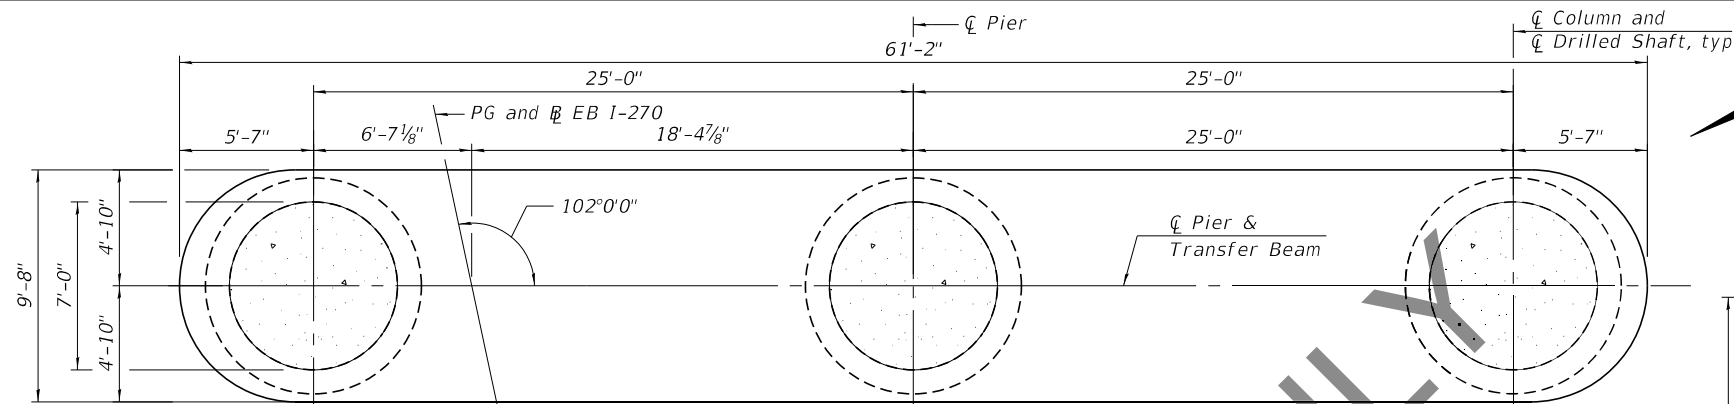

PLAN - TRANSFER BEAM

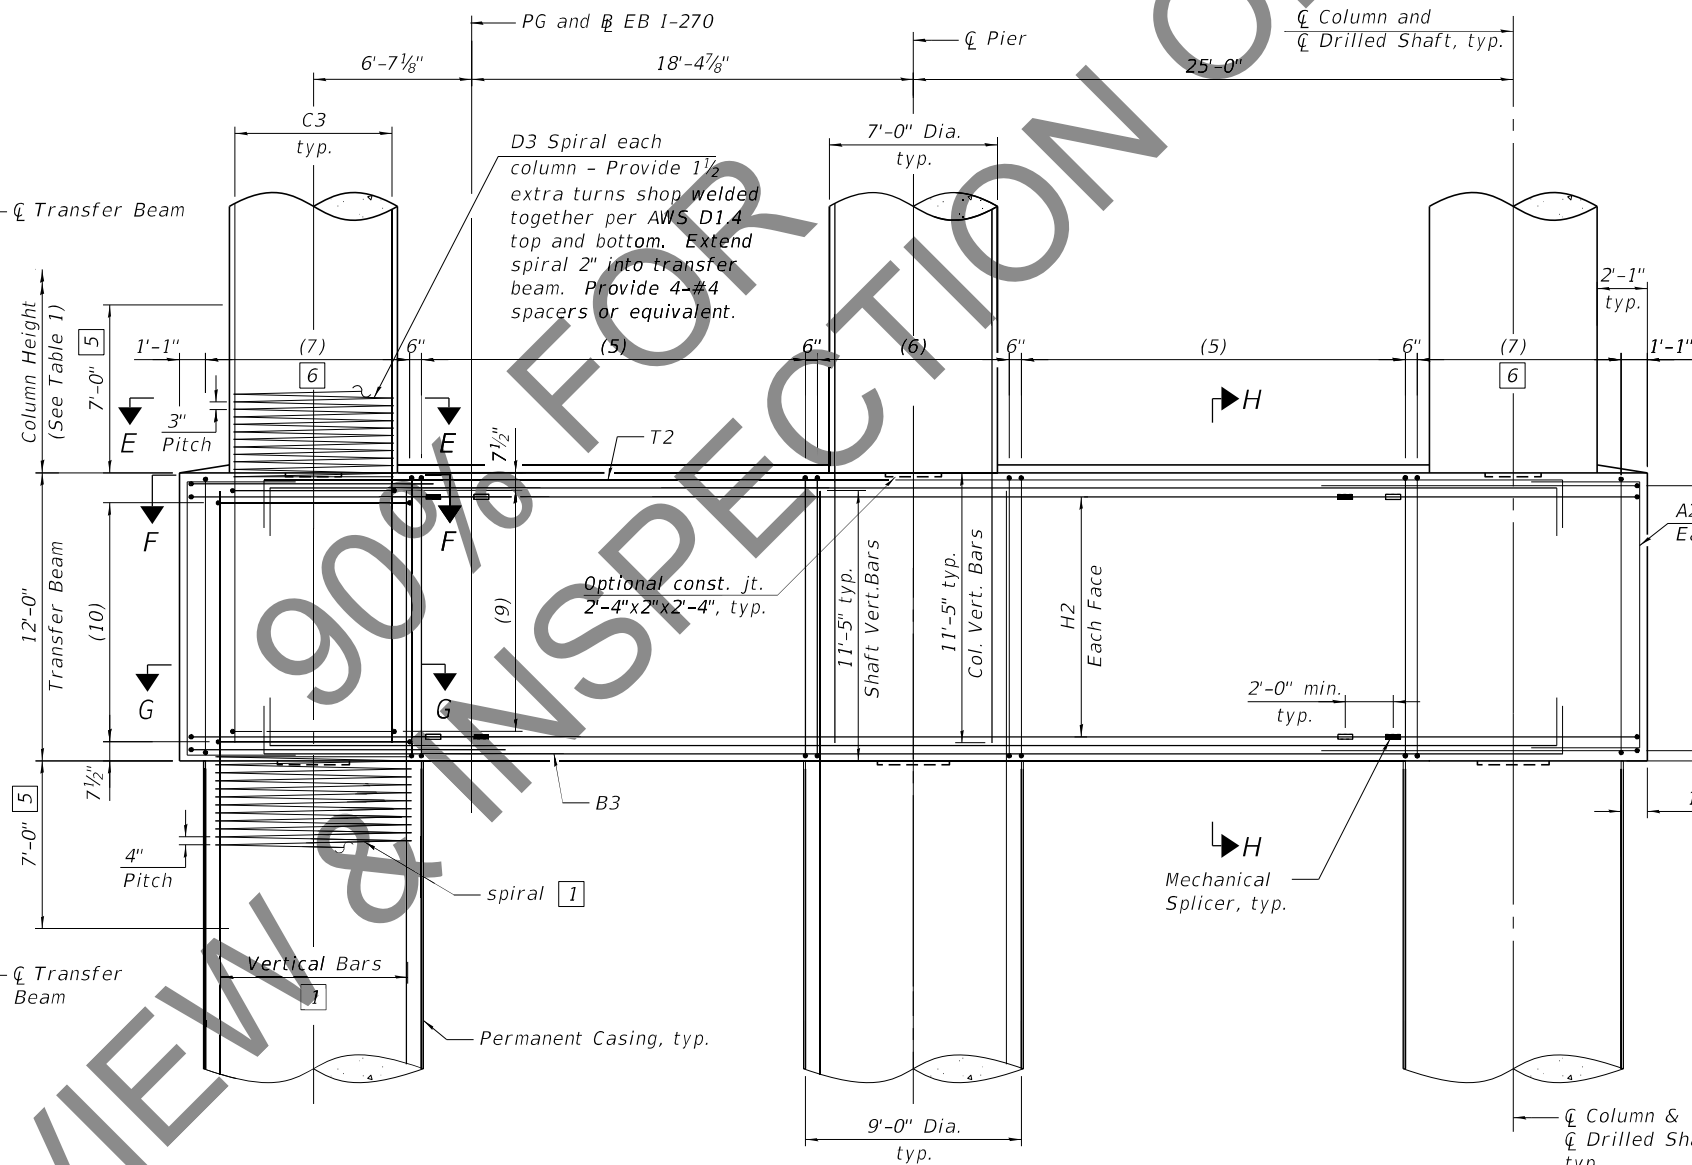

PART ELEVATION - TRANSFER BEAM
(Looking East)

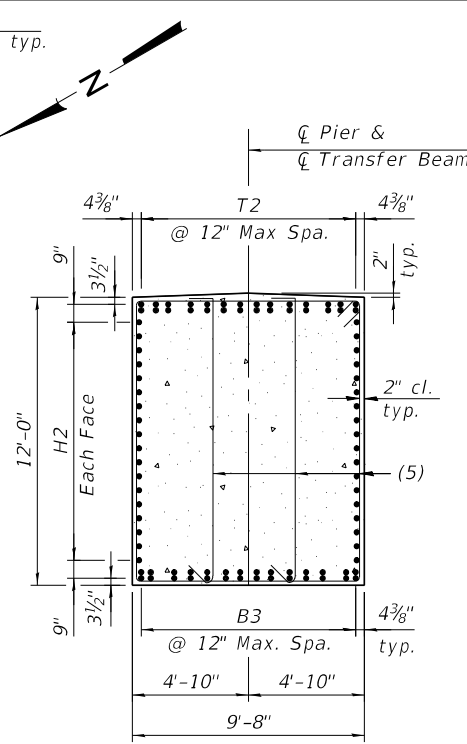

SECTION H-H


Design HWE
Elev. 433.4

Top of Drilled Shaft
Elev. (see Table 1)


EWSE Elev.
412.67

- 1 See sheet 207 of 292 for additional rebar placement.
- 2 Adjust transfer beam rebar slightly when conflict with column or shaft vertical bar.
- 5 No splicing of bars allowed in this region.
- 6 Field cut bars when needed to keep 2" clear concrete cover.


Notes:
For Top Plan and Part Elevation, see sheet 205 of 292.
For Drilled Shaft Details, see sheet 207 of 292.
For additional notes, bar details, and Bill of Material, see sheets 208, 202 and 210 of 292.
For Table 1, see sheet 208 of 292.
For Mechanical Splicer details, see sheet 248 of 292.

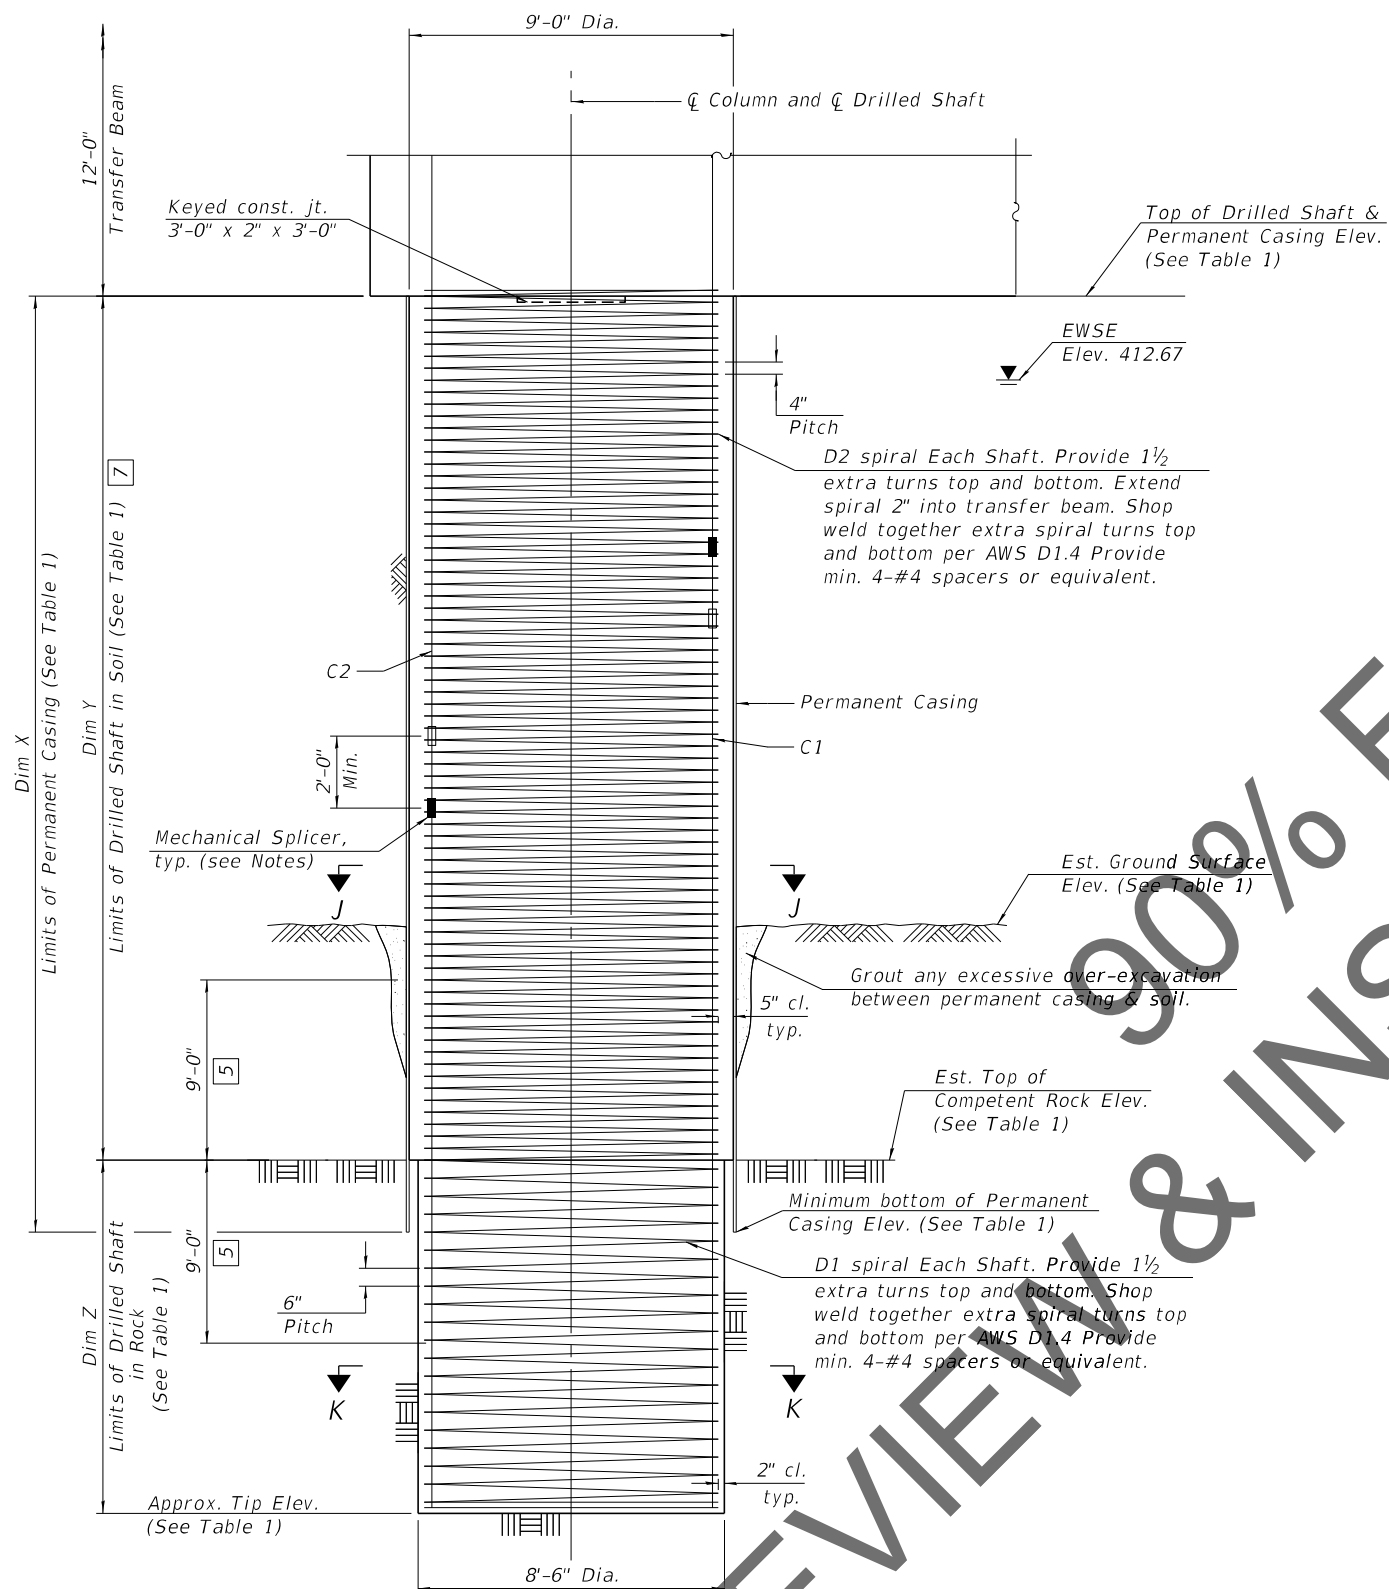

DRILLED SHAFT DETAIL
(One shaft shown, three shafts required, one under each column)

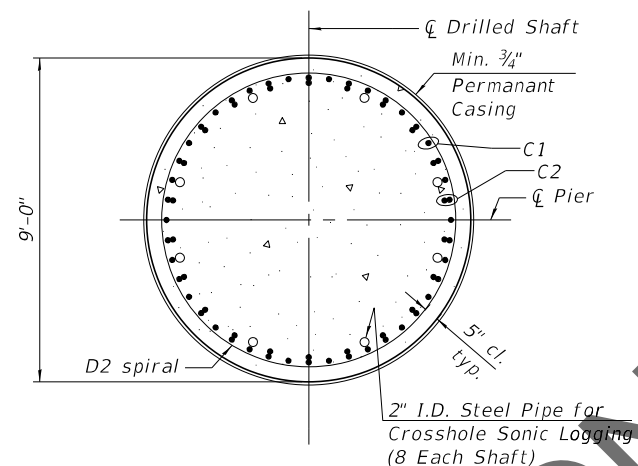

SECTION J-J

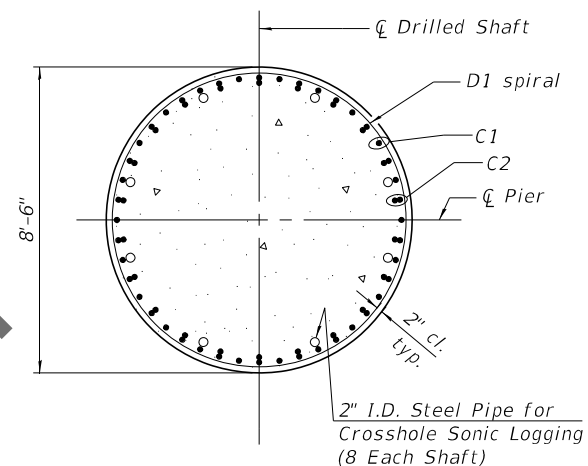

SECTION K-K

- 5 No splicing of bars allowed in this region.
- 7 If the prevailing water surface elevation during construction is consistently different than estimated on the plans, the contractor may propose an adjustment to the top of the drilled shaft elevation as part of their installation procedure. The top of all drilled shafts within a substructure unit shall be constructed to the same elevation and extend above the prevailing water surface. The quantities and reinforcement detailing are based on the top of shaft and the estimated elevations shown and may change based on the actual elevations encountered at each shaft and the final top of shaft elevation.

Notes:

For Pier Plan and Elevation, see Sheets 205 and 206 of 292.

For additional notes, bar details, and Bill of Materials, see sheets 209 and 210 of 292.

For Table 1, see sheet 208 of 292.

For Mechanical Splicer Details, see sheet 248 of 292.


The Contractor may propose a construction joint in the drilled shaft so separate pours can be made, if the shaft can be poured in the dry, subject to approval from the Engineer.

The Permanent Casing is shown embedded 2 ft. into rock for estimate of quantities. The Contractor is responsible for determining the casing thickness and the actual tip elevation to be used. See Article 516.06(d) of the Standard Specifications. Pay Limits for the Permanent Casing shall be based on the minimum length shown.

When splicing of spiral reinforcement is necessary, the spirals shall be provided with 1 ½ extra turns at the ends to be spliced. These additional turns shall either be welded together according to AWS D1.4, or shall both terminate with a 135° standard hook.

Alternate location of mechanical splices of C1 bars every other bar.


Alternate location of mechanical splices of C2 bars within each bundle.

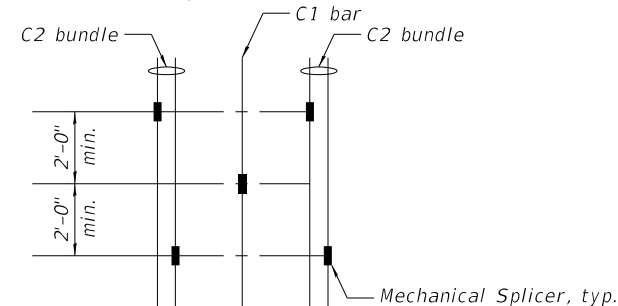

ALTERNATE MECHANICAL SPLICERS LOCATION


TABLE 1

		Pier 10	Pier 17
☒ Pier Station		1799+54.47	1815+23.47
Bearing Seat Elevation	Girder 1	454.09	452.94
	Girder 2	454.29	453.16
	Girder 3	454.45	453.35
	Girder 4	454.23	453.15
	Girder 5	454.01	452.96
Girder 6		453.79	452.76
Top of Cap Elevation		453.79	452.76
Bottom of Cap Elevation		445.79	444.76
Column Height		18'-9 ³ / ₈ "	17'-9"
Top of Shaft Elevation		415.00	415.00
Approx. Tip Elevation		343.50	320.80
Est. Ground Surface Elevation		370.90	391.60
Est. Top of Rock Elevation		369.00	346.30
Min. bottom of Permanent Casing Elevation		367.00	344.30
Dim X		48'-0"	70'-8 ³ / ₈ "
Dim Y		46'-0"	68'-8 ³ / ₈ "
Dim Z		25'-6"	25'-6"
S1		2 ³ / ₈ "	2 ⁵ / ₈ "
S2		1 ⁷ / ₈ "	2 ¹ / ₄ "
S3		2 ⁵ / ₈ "	2 ³ / ₈ "
S4		2 ⁵ / ₈ "	2 ³ / ₈ "
S5		2 ⁵ / ₈ "	2 ¹ / ₄ "

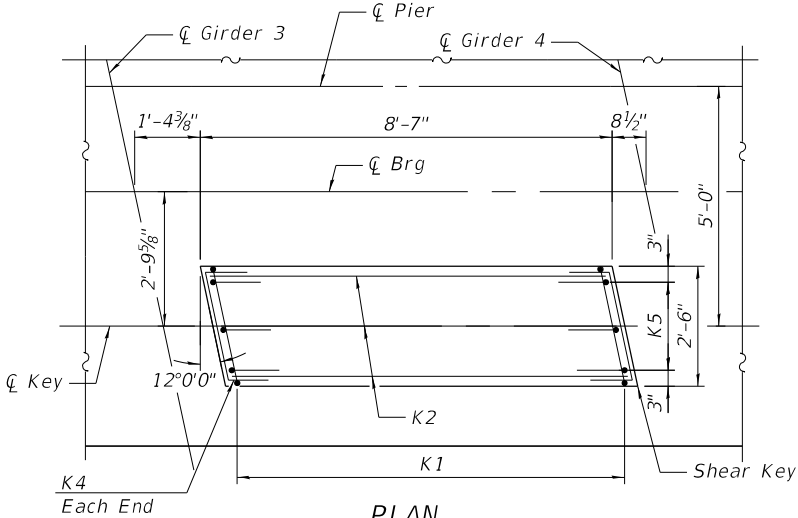

PLAN

Down station key shown.
Up station key mirrored
about ☒ Pier and
opposite hand.

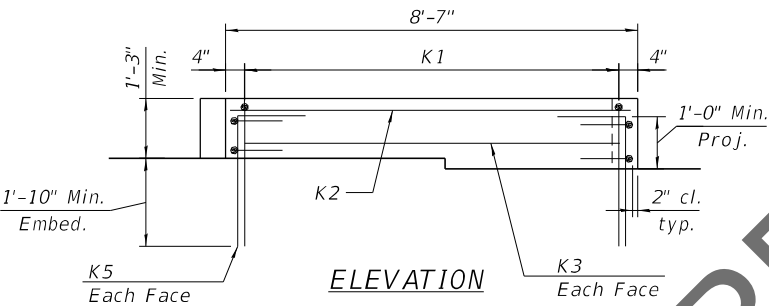

ELEVATION

SHEAR KEY DETAILS

Pier 10


Mark	Bar Callouts
(1)	43 sets of 1-#6 s1001(E) and 3-#6 s1005(E) at 5" cts.
(2)	11 sets of 2-#6 s1002(E) at 8" cts.
(3)	6 sets of 4-#6 s1007(E) at 5" cts.
(4)	47-#6 s1008(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s1003(E) and 2-#6 s1006(E) at 6" cts.
(6)	17 sets of 2-#6 s1004(E) at 6" cts
(7)	18 sets of 2-#6 s1004(E) at 6" cts.
(8)	14-#7 hp1002(E) hoops at 3"
(9)	44-#7 hp1002(E) hoops at 3"
(10)	33-#7 hp1001(E) hoops at 4"
T1	16-#11 p1001(E) or p1002(E) at 11½"
T2	14 bundles of 1-#11 p1005(E) (top) and 1-#11 p1006(E) (bot) at 12" max
B1	16-#11 p1003(E) at 11½"
B2	10-#7 p1004(E) at 11½"
B3	14 bundles of 1-#11 p1005(E) (bot) and 1-#11 p1006(E) (top) at 12" max
H1	10-#8 h1001(E) at 7½"
H2	18-#9 h1002(E) at 7"
H3	22-#6 h1003(E) at abt. 8¼"
A1	8 sets of 1-#7 u1003(E) & 1-#7 u1004(E) at 10½"
A2	10-#7 u1005(E) at 10¾"
U1	11-#8 u1001(E) space with h1001(E) and p1001(E)
U2	20-#9 u1002(E) splice with h1002(E) and space with p1005(E)
C1	22 sets of 1-#14 v1001(E) and 1-#14 v1002(E) alternate eq. spa.
C2	22 bundles of 2-#14 v1003(E) and 2-#14 v1004(E) alternate eq. spa.
C3	40-#11 v1005(E) eq. spa.
D1	#7 sp1001(E) at 6" pitch
D2	#7 sp1002(E) at 4" pitch
D3	#7 sp1003(E) at 3" pitch
K1	20-#5 s1009(E) spa. at 5"
K2	3-#5 h1004(E) space with n1001(E)
K3	1-#5 h1004(E) ea. face
K4	2-#5 h1005(E) ea. face
K5	3-#5 n1001(E) at 12" ea. face

Pier 17

		Bar Callouts
(1)		43 sets of 1-#6 s1701(E) and 3-#6 s1705(E) at 5" cts.
(2)		11 sets of 2-#6 s1702(E) at 8" cts.
(3)		6 sets of 4-#6 s1707(E) at 5" cts.
(4)		47-#6 s1708(E) at abt. 8" cts.
(5)		33 sets of 1-#6 s1703(E) and 2-#6 s1706(E) at 6" cts.
(6)		17 sets of 2-#6 s1704(E) at 6" cts
(7)		18 sets of 2-#6 s1704(E) at 6" cts.
(8)		14-#7 hp1702(E) hoops at 3"
(9)		44-#7 hp1702(E) hoops at 3"
(10)		33-#7 hp1701(E) hoops at 4"
T1		16-#11 p1701(E) or p1702(E) at 11½"
T2		14 bundles of 1-#11 p1705(E) (top) and 1-#11 p1706(E) (bot) at 12" max
B1		16-#11 p1703(E) at 11½"
B2		10-#7 p1704(E) at 11½"
B3		14 bundles of 1-#11 p1705(E) (bot) and 1-#11 p1706(E) (top) at 12" max
H1		10-#8 h1701(E) at 7½"
H2		18-#9 h1702(E) at 7"
H3		22-#6 h1703(E) at abt. 8¼"
A1		8 sets of 1-#7 u1703(E) & 1-#7 u1704(E) at 10½"
A2		10-#7 u1705(E) at 10¾"
U1		11-#8 u1701(E) space with h1701(E) and p1701(E)
U2		20-#9 u1702(E) splice with h1702(E) and space with p1705(E)
C1		22 sets of 1-#14 v1701(E) and 1-#14 v1702(E) alternate eq. spa.
C2		22 bundles of 2-#14 v1703(E) and 2-#14 v1704(E) alternate eq. spa.
C3		40-#11 v1705(E) eq. spa.
D1		#7 sp1701(E) at 6" pitch
D2		#7 sp1702(E) at 4" pitch
D3		#7 sp1703(E) at 3" pitch
K1		20-#5 s1709(E) spa. at 5"
K2		3-#5 h1704(E) space with n1701(E)
K3		1-#5 h1704(E) ea. face
K4		2-#5 h1705(E) ea. face
K5		3-#5 n1701(E) at 12" ea. face


Notes:
For Pier Plan and Elevation, see sheets 205, 206 and 207 of 292.
For bar details, see sheet 209 of 292.
For Bill of Material, see sheet 210 of 292.

MODEL: Default
FILE NAME: C:\JCS4PDF\917545087_111\060-0350-0876\90-bva=43aPRT.dgn
9/10/2021 4:41:16 PM

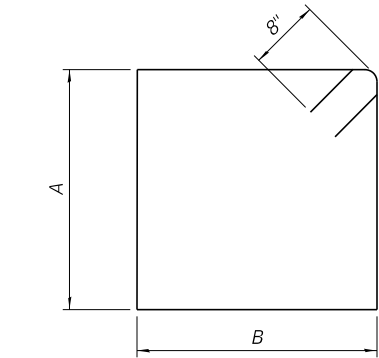


BARS s1001(E) & s1003(E)
BARS s1701(E) & s1703(E)

Bars	A	B
s1001(E) & s1701(E)	7' -8"	14' -8"
s1003(E) & s1703(E)	11' -8"	9' -4"




BARS s1002(E) & s1004(E) & s1007(E)
BARS s1702(E) & s1704(E) & s1707(E)

Bars	A	B
s1002(E) & s1702(E)	7' -8"	9' -4"
s1004(E) & s1704(E)	11' -8"	6' -8"
s1007(E) & s1707(E)	6' -6"	5' -10"




BARS s1005(E) & s1006(E)
BARS s1705(E) & s1706(E)

Bars	A
s1005(E) & s1705(E)	7' -8"
s1006(E) & s1706(E)	11' -8"

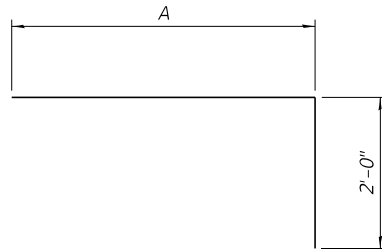


BARS p1001(E) & p1002(E)
BARS p1701(E) & p1702(E)

Bars	A
p1001(E) & p1701(E)	24' -0"
p1002(E) & p1702(E)	49' -5"




BARS p1005(E) & p1006(E)
BARS p1705(E) & p1706(E)

Bars	A
p1005(E) & p1705(E)	54' -2"
p1006(E) & p1706(E)	53' -8"




BARS u1003(E)
BARS u1703(E)

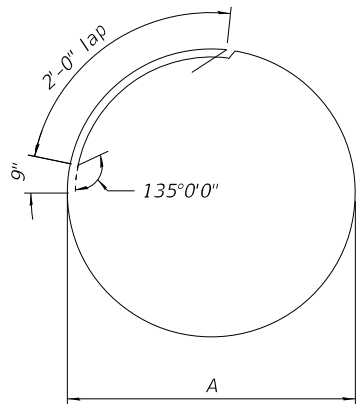


BARS hp1001(E) & hp1002(E)
BARS hp1701(E) & hp1702(E)

Bars	A
hp1001(E) & hp1701(E)	8' -2"
hp1002(E) & hp1702(E)	6' -8"




BARS u1001(E) & u1002(E)
BARS u1701(E) & u1702(E)

Bars	A	B	C	R
u1001(E) & u1701(E)	5' -4"	22' -9"	5' -4"	7' -3"
u1002(E) & u1702(E)	5' -9"	14' -5"	7' -9"	4' -7"

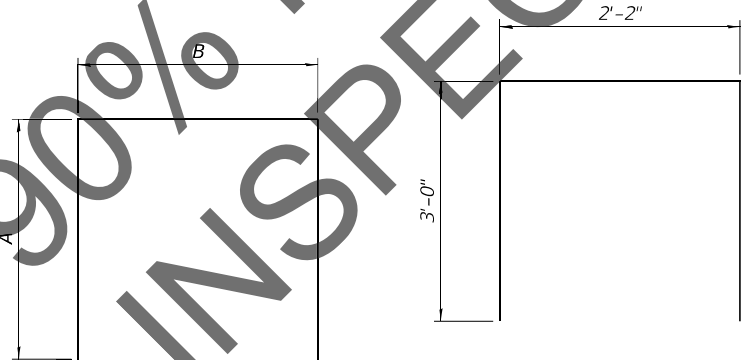


BARS u1005(E) & s1008(E)
BARS u1705(E) & s1708(E)


Bars	A	B
u1005(E) & u1705(E)	4' -7"	11' -6"
s1008(E) & s1708(E)	2' -9"	14' -8"




BARS s1009(E)
BARS s1709(E)

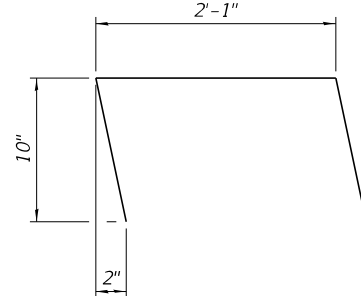

BARS h1005(E)
BARS h1705(E)



BARS n1001(E)
BARS n1701(E)



BARS u1004(E)
BARS u1704(E)

Pier 10
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1001(E)	20	#8	49'-2"	—
h1002(E)	36	#9	38'-0"	—
h1003(E)	22	#6	31'-7"	—
h1004(E)	10	#5	8'-3"	—
h1005(E)	8	#5	3'-11"	┘
hp1001(E)	99	#7	29'-2"	○
hp1002(E)	174	#7	24'-6"	○
n1001(E)	12	#5	3'-10"	┘
p1001(E)	16	#11	26'-0"	┘
p1002(E)	16	#11	51'-5"	┘
p1003(E)	16	#11	57'-9"	—
p1004(E)	20	#7	2'-11"	—
p1005(E)	28	#11	58'-2"	┘
p1006(E)	28	#11	57'-8"	┘
s1001(E)	86	#6	46'-0"	□
s1002(E)	66	#6	26'-4"	□
s1003(E)	66	#6	43'-4"	□
s1004(E)	106	#6	25'-0"	□
s1005(E)	258	#6	9'-4"	┘
s1006(E)	132	#6	13'-4"	┘
s1007(E)	48	#6	18'-2"	□
s1008(E)	47	#6	20'-2"	□
s1009(E)	40	#5	8'-2"	□
*** sp1001(E)	3	#7	24'-6"	〰〰〰
*** sp1002(E)	3	#7	47'-2"	〰〰〰
*** sp1003(E)	3	#7	19'-2"	〰〰〰
u1001(E)	22	#8	33'-5"	⊂
u1002(E)	40	#9	27'-11"	⊂
u1003(E)	16	#7	6'-9"	┘
u1004(E)	16	#7	6'-10"	┘
u1005(E)	20	#7	20'-8"	□
v1001(E)	66	#14	42'-9"	—
v1002(E)	66	#14	40'-0"	—
v1003(E)	132	#14	35'-0"	—
v1004(E)	132	#14	47'-9"	—
v1005(E)	120	#11	37'-9"	—
Concrete Structures			Cu. Yd.	619.5
Reinforcement Bars, Epoxy Coated			Pound	275,760
Permanent Casing			Foot	144
Drilled Shaft in Soil			Cu. Yd.	326
Drilled Shaft in Rock			Cu. Yd.	161
Concrete Sealer			Sq. Ft.	6,257
Crosshole Sonic Logging Access Ducts			Foot	215
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	215
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 17
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1701(E)	20	#8	49'-2"	—
h1702(E)	36	#9	38'-0"	—
h1703(E)	22	#6	31'-7"	—
h1704(E)	10	#5	8'-3"	—
h1705(E)	8	#5	3'-11"	┘
hp1701(E)	99	#7	29'-2"	○
hp1702(E)	174	#7	24'-6"	○
n1701(E)	12	#5	3'-10"	┘
p1701(E)	16	#11	26'-0"	┘
p1702(E)	16	#11	51'-5"	┘
p1703(E)	16	#11	57'-9"	—
p1704(E)	20	#7	2'-11"	—
p1705(E)	28	#11	58'-2"	┘
p1706(E)	28	#11	57'-8"	┘
s1701(E)	86	#6	46'-0"	□
s1702(E)	66	#6	26'-4"	□
s1703(E)	66	#6	43'-4"	□
s1704(E)	106	#6	25'-0"	□
s1705(E)	258	#6	9'-4"	┘
s1706(E)	132	#6	13'-4"	┘
s1707(E)	48	#6	18'-2"	□
s1708(E)	47	#6	20'-2"	□
s1709(E)	40	#5	8'-2"	□
*** sp1701(E)	3	#7	24'-6"	〰〰〰
*** sp1702(E)	3	#7	69'-11"	〰〰〰
*** sp1703(E)	3	#7	18'-1"	〰〰〰
u1701(E)	22	#8	33'-5"	⊂
u1702(E)	40	#9	27'-11"	⊂
u1703(E)	16	#7	6'-9"	┘
u1704(E)	16	#7	6'-10"	┘
u1705(E)	20	#7	20'-8"	□
v1701(E)	66	#14	51'-5"	—
v1702(E)	66	#14	54'-1"	—
v1703(E)	132	#14	46'-5"	—
v1704(E)	132	#14	59'-1"	—
v1705(E)	120	#11	36'-9"	—
Concrete Structures			Cu. Yd.	613
Reinforcement Bars, Epoxy Coated			Pound	319,720
Permanent Casing			Foot	213
Drilled Shaft in Soil			Cu. Yd.	486
Drilled Shaft in Rock			Cu. Yd.	161
Concrete Sealer			Sq. Ft.	6,180
Crosshole Sonic Logging Access Ducts			Foot	283
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	283
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.


Notes:

For Pier Plan and Elevation, see sheets 205 thru 207 of 292.

For additional bar details, see sheets 208 and 209 of 292.


Pier 10 & 17 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (12,242 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.

The quantities and reinforcement detailing are based on the estimated top of competent rock and the estimated elevations shown and may change based on the actual elevations encountered at each shaft.

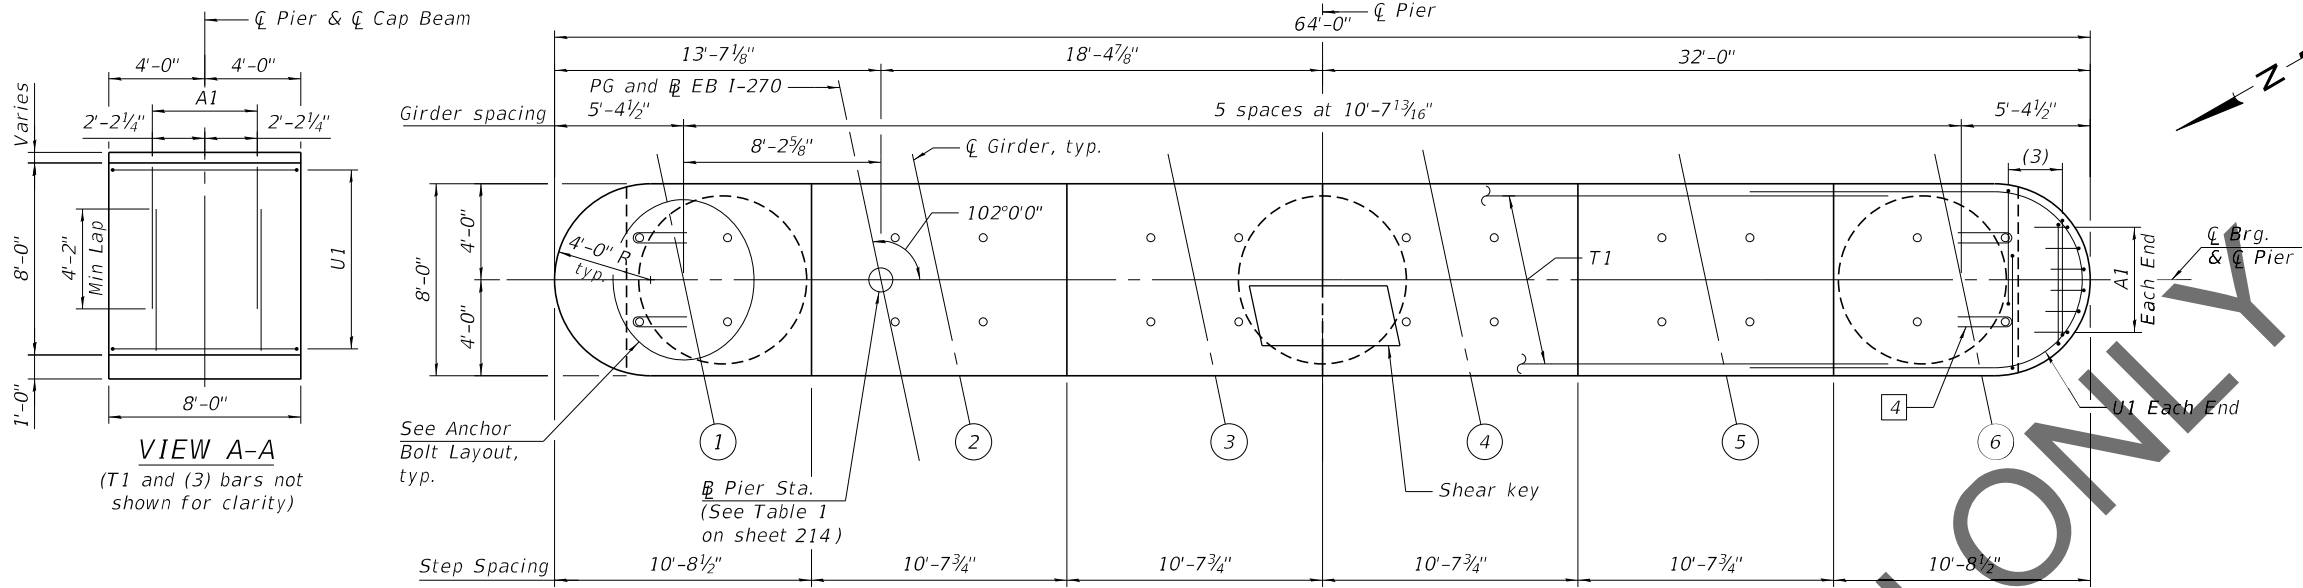


Notes:
Space reinforcement in cap to miss anchor bolts.
Pour steps monolithically with cap.


TOP PLAN

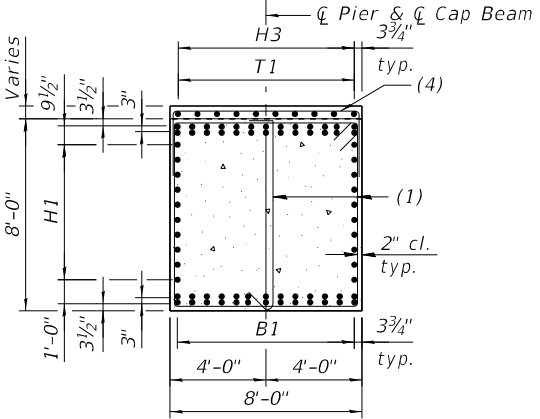


SECTION C-C

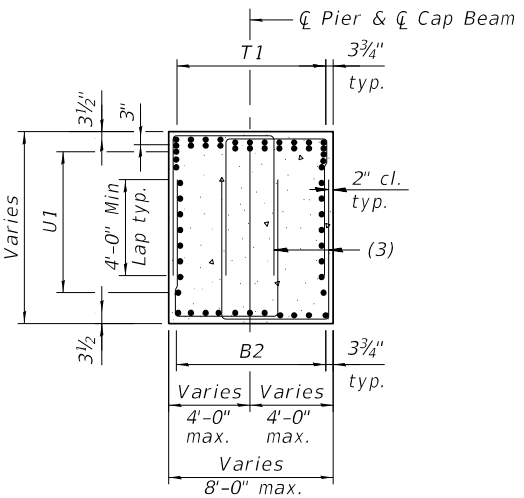

SECTION D-D

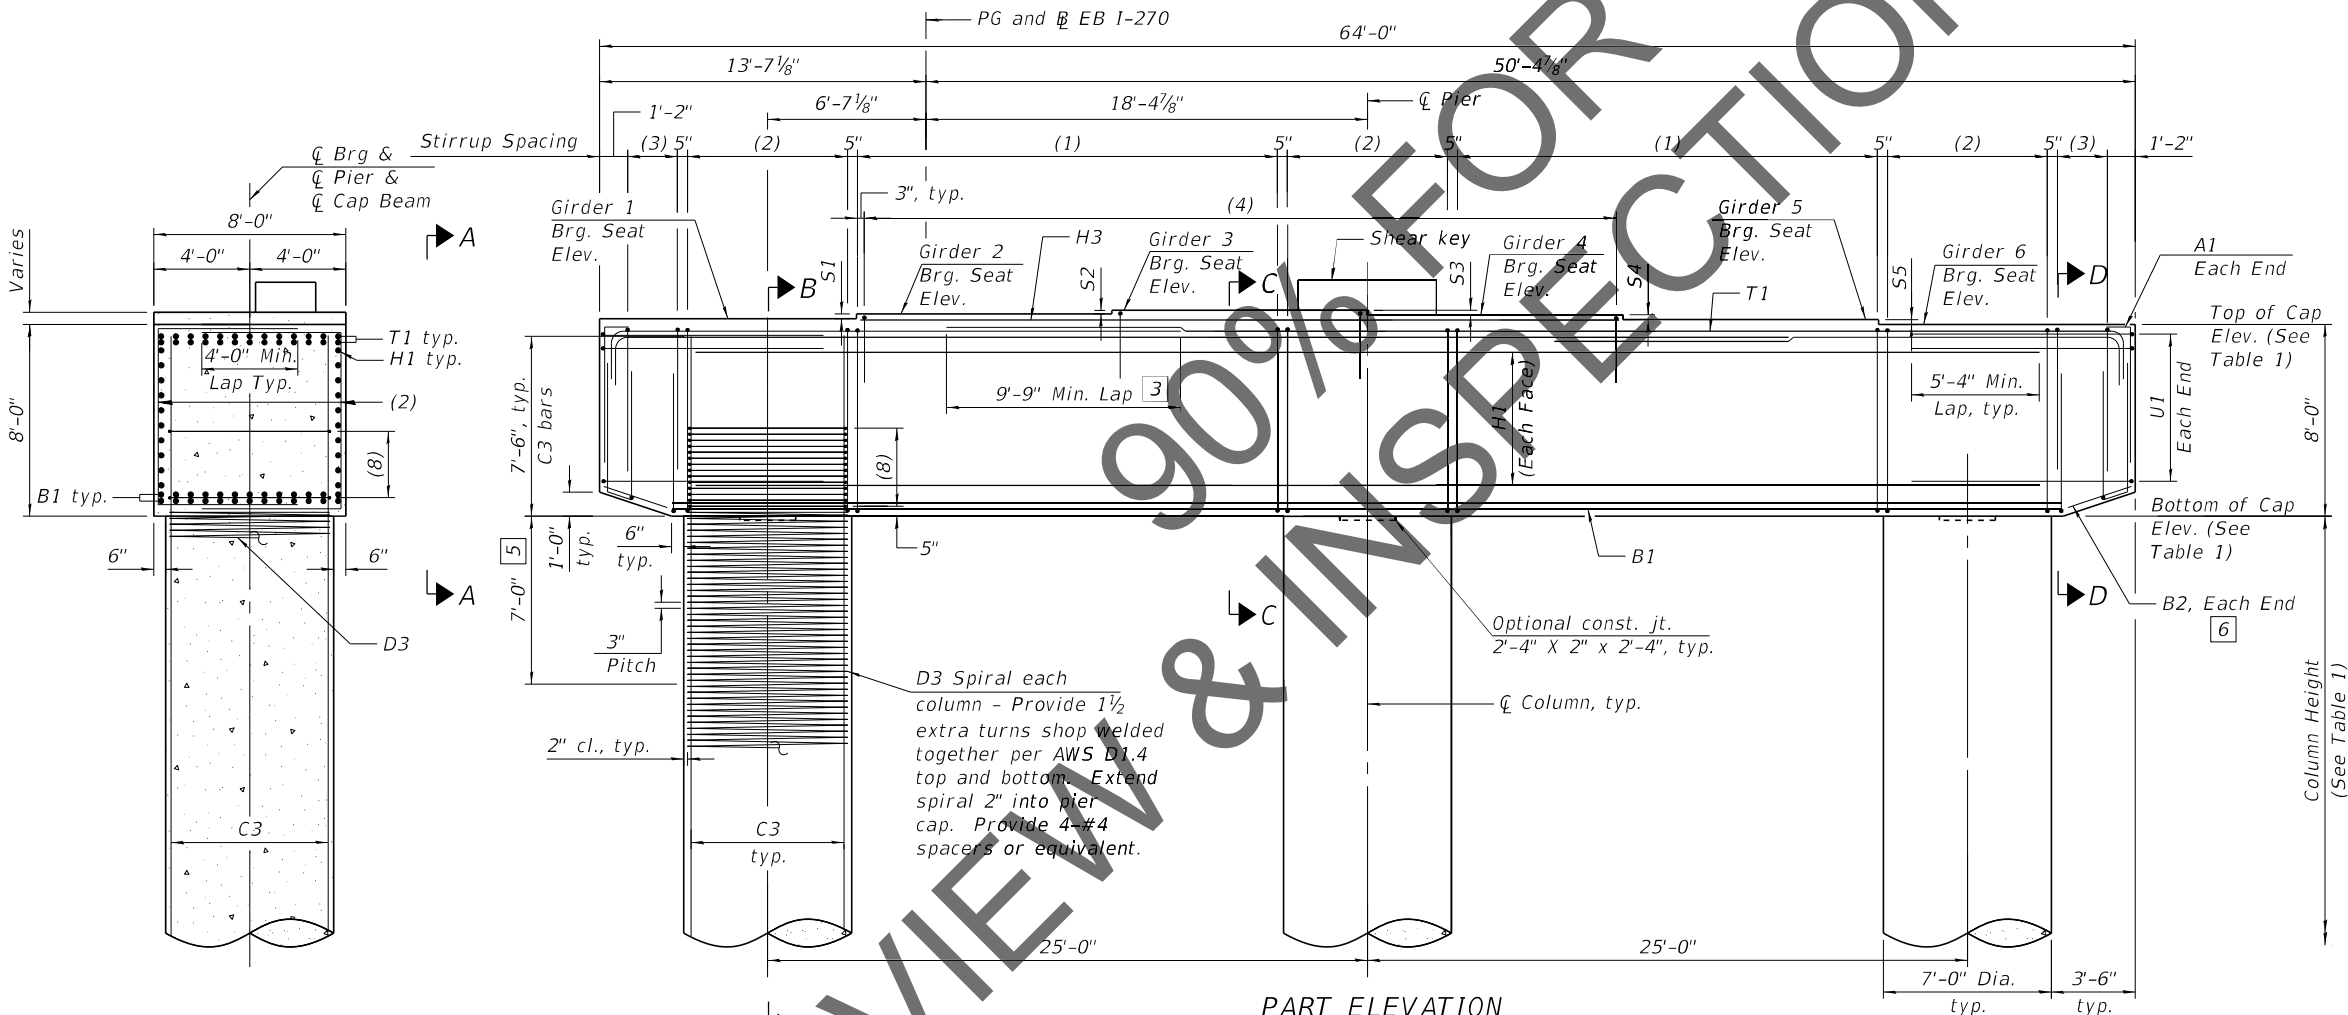

PART ELEVATION
(Looking East)

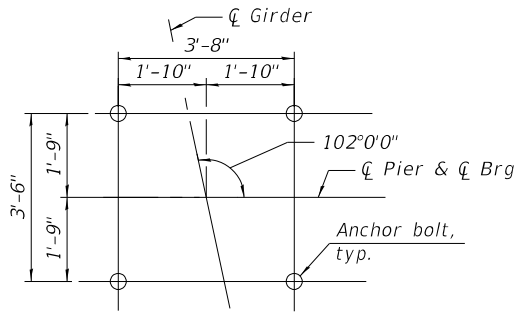

ANCHOR BOLTS LAYOUT

SECTION B-B

- [3] Alternate placement cap top rebars to stagger the laps
- [4] Provide 2 #4 R bar at each anchor shown. Place first R bar with top mat reinforcement and second R bar 6" below top U bar


- [5] No splicing of bars allowed in this region.
- [6] Field cut bars when needed to keep 2" clear concrete cover.

Notes:
For bar details and Bill of Materials see sheets 215 and 216 of 292.
For column height, step height and all Elevations, See Table 1 on sheet 214 of 292.
For bearing details, see sheet 161 of 292.
For bar callouts and shear key details, see sheet 214 of 292.


MODEL: Default
FILE NAME: C:\C54PDF\917545087_68\060-0350-D876\90-bwa-46aPPE.dgn
9/10/2021 4:43:01 PM

USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	412
CONTRACT NO. 76J90				

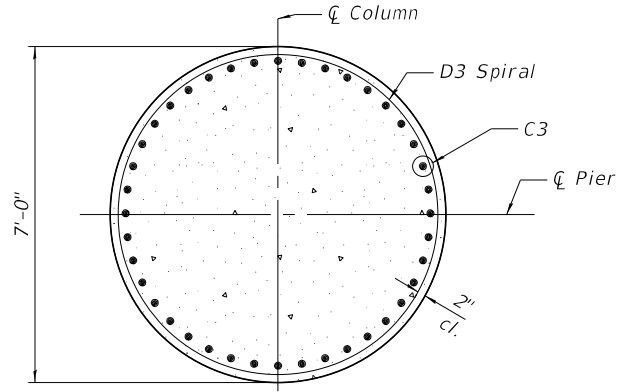


SECTION E-E

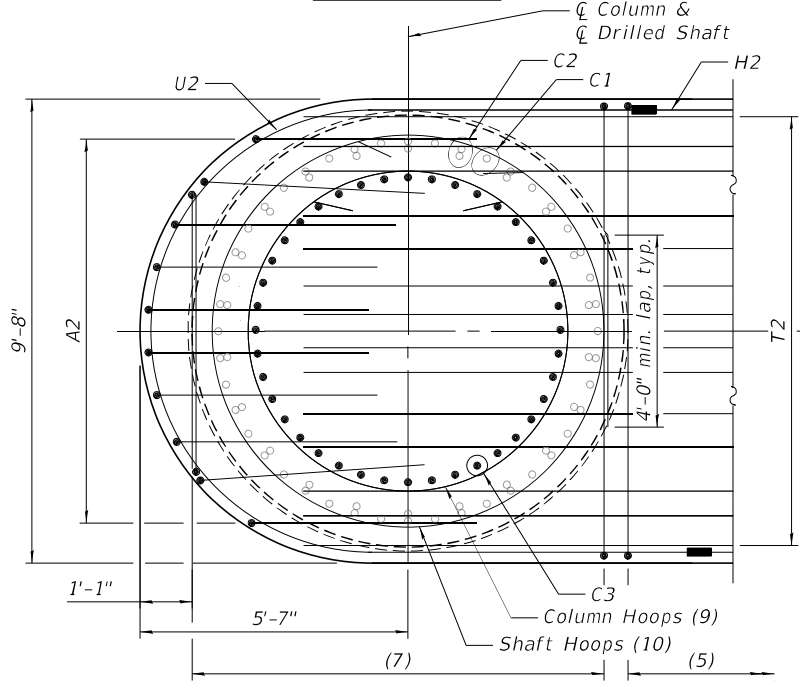


SECTION F-F

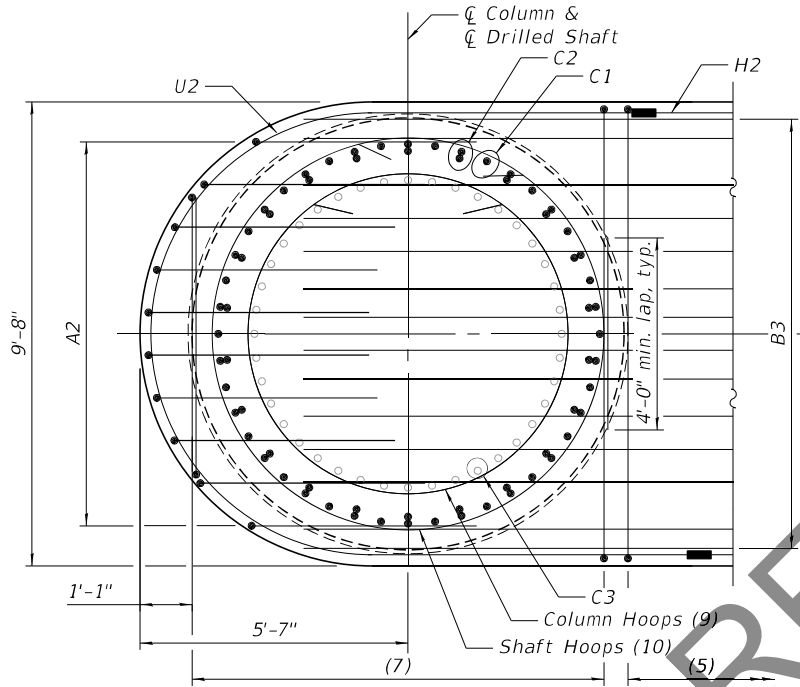


SECTION G-G

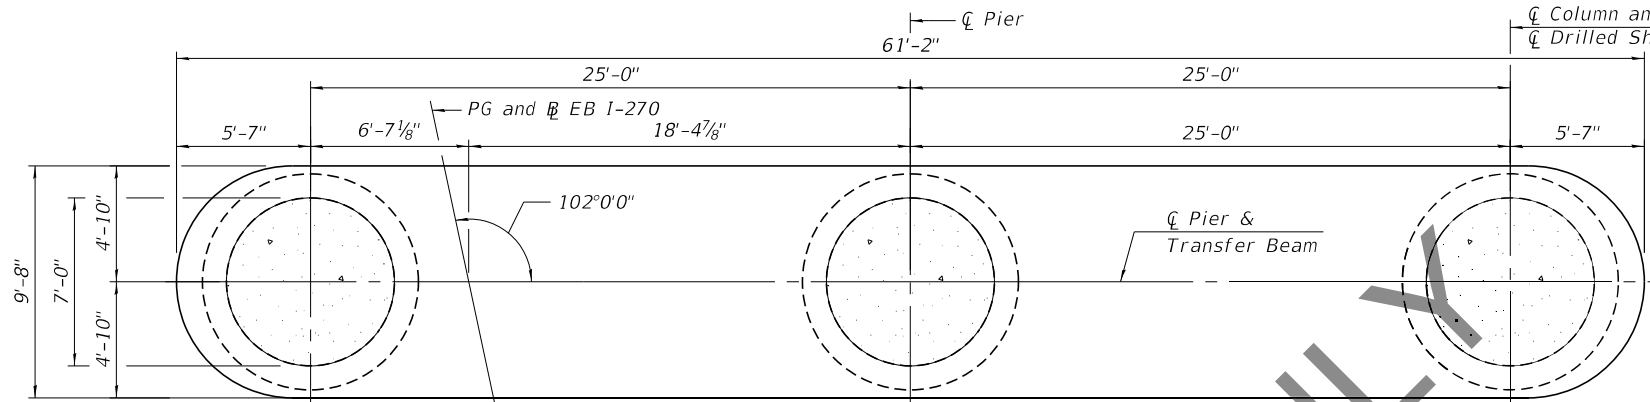

PLAN - TRANSFER BEAM

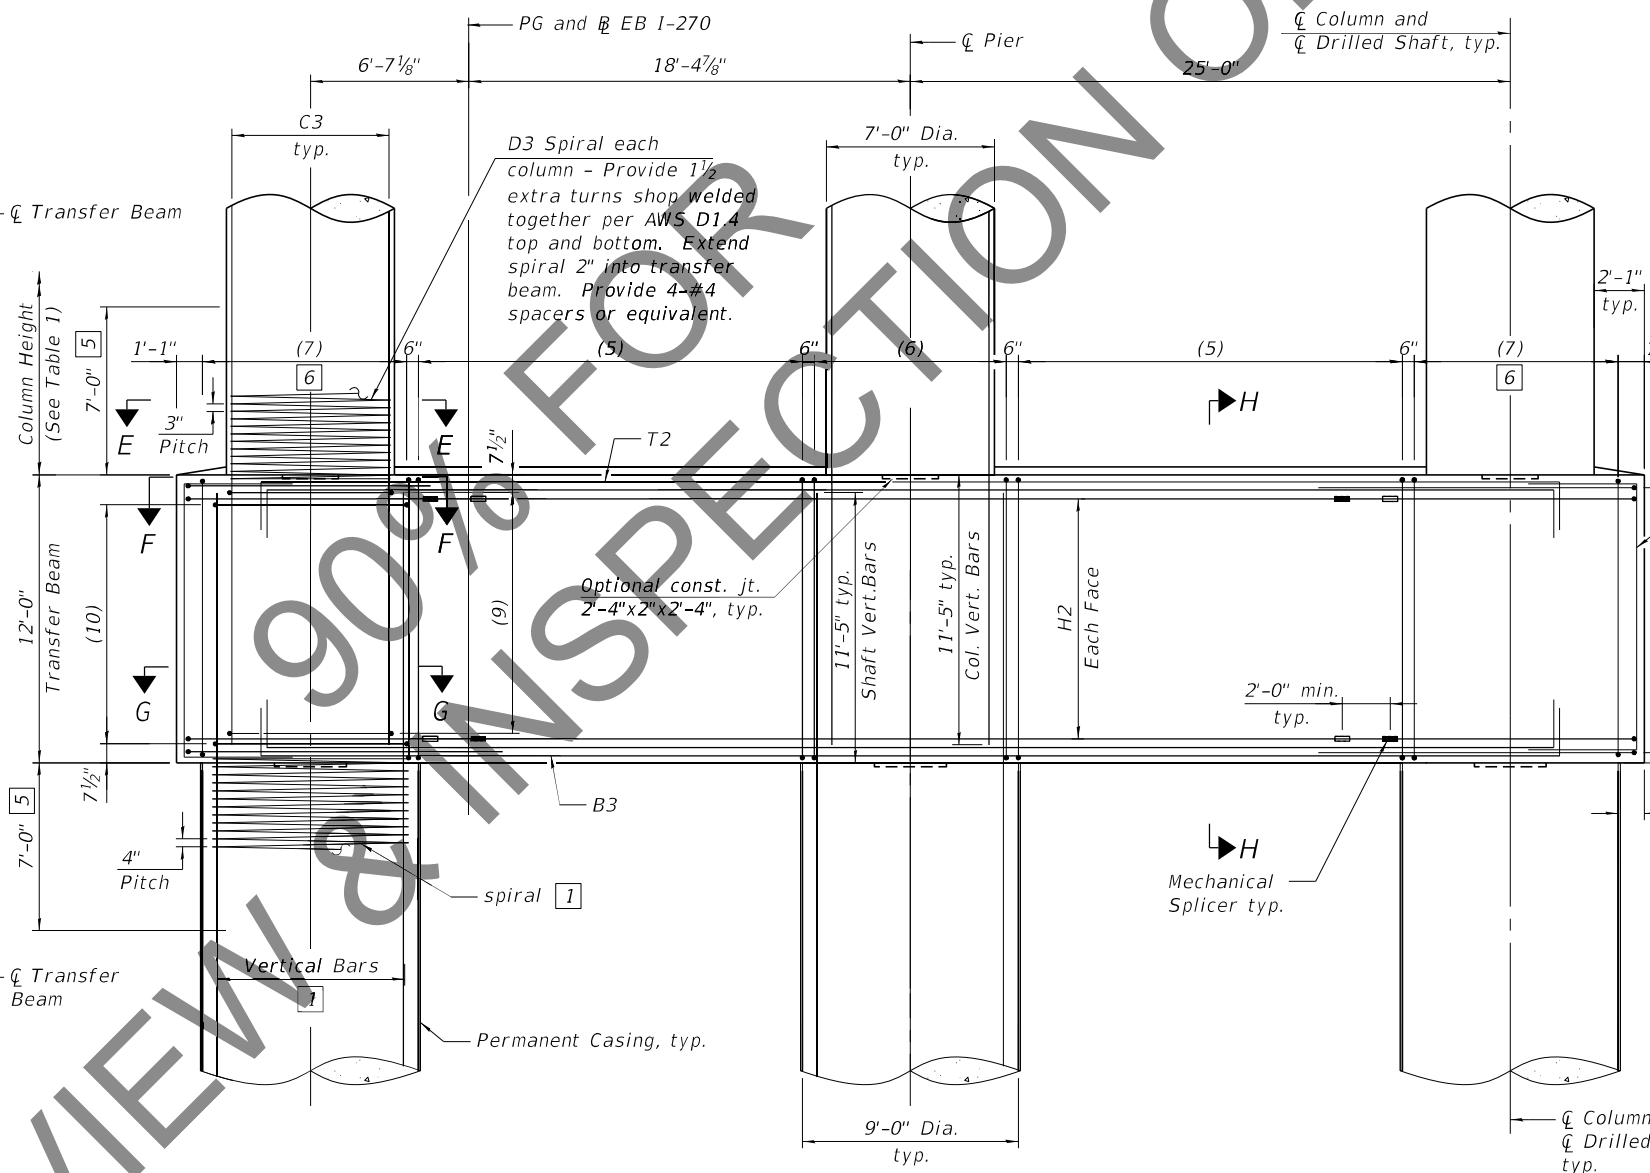


PART ELEVATION - TRANSFER BEAM
(Looking East)

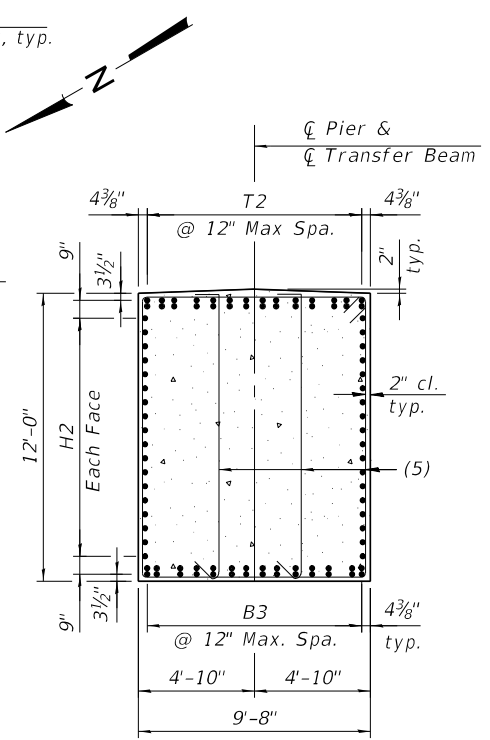


SECTION H-H

- 1 See sheet 213 of 292 for additional rebar placement.
- 2 Adjust transfer beam rebar slightly when conflict with column or shaft vertical bar.
- 5 No splicing of bars allowed in this region.
- 6 Field cut bars when needed to keep 2" clear concrete cover.


Notes:
For Top Plan and Part Elevation, see sheet 211 of 292.
For Drilled Shaft Details, see sheet 213 of 292.
For additional notes, bar details, and Bill of Material, see sheets 214, 215 and 216 of 292.
For Table 1, see sheet 214 of 292.
For Mechanical Splicer details, see sheet 248 of 292.

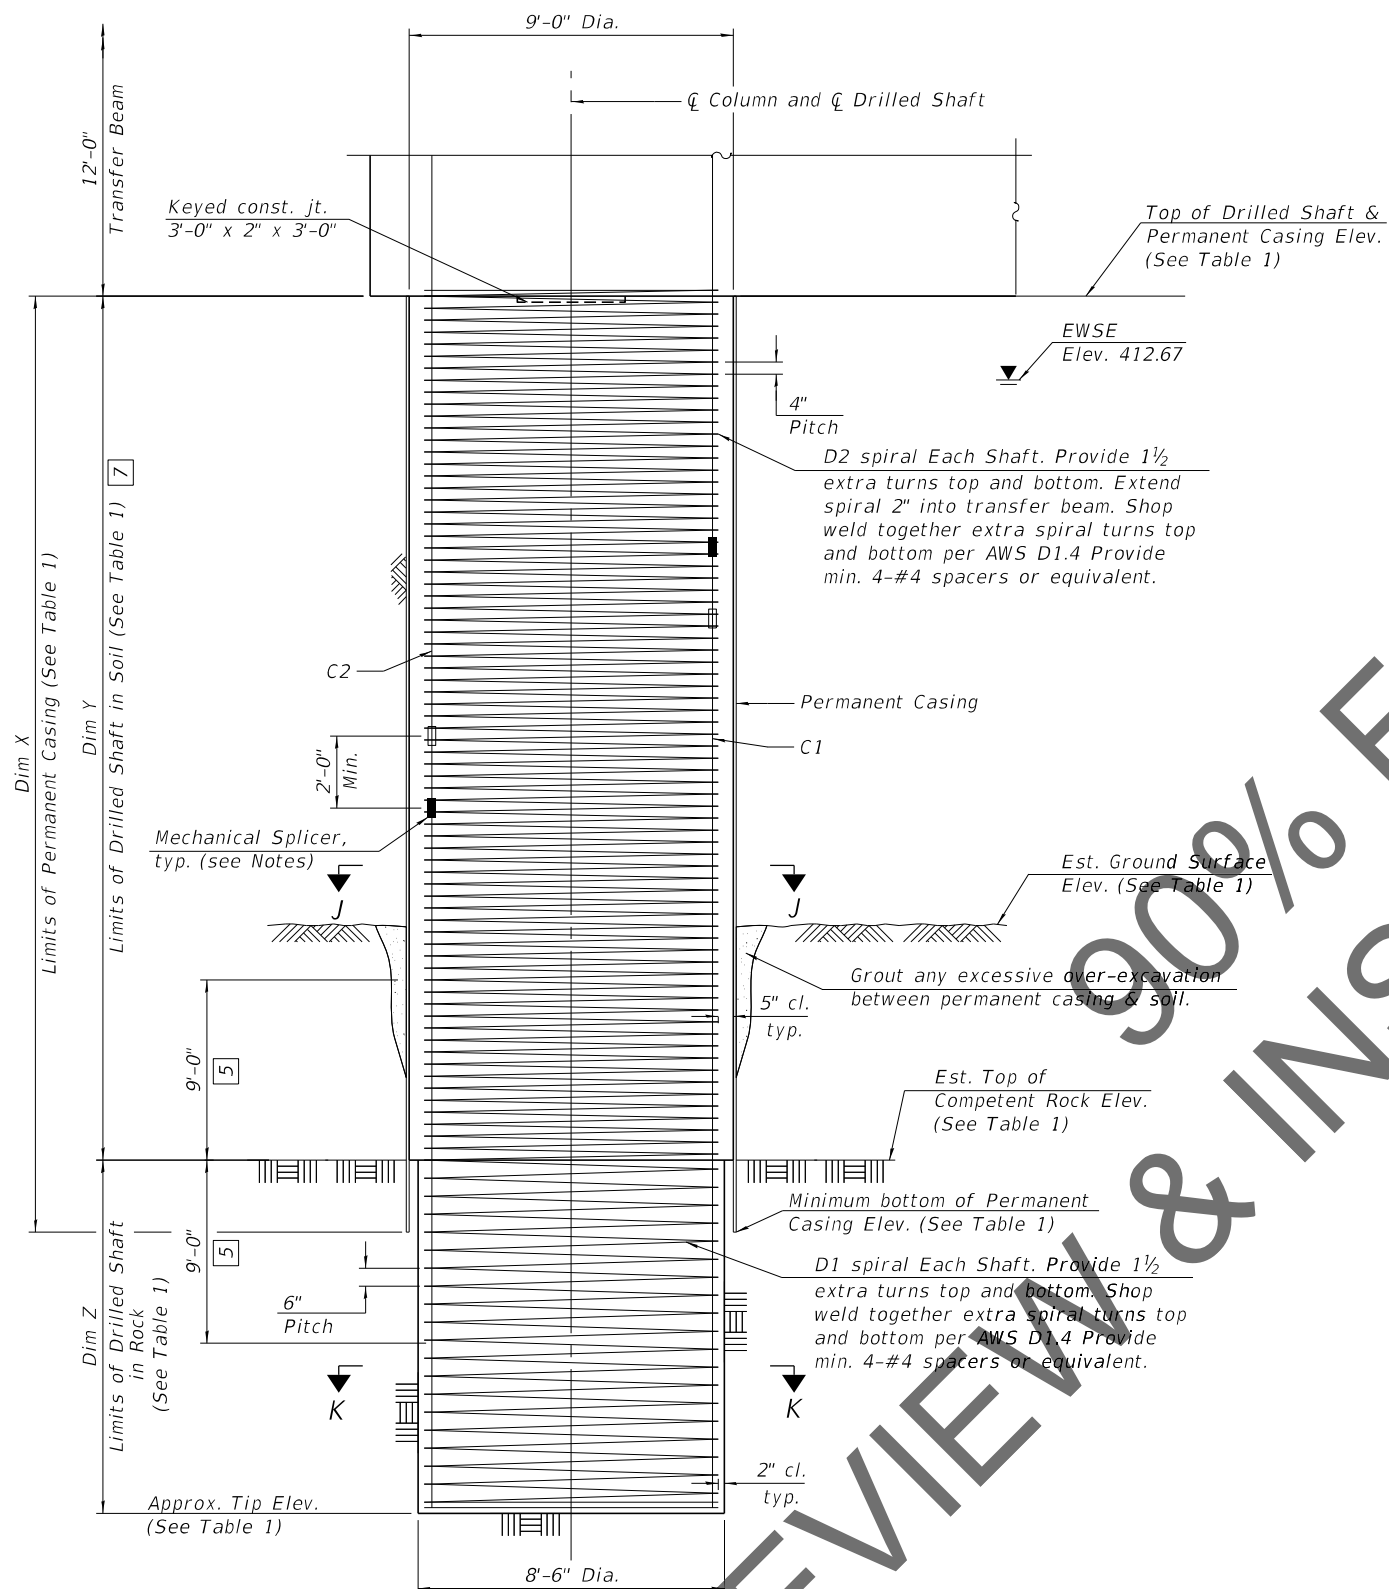

DRILLED SHAFT DETAIL
(One shaft shown, three shafts required,
one under each column)

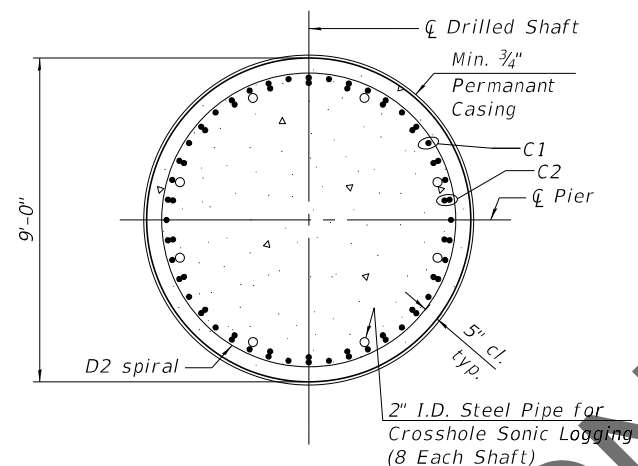


SECTION J-J

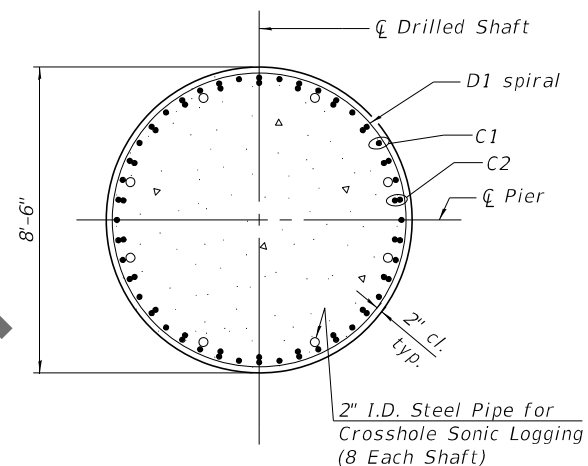

SECTION K-K

- 5 No splicing of bars allowed in this region.
- 7 If the prevailing water surface elevation during construction is consistently different than estimated on the plans, the contractor may propose an adjustment to the top of the drilled shaft elevation as part of their installation procedure. The top of all drilled shafts within a substructure unit shall be constructed to the same elevation and extend above the prevailing water surface. The quantities and reinforcement detailing are based on the top of shaft and the estimated elevations shown and may change based on the actual elevations encountered at each shaft and the final top of shaft elevation.

Notes:
For Pier Plan and Elevation, see Sheets 211 and 212 of 292.
For additional notes, bar details, and Bill of Materials, see sheets 215 and 216 of 292.
For Table 1, see sheet 214 of 292.
For Mechanical Splicer Details, see sheet 248 of 292.
The Contractor may propose a construction joint in the drilled shaft so separate pours can be made, if the shaft can be poured in the dry, subject to approval from the Engineer.
The Permanent Casing is shown embedded 2 ft. into rock for estimate of quantities. The Contractor is responsible for determining the casing thickness and the actual tip elevation to be used. See Article 516.06(d) of the Standard Specifications. Pay Limits for the Permanent Casing shall be based on the minimum length shown.
When splicing of spiral reinforcement is necessary, the spirals shall be provided with 1 1/2 extra turns at the ends to be spliced. These additional turns shall either be welded together according to AWS D1.4, or shall both terminate with a 135° standard hook.
Alternate location of mechanical splices of C1 bars every other bar.
Alternate location of mechanical splices of C2 bars within each bundle.

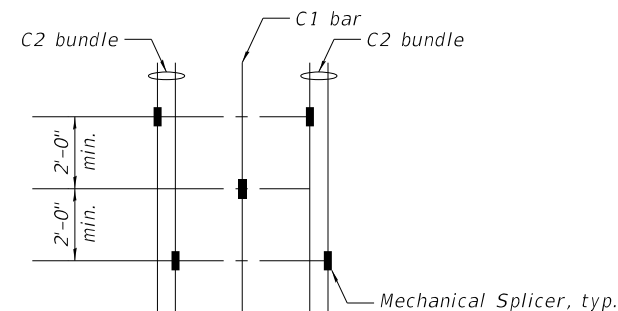


ALTERNATE MECHANICAL SPLICERS LOCATION


MODEL: Default
FILE NAME: C:\C54PDF\F920845087_67\060-0350-D876\90-bwa-47aPPE.dgn
9/11/2021 5:20:16 PM

TABLE 1

		Pier 11	Pier 16
☐ Pier Station		1801+48.97	1813+28.97
Bearing Seat Elevation	Girder 1	454.77	453.65
	Girder 2	454.97	453.87
	Girder 3	455.13	454.05
	Girder 4	454.91	453.86
	Girder 5	454.70	453.66
Girder 6		454.48	453.46
Top of Cap Elevation		454.48	453.46
Bottom of Cap Elevation		446.48	445.46
Column Height		19'-5¾"	18'-5½"
Top of Shaft Elevation		415.00	415.00
Approx. Tip Elevation		338.70	322.10
Est. Ground Surface Elevation		366.90	376.80
Est. Top of Rock Elevation		364.20	347.60
Min. bottom of Permament Casing Elevation		362.20	345.60
Dim X		52'-9½"	69'-4¾"
Dim Y		50'-9½"	67'-4¾"
Dim Z		25'-6"	25'-6"
S1		2 ⅜ "	2 ⅝ "
S2		1 ⅞ "	2 ⅛ "
S3		2 ⅝ "	2 ¼ "
S4		2 ½ "	2 ⅜ "
S5		2 ⅝ "	2 ⅜ "

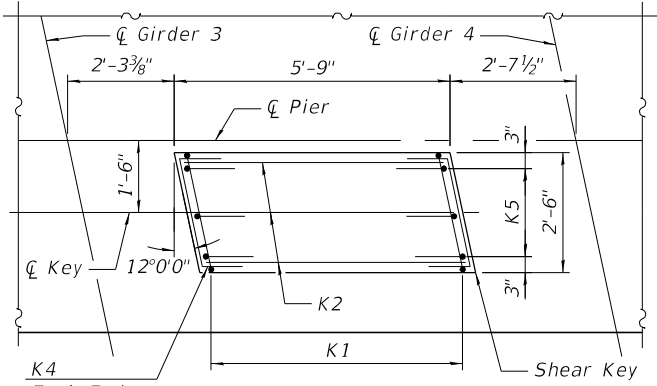

PLAN

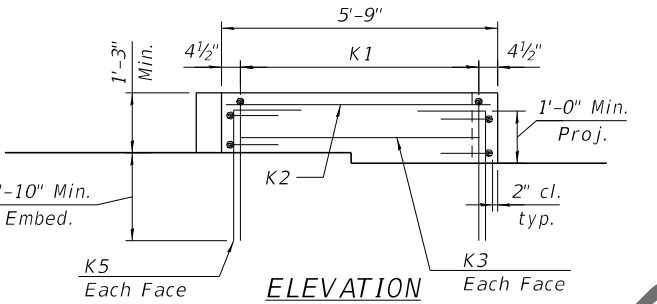

ELEVATION

SHEAR KEY DETAILS

Pier 11

Mark	Bar Callouts
(1)	43 sets of 1-#6 s1101(E) and 1-#6 s1105(E) at 5" cts.
(2)	11 sets of 2-#6 s1102(E) at 8" cts.
(3)	6 sets of 4-#6 s1107(E) at 5" cts.
(4)	47-#6 s1108(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s1103(E) and 2-#6 s1106(E) at 6" cts.
(6)	17 sets of 2-#6 s1104(E) at 6" cts
(7)	18 sets of 2-#6 s1104(E) at 6" cts.
(8)	14-#7 hp1102(E) hoops at 3"
(9)	44-#7 hp1102(E) hoops at 3"
(10)	33-#7 hp1101(E) hoops at 4"
T1	2 layers of 13-#11 p1101(E) or p1102(E) at 7⅝"
T2	14 bundles of 1-#11 p1105(E) (top) and 1-#11 p1106(E) (bot) at 12" max
B1	2 layers of 13-#11 p1103(E) at 7⅝"
B2	11-#7 p1104(E) at 7⅝"
B3	14 bundles of 1-#11 p1105E (bot) and 1-#11 p1106(E) (top) at 12" max
H1	10-#8 h1101(E) at 7½"
H2	18-#9 h1102(E) at 7"
H3	10-#6 h1103(E) at abt. 9¾"
A1	6 sets of 1-#7 u1103(E) & 1-#7 u1104(E) at 10½"
A2	10-#7 u1105(E) at 10¾"
U1	11-#8 u1101(E) space with h1101(E) and p1101(E)
U2	20-#9 u1102(E) splice with h1102(E) and space with p1105(E)
C1	22 sets of 1-#14 v1101(E) and 1-#14 v1102(E) alternate eq. spa.
C2	22 bundles of 2-#14 v1103(E) and 2-#14 v1104(E) alternate eq. spa.
C3	40-#11 v1105(E) eq. spa.
D1	#7 sp1101(E) at 6" pitch
D2	#7 sp1102(E) at 4" pitch
D3	#7 sp1103(E) at 3" pitch
K1	13-#5 s1109(E) spa. at 5"
K2	3-#5 h1104(E) space with n1101(E)
K3	1-#5 h1104(E) ea. face
K4	2-#5 h1105(E) ea. face
K5	3-#5 n1101(E) at 12" ea. face
R	#5 s1110(E)


Pier 16

Mark	Bar Callouts
(1)	43 sets of 1-#6 s1601(E) and 1-#6 s1605(E) at 5" cts.
(2)	11 sets of 2-#6 s1602(E) at 8" cts.
(3)	6 sets of 4-#6 s1607(E) at 5" cts.
(4)	47-#6 s1608(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s1603(E) and 2-#6 s1606(E) at 6" cts.
(6)	17 sets of 2-#6 s1604(E) at 6" cts
(7)	18 sets of 2-#6 s1604(E) at 6" cts.
(8)	14-#7 hp1602(E) hoops at 3"
(9)	44-#7 hp1602(E) hoops at 3"
(10)	33-#7 hp1601(E) hoops at 4"
T1	2 layers of 13-#11 p1601(E) or p1602(E) at 7⅝"
T2	14 bundles of 1-#11 p1605(E) (top) and 1-#11 p1606(E) (bot) at 12" max
B1	2 layers of 13-#11 p1603(E) at 7⅝"
B2	11-#7 p1604(E) at 7⅝"
B3	14 bundles of 1-#11 p1605(E) (bot) and 1-#11 p1606(E) (top) at 12" max
H1	10-#8 h1601(E) at 7½"
H2	18-#9 h1602(E) at 7"
H3	10-#6 h1603(E) at abt. 9¾"
A1	6 sets of 1-#7 u1603(E) & 1-#7 u1604(E) at 10½"
A2	10-#7 u1605(E) at 10¾"
U1	11-#8 u1601(E) space with h1601(E) and p1601(E)
U2	20-#9 u1602(E) splice with h1602(E) and space with p1605(E)
C1	22 sets of 1-#14 v1601(E) and 1-#14 v1602(E) alternate eq. spa.
C2	22 bundles of 2-#14 v1603(E) and 2-#14 v1604(E) alternate eq. spa.
C3	40-#11 v1605(E) eq. spa.
D1	#7 sp1601(E) at 6" pitch
D2	#7 sp1602(E) at 4" pitch
D3	#7 sp1603(E) at 3" pitch
K1	13-#5 s1609(E) spa. at 5"
K2	3-#5 h1604(E) space with n1601(E)
K3	1-#5 h1604(E) ea. face
K4	2-#5 h1605(E) ea. face
K5	3-#5 n1601(E) at 12" ea. face
R	#5 s1610(E)

Notes:
For Pier Plan and Elevation, see sheets 211, 212 and 213 of 292 .
For bar details, see sheet 215 of 292 .
For Bill of Material, see sheet 216 of 292 .


MODEL: Default
FILE NAME: C:\CS4PDF\917545087_70\060-0350-D876\90-bwa-48aPRT.dgn
9/10/2021 4:41:02 PM

MODEL: Default
FILE NAME: C:\JCS4PDF\917545087_73\060-0350-D876\90-bwa-49aPRT.dgn
9/10/2021 4:40:50 PM




BARS s1101(E) & s1103(E)
BARS s1601(E) & s1603(E)

Bars	A	B
s1101(E) & s1601(E)	7' -8"	7' -8"
s1103(E) & s1603(E)	11' -8"	9' -4"




BARS s1102(E) & s1104(E) & s1107(E)
BARS s1602(E) & s1604(E) & s1607(E)

Bars	A	B
s1102(E) & s1602(E)	7' -8"	5' -10"
s1104(E) & s1604(E)	11' -8"	6' -8"
s1107(E) & s1607(E)	4' -10"	5' -10"




BARS s1105(E) & s1106(E)
BARS s1605(E) & s1606(E)

Bars	A
s1105(E) & s1605(E)	7' -8"
s1106(E) & s1606(E)	11' -8"

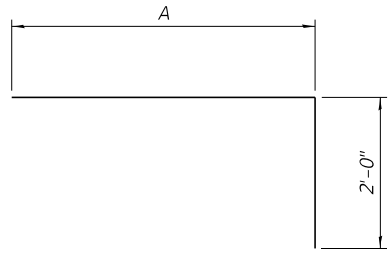


BARS p1101(E) & p1102(E)
BARS p1601(E) & p1602(E)

Bars	A
p1101(E) & p1601(E)	24' -0"
p1102(E) & p1602(E)	49' -5"




BARS p1105(E) & p1106(E)
BARS p1605(E) & p1606(E)

Bars	A
p1105(E) & p1605(E)	54' -2"
p1106(E) & p1606(E)	53' -8"




BARS u1103(E)
BARS u1603(E)

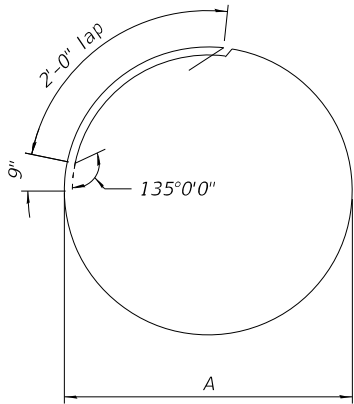


BARS hp1101(E) & hp1102(E)
BARS hp1601(E) & hp1602(E)

Bars	A
hp1101(E) & hp1601(E)	8' -2"
hp1102(E) & hp1602(E)	6' -8"




BARS u1101(E) & u1102(E)
BARS u1601(E) & u1602(E)

Bars	A	B	C	R
u1101(E) & u1601(E)	5' -4"	14' -9"	5' -4"	3' -9"
u1102(E) & u1602(E)	5' -9"	14' -5"	7' -9"	4' -7"

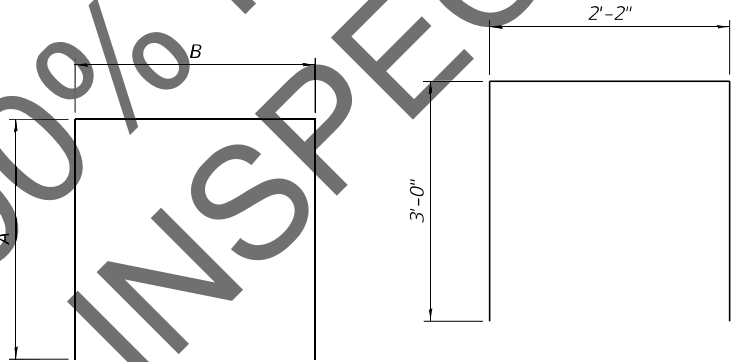


BARS u1105(E) & s1108(E)
BARS u1605(E) & s1608(E)


Bars	A	B
u1105(E) & u1605(E)	4' -7"	11' -6"
s1108(E) & s1608(E)	2' -9"	7' -8"




BARS s1109(E)
BARS s1609(E)

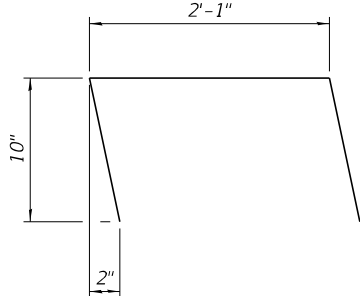


BARS h1105(E)
BARS h1605(E)



BARS n1101(E)
BARS n1601(E)



BARS s1110(E)
BARS s1610(E)



BARS u1104(E)
BARS u1604(E)

Pier 11
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1101(E)	20	#8	56'-2"	—
h1102(E)	36	#9	38'-0"	—
h1103(E)	10	#6	31'-7"	—
h1104(E)	5	#5	5'-5"	—
h1105(E)	4	#5	3'-11"	⌒
hp1101(E)	99	#7	29'-2"	○
hp1102(E)	174	#7	24'-6"	○
n1101(E)	6	#5	3'-10"	┐
p1101(E)	26	#11	26'-0"	┐
p1102(E)	26	#11	51'-5"	┐
p1103(E)	26	#11	57'-9"	—
p1104(E)	22	#7	2'-11"	—
p1105(E)	28	#11	58'-2"	┐
p1106(E)	28	#11	57'-8"	┐
s1101(E)	86	#6	32'-0"	□
s1102(E)	66	#6	19'-4"	□
s1103(E)	66	#6	43'-4"	□
s1104(E)	106	#6	25'-0"	□
s1105(E)	86	#6	9'-4"	┐
s1106(E)	132	#6	13'-4"	┐
s1107(E)	48	#6	16'-6"	□
s1108(E)	47	#6	13'-2"	□
s1109(E)	13	#5	8'-2"	□
s1110(E)	8	#5	5'-5"	▯
*** sp1101(E)	3	#7	24'-6"	⋈
*** sp1102(E)	3	#7	52'-0"	⋈
*** sp1103(E)	3	#7	19'-10"	⋈
u1101(E)	22	#8	22'-5"	⌒
u1102(E)	40	#9	27'-11"	⌒
u1103(E)	12	#7	6'-9"	┐
u1104(E)	12	#7	6'-10"	┐
u1105(E)	20	#7	20'-8"	□
v1101(E)	66	#14	42'-6"	—
v1102(E)	66	#14	45'-1"	—
v1103(E)	132	#14	40'-0"	—
v1104(E)	132	#14	47'-7"	—
v1105(E)	120	#11	38'-5"	—
Concrete Structures			Cu. Yd.	492.9
Reinforcement Bars, Epoxy Coated			Pound	283,520
Permanent Casing			Foot	159
Drilled Shaft in Soil			Cu. Yd.	360
Drilled Shaft in Rock			Cu. Yd.	161
Crosshole Sonic Logging Access Ducts			Foot	229
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	229
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 16
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1601(E)	20	#8	56'-2"	—
h1602(E)	36	#9	38'-0"	—
h1603(E)	10	#6	31'-7"	—
h1604(E)	5	#5	5'-5"	—
h1605(E)	4	#5	3'-11"	⌒
hp1601(E)	99	#7	29'-2"	○
hp1602(E)	174	#7	24'-6"	○
n1601(E)	6	#5	3'-10"	┐
p1601(E)	26	#11	26'-0"	┐
p1602(E)	26	#11	51'-5"	┐
p1603(E)	26	#11	57'-9"	—
p1604(E)	22	#7	2'-11"	—
p1605(E)	28	#11	58'-2"	┐
p1606(E)	28	#11	57'-8"	┐
s1601(E)	86	#6	32'-0"	□
s1602(E)	66	#6	19'-4"	□
s1603(E)	66	#6	43'-4"	□
s1604(E)	106	#6	25'-0"	□
s1605(E)	86	#6	9'-4"	┐
s1606(E)	132	#6	13'-4"	┐
s1607(E)	48	#6	16'-6"	□
s1608(E)	47	#6	13'-2"	□
s1609(E)	13	#5	8'-2"	□
s1610(E)	8	#5	5'-5"	▯
*** sp1601(E)	3	#7	24'-6"	⋈
*** sp1602(E)	3	#7	68'-7"	⋈
*** sp1603(E)	3	#7	18'-10"	⋈
u1601(E)	22	#8	22'-5"	⌒
u1602(E)	40	#9	27'-11"	⌒
u1603(E)	12	#7	6'-9"	┐
u1604(E)	12	#7	6'-10"	┐
u1605(E)	20	#7	20'-8"	□
v1601(E)	66	#14	50'-10"	—
v1602(E)	66	#14	53'-4"	—
v1603(E)	132	#14	48'-4"	—
v1604(E)	132	#14	55'-10"	—
v1605(E)	120	#11	37'-5"	—
Concrete Structures			Cu. Yd.	487.7
Reinforcement Bars, Epoxy Coated			Pound	315,320
Permanent Casing			Foot	209
Drilled Shaft in Soil			Cu. Yd.	477
Drilled Shaft in Rock			Cu. Yd.	161
Crosshole Sonic Logging Access Ducts			Foot	279
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	279
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.


Notes:

For Pier Plan and Elevation, see sheets 211 thru 213 of 292.

For additional bar details, see sheets 214 and 215 of 292.


Pier 11 & 16 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (12,242 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.

The quantities and reinforcement detailing are based on the estimated top of competent rock and the estimated elevations shown and may change based on the actual elevations encountered at each shaft.

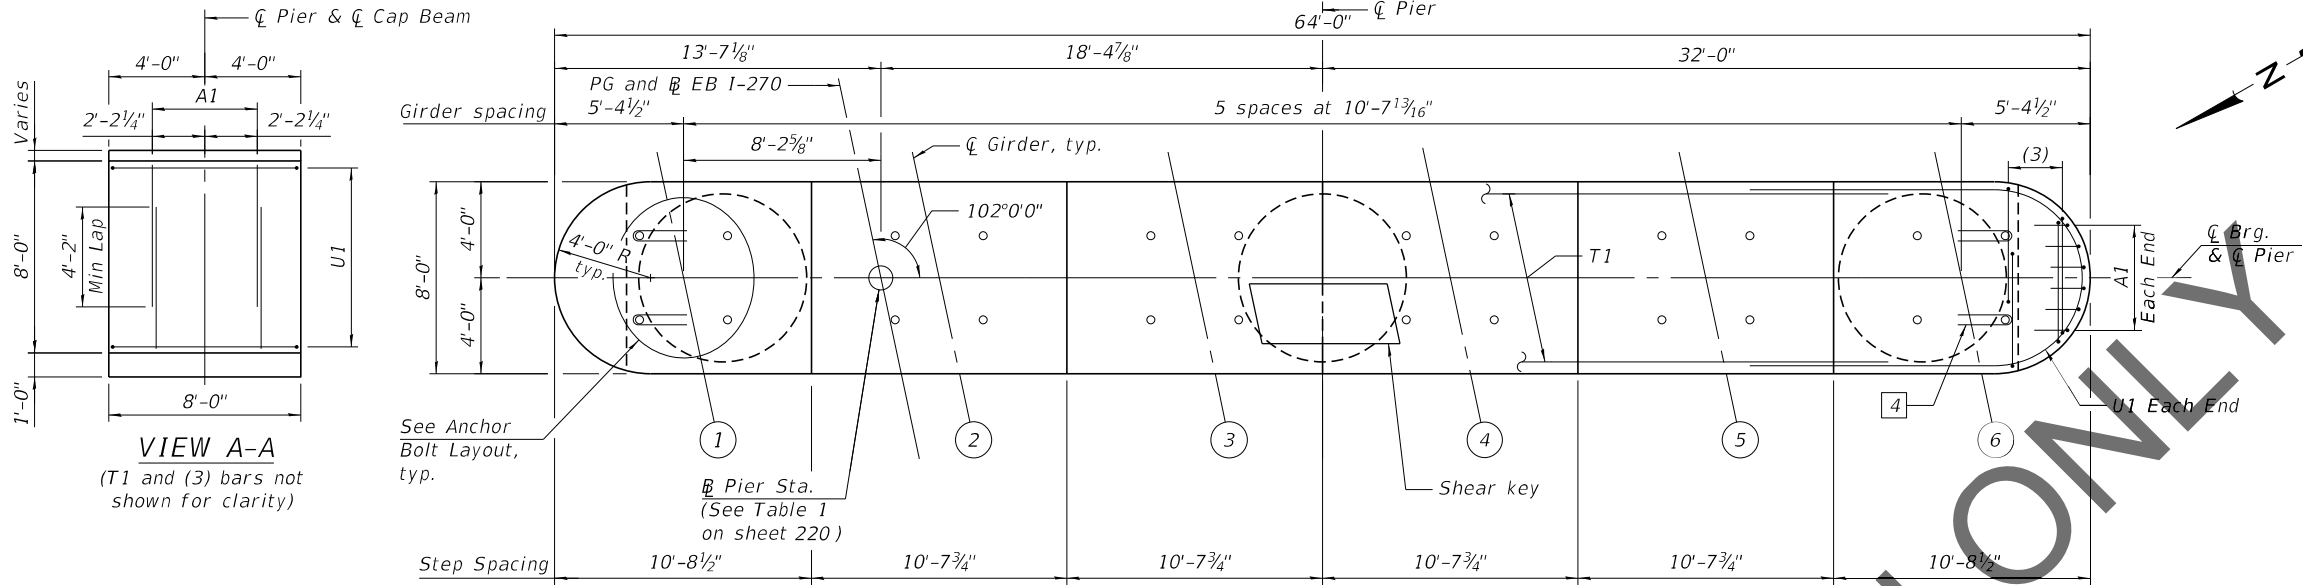

Notes:
Space reinforcement in cap to miss anchor bolts.
Pour steps monolithically with cap.


TOP PLAN

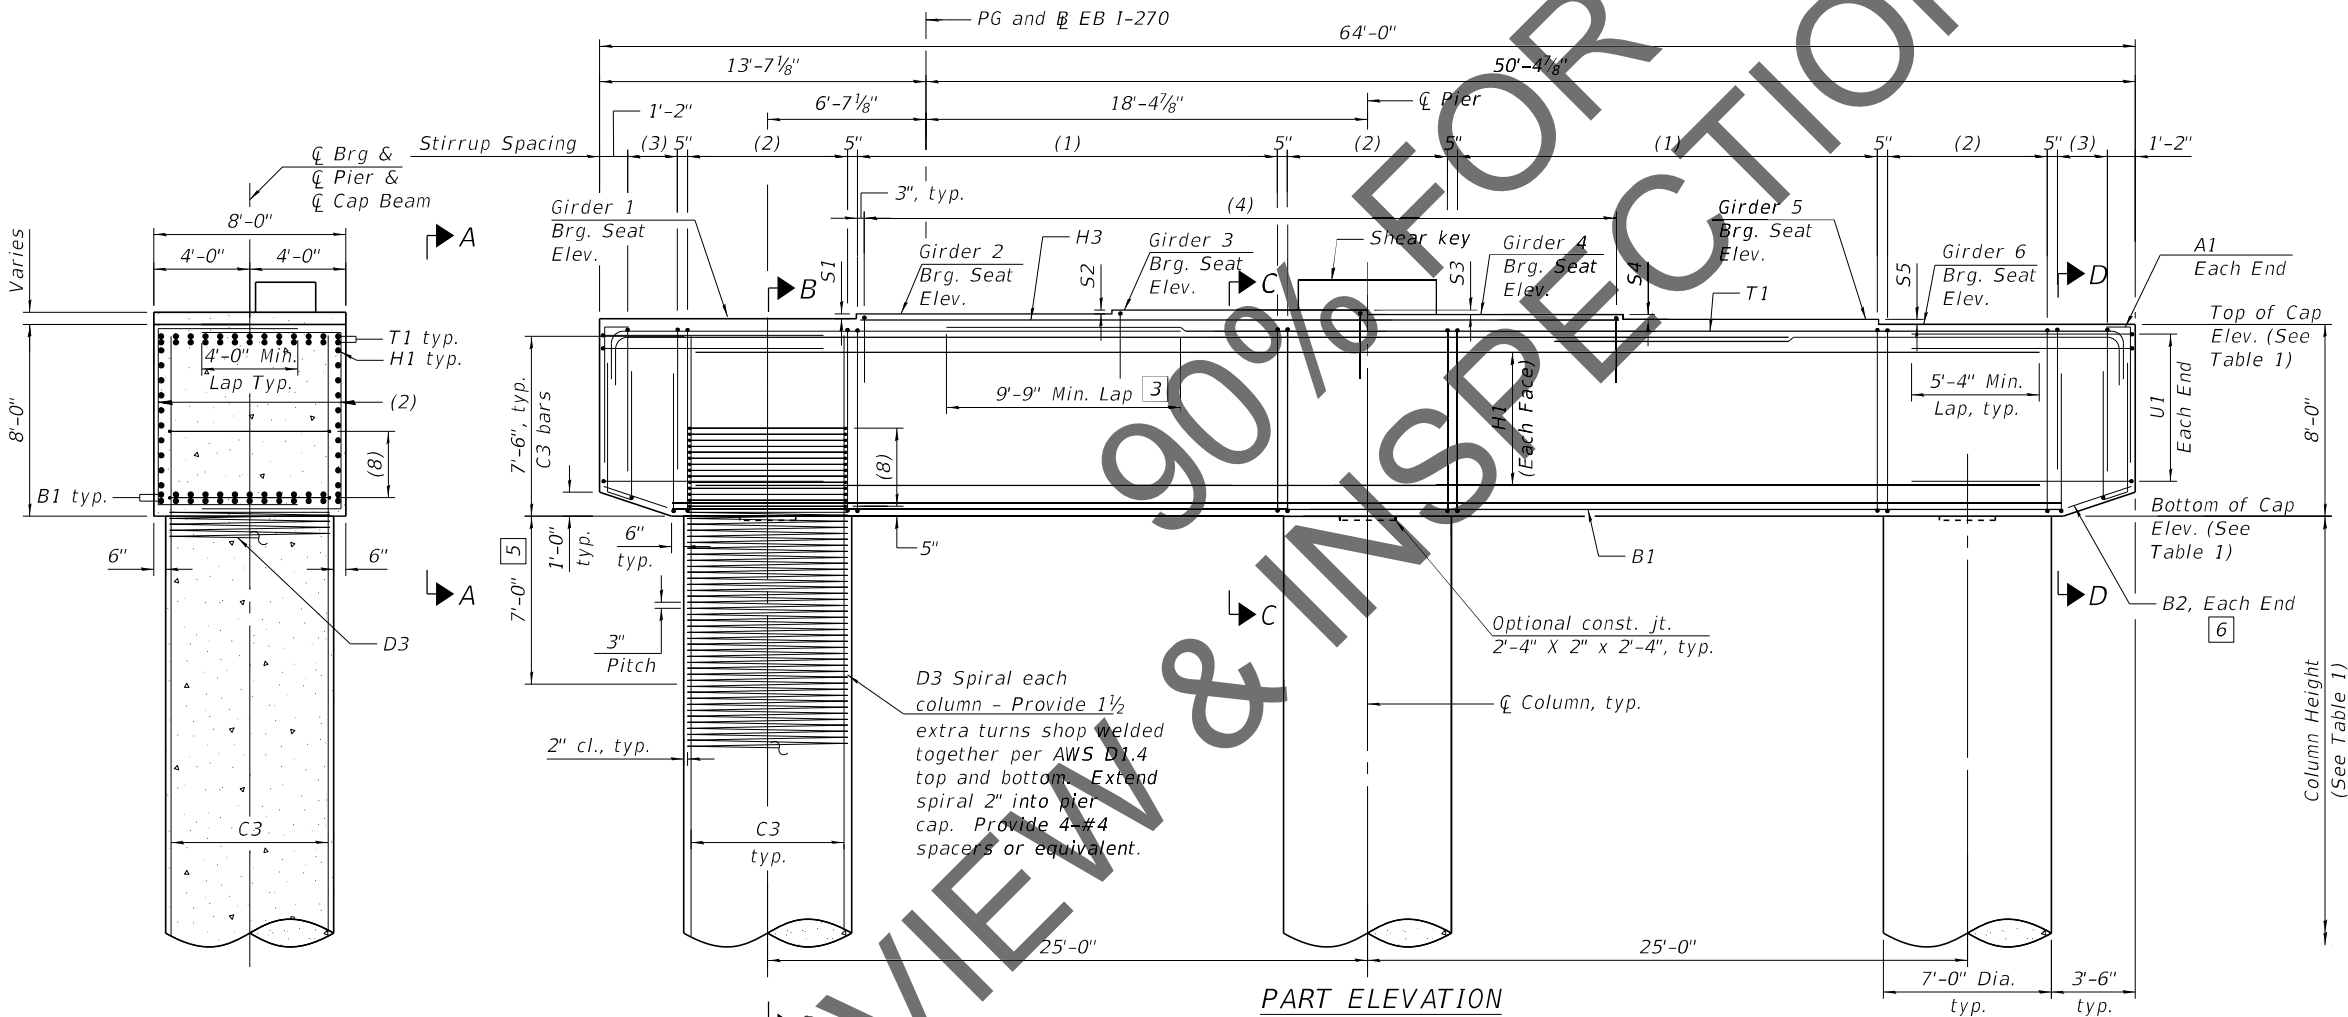


PART ELEVATION

(Looking East)


- [3] Alternate placement cap top rebars to stagger the laps
- [4] Provide 2 - R bar at each anchor shown. Place first R bar with top mat reinforcement and second R bar 6" below top U bar
- [5] No splicing of bars allowed in this region.
- [6] Field cut bars when needed to keep 2" clear concrete cover.

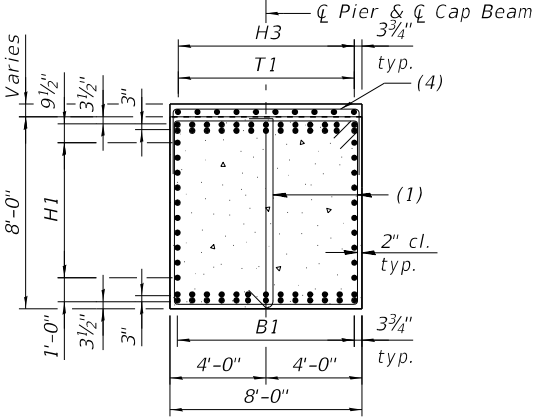

SECTION C-C

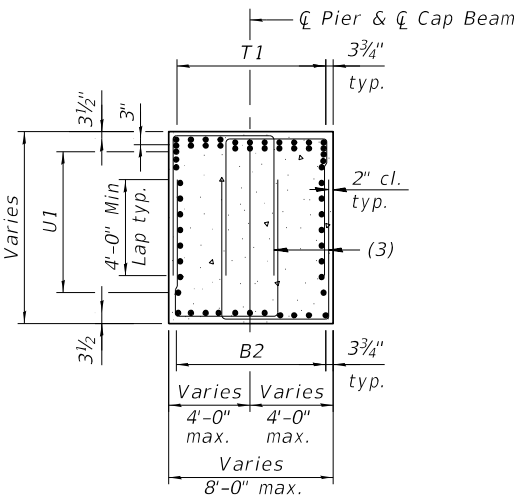

SECTION D-D

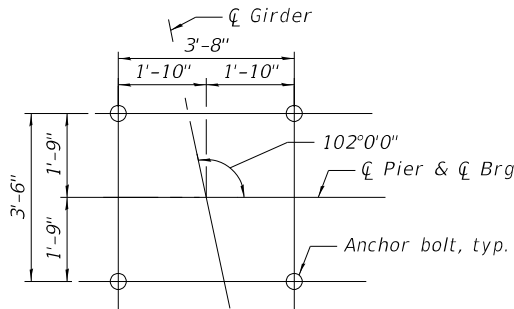

ANCHOR BOLTS LAYOUT

Notes:
For bar details and Bill of Materials see sheets 221 and 222 of 292.
For column height, step height and all Elevations, See Table 1 on sheet 220 of 292.
For bearing details, see sheet 159 of 292.
For bar callouts and shear key details, see sheet 220 of 292.



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 12 THRU 15 PLAN AND ELEVATION - 1
STRUCTURE NO. 060-0350 (EB)


SHEET 217 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	417
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				


USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -




EWSE Elev.
412.67

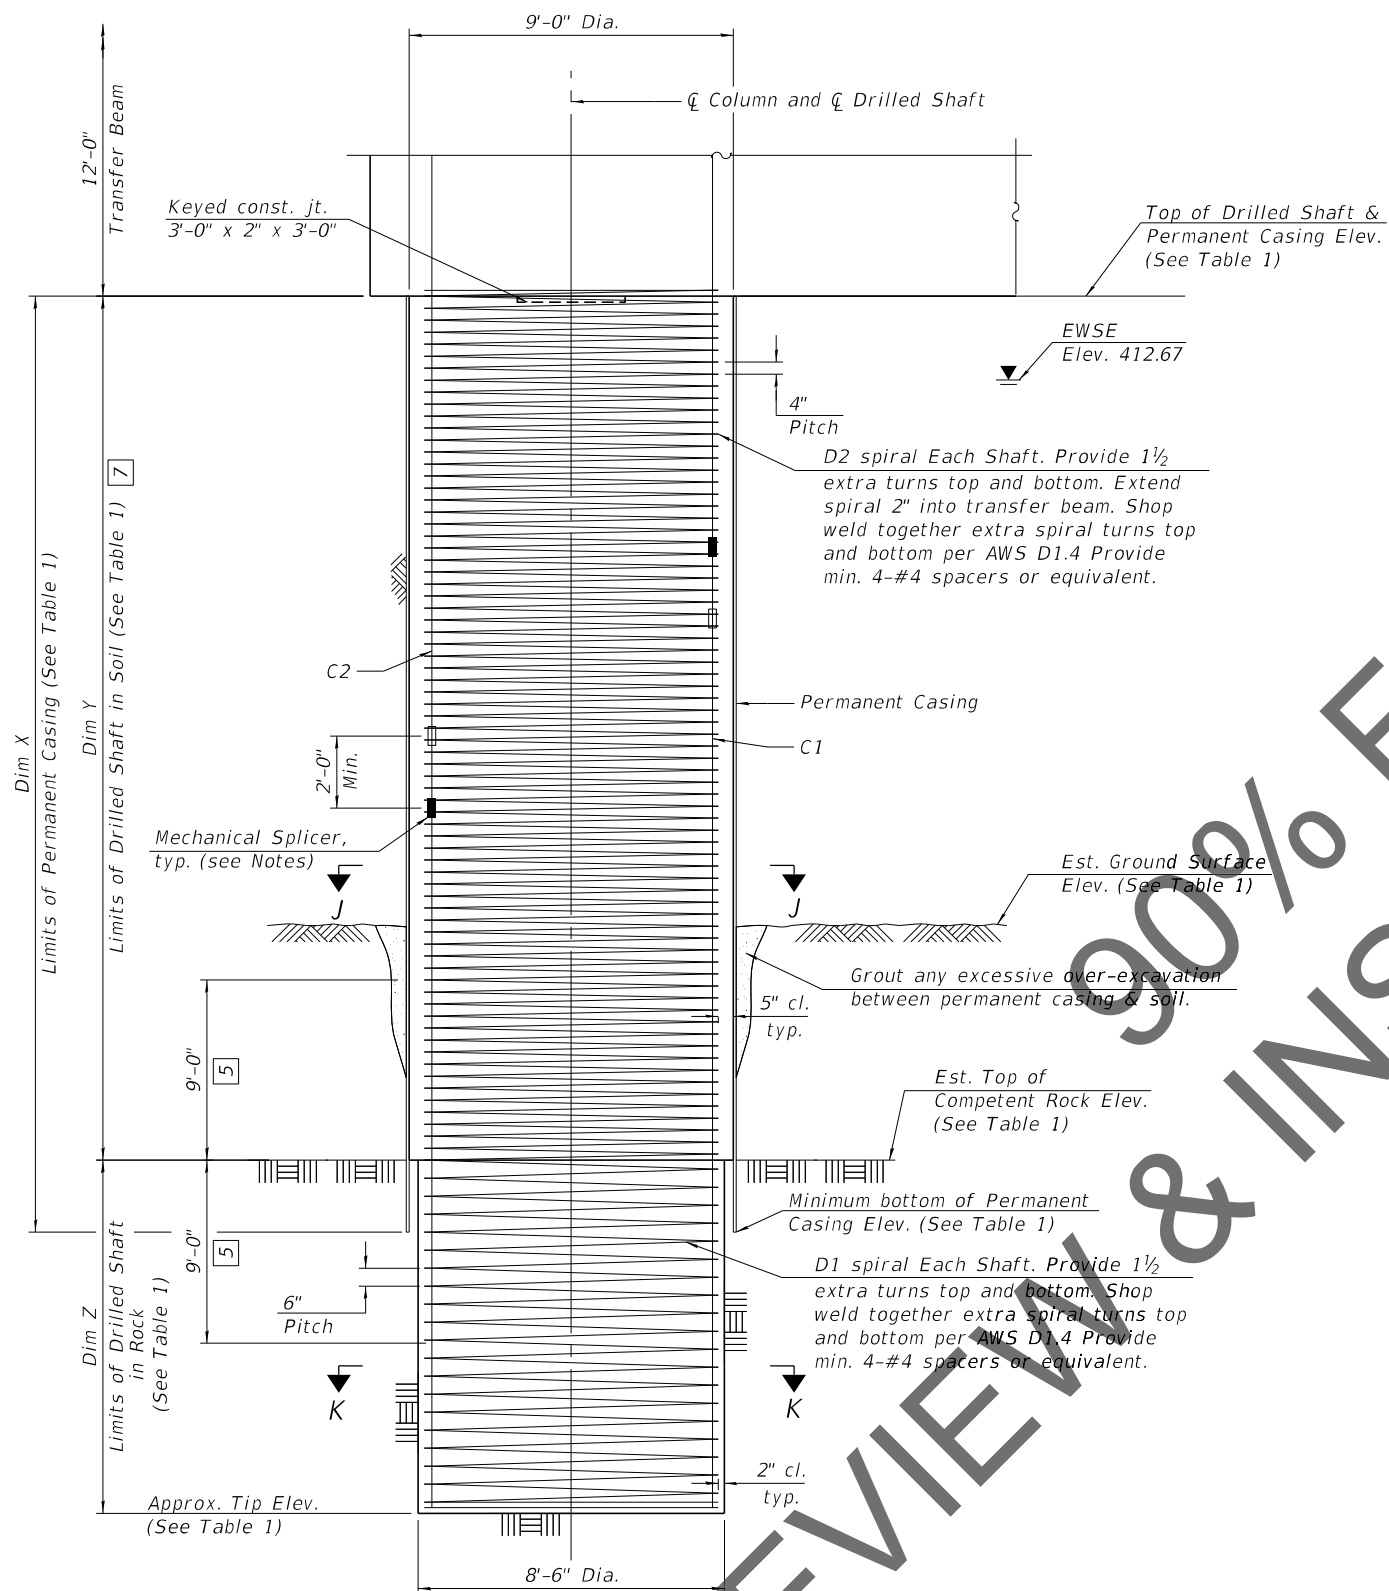

DRILLED SHAFT DETAIL
(One shaft shown, three shafts required,
one under each column)

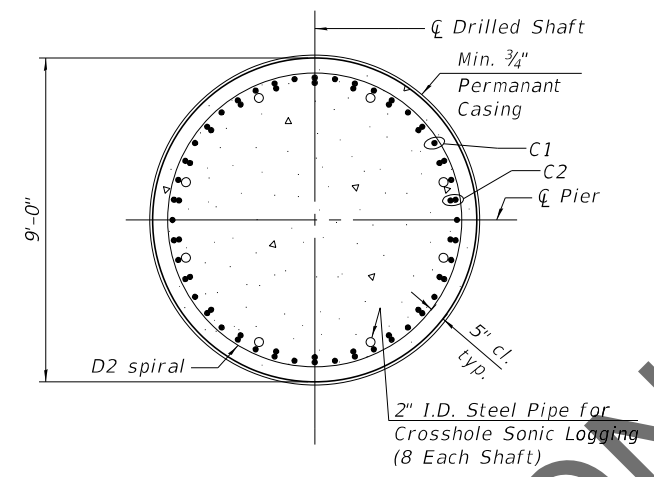

SECTION J-J

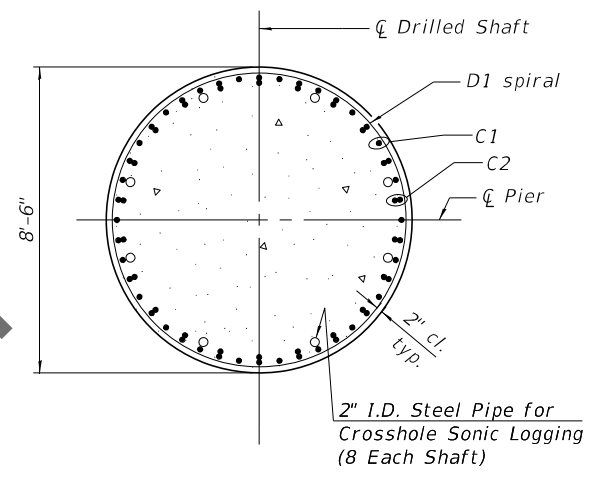

SECTION K-K

- 5 No splicing of bars allowed in this region.
- 7 If the prevailing water surface elevation during construction is consistently different than estimated on the plans, the contractor may propose an adjustment to the top of the drilled shaft elevation as part of their installation procedure. The top of all drilled shafts within a substructure unit shall be constructed to the same elevation and extend above the prevailing water surface. The quantities and reinforcement detailing are based on the top of shaft and the estimated elevations shown and may change based on the actual elevations encountered at each shaft and the final top of shaft elevation.

Notes:

For Pier Plan and Elevation, see Sheets 217 and 218 of 292.

For additional notes, bar details, and Bill of Materials, see sheets 221 and 222 of 292.

For Table 1, see sheet 220 of 292.

For Mechanical Splicer Details, see sheet 248 of 292.


The Contractor may propose a construction joint in the drilled shaft so separate pours can be made, if the shaft can be poured in the dry, subject to approval from the Engineer.

The Permanent Casing is shown embedded 2 ft. into rock for estimate of quantities. The Contractor is responsible for determining the casing thickness and the actual tip elevation to be used. See Article 516.06(d) of the Standard Specifications. Pay Limits for the Permanent Casing shall be based on the minimum length shown.

When splicing of spiral reinforcement is necessary, the spirals shall be provided with 1 1/2 extra turns at the ends to be spliced. These additional turns shall either be welded together according to AWS D1.4, or shall both terminate with a 135° standard hook.

Alternate location of mechanical splices of C1 bars every other bar.

Alternate location of mechanical splices of C2 bars within each bundle.

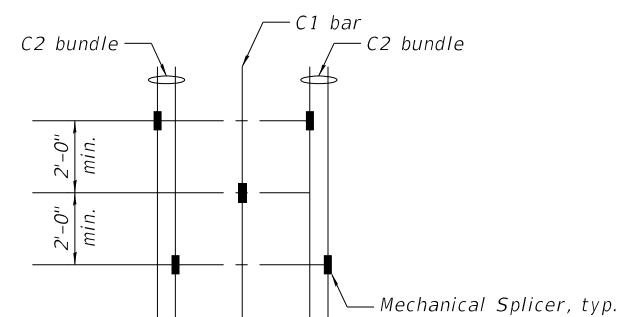


ALTERNATE MECHANICAL SPLICERS LOCATION

MODEL: Default
FILE NAME: C:\C54PDF\920345087_235\060-0350-D876\90-bxa-53aPPE.dgn
9/11/2021 4:49:01 PM

TABLE 1

		Pier 12	Pier 13	Pier 14	Pier 15
☐ Pier Station		1803+84.97	1806+20.97	1808+56.97	1810+92.97
Bearing Seat Elevation	Girder 1	456.02	456.98	456.08	454.90
	Girder 2	456.22	457.19	456.30	455.12
	Girder 3	456.38	457.36	456.48	455.30
	Girder 4	456.17	457.15	456.29	455.11
	Girder 5	455.95	456.94	456.09	454.91
	Girder 6	455.73	456.73	455.89	454.71
Top of Cap Elevation		455.73	456.73	455.89	454.71
Bottom of Cap Elevation		447.73	448.73	447.89	446.71
Column Height		20'-8¾"	21'-8¾"	20'-10⅝"	19'-8½"
Top of Shaft Elevation		415.00	415.00	415.00	415.00
Approx. Tip Elevation		338.80	321.20	316.90	315.20
Est. Ground Surface Elevation		367.80	363.80	365.00	369.20
Est. Top of Rock Elevation		364.30	346.70	342.40	340.70
Min. bottom of Permanent Casing Elevation		362.30	344.70	340.40	338.70
Dim X		52'-8⅝"	70'-3½"	74'-7⅛"	76'-3½"
Dim Y		50'-8⅝"	68'-3½"	72'-7⅛"	74'-3½"
Dim Z		25'-6"	25'-6"	25'-6"	25'-6"
S1		2 ⅜ "	2 ½ "	2 ⅝ "	2 ⅝ "
S2		1 ⅞ "	2"	2 ⅛ "	2 ⅛ "
S3		2 ½ "	2 ½ "	2 ¼ "	2 ¼ "
S4		2 ⅝ "	2 ½ "	2 ⅜ "	2 ⅜ "
S5		2 ⅝ "	2 ½ "	2 ⅝ "	2 ⅝ "

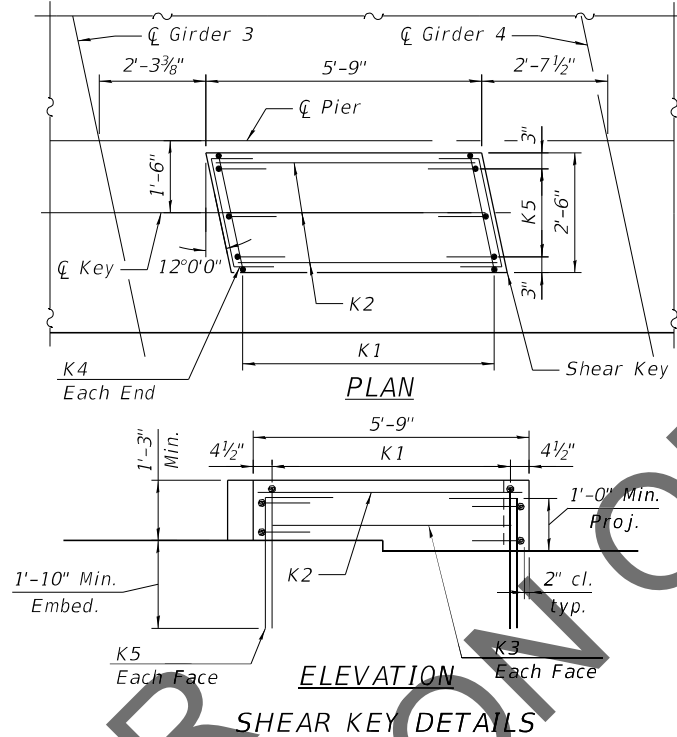

Notes:
For Pier Plan and Elevation, see sheets 217, 218and 219 of 292 .
For bar details, see sheet 221 of 292 .
For Bill of Material, see sheet 222 of 292 .

Pier 12		Pier 13		Pier 14		Pier 15	
Mark	Bar Callouts	Bar Callouts	Bar Callouts	Bar Callouts	Bar Callouts	Bar Callouts	Bar Callouts
(1)	43 sets of 1-#6 s1201(E) and 1-#6 s1205(E) at 5" cts.	43 sets of 1-#6 s1301(E) and 1-#6 s1305(E) at 5" cts.	43 sets of 1-#6 s1401(E) and 1-#6 s1405(E) at 5" cts.	43 sets of 1-#6 s1501(E) and 1-#6 s1505(E) at 5" cts.	43 sets of 1-#6 s1201(E) and 1-#6 s1205(E) at 5" cts.	43 sets of 1-#6 s1301(E) and 1-#6 s1305(E) at 5" cts.	43 sets of 1-#6 s1401(E) and 1-#6 s1405(E) at 5" cts.
(2)	11 sets of 2-#6 s1202(E) at 8" cts.	11 sets of 2-#6 s1302(E) at 8" cts.	11 sets of 2-#6 s1402(E) at 8" cts.	11 sets of 2-#6 s1502(E) at 8" cts.	11 sets of 2-#6 s1202(E) at 8" cts.	11 sets of 2-#6 s1302(E) at 8" cts.	11 sets of 2-#6 s1402(E) at 8" cts.
(3)	6 sets of 4-#6 s1207(E) at 5" cts.	6 sets of 4-#6 s1307(E) at 5" cts.	6 sets of 4-#6 s1407(E) at 5" cts.	6 sets of 4-#6 s1507(E) at 5" cts.	6 sets of 4-#6 s1207(E) at 5" cts.	6 sets of 4-#6 s1307(E) at 5" cts.	6 sets of 4-#6 s1407(E) at 5" cts.
(4)	47-#6 s1208(E) at abt. 8" cts.	47-#6 s1308(E) at abt. 8" cts.	47-#6 s1408(E) at abt. 8" cts.	47-#6 s1508(E) at abt. 8" cts.	47-#6 s1208(E) at abt. 8" cts.	47-#6 s1308(E) at abt. 8" cts.	47-#6 s1408(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s1203(E) and 2-#6 s1206(E) at 6" cts.	33 sets of 1-#6 s1303(E) and 2-#6 s1306(E) at 6" cts.	33 sets of 1-#6 s1403(E) and 2-#6 s1406(E) at 6" cts.	33 sets of 1-#6 s1503(E) and 2-#6 s1506(E) at 6" cts.	33 sets of 1-#6 s1203(E) and 2-#6 s1206(E) at 6" cts.	33 sets of 1-#6 s1303(E) and 2-#6 s1306(E) at 6" cts.	33 sets of 1-#6 s1403(E) and 2-#6 s1406(E) at 6" cts.
(6)	17 sets of 2-#6 s1204(E) at 6" cts	17 sets of 2-#6 s1304(E) at 6" cts	17 sets of 2-#6 s1404(E) at 6" cts	17 sets of 2-#6 s1504(E) at 6" cts	17 sets of 2-#6 s1204(E) at 6" cts	17 sets of 2-#6 s1304(E) at 6" cts	17 sets of 2-#6 s1404(E) at 6" cts
(7)	18 sets of 2-#6 s1204(E) at 6" cts.	18 sets of 2-#6 s1304(E) at 6" cts.	18 sets of 2-#6 s1404(E) at 6" cts.	18 sets of 2-#6 s1504(E) at 6" cts.	18 sets of 2-#6 s1204(E) at 6" cts.	18 sets of 2-#6 s1304(E) at 6" cts.	18 sets of 2-#6 s1404(E) at 6" cts.
(8)	14-#7 hp1202(E) hoops at 3"	14-#7 hp1302(E) hoops at 3"	14-#7 hp1402(E) hoops at 3"	14-#7 hp1502(E) hoops at 3"	14-#7 hp1202(E) hoops at 3"	14-#7 hp1302(E) hoops at 3"	14-#7 hp1402(E) hoops at 3"
(9)	44-#7 hp1202(E) hoops at 3"	44-#7 hp1302(E) hoops at 3"	44-#7 hp1402(E) hoops at 3"	44-#7 hp1502(E) hoops at 3"	44-#7 hp1202(E) hoops at 3"	44-#7 hp1302(E) hoops at 3"	44-#7 hp1402(E) hoops at 3"
(10)	33-#7 hp1201(E) hoops at 4"	33-#7 hp1301(E) hoops at 4"	33-#7 hp1401(E) hoops at 4"	33-#7 hp1501(E) hoops at 4"	33-#7 hp1201(E) hoops at 4"	33-#7 hp1301(E) hoops at 4"	33-#7 hp1401(E) hoops at 4"
T1	2 layers of 13-#11 p1201(E) or p1202(E) at 7⅝"	2 layers of 13-#11 p1301(E) or p1302(E) at 7⅝"	2 layers of 13-#11 p1401(E) or p1402(E) at 7⅝"	2 layers of 13-#11 p1501(E) or p1502(E) at 7⅝"	2 layers of 13-#11 p1201(E) or p1202(E) at 7⅝"	2 layers of 13-#11 p1301(E) or p1302(E) at 7⅝"	2 layers of 13-#11 p1401(E) or p1402(E) at 7⅝"
T2	14 bundles of 1-#11 p1205(E) (top) and 1-#11 p1206(E) (bot) at 12" max	14 bundles of 1-#11 p1305(E) (top) and 1-#11 p1306(E) (bot) at 12" max	14 bundles of 1-#11 p1405(E) (top) and 1-#11 p1406(E) (bot) at 12" max	14 bundles of 1-#11 p1505(E) (top) and 1-#11 p1506(E) (bot) at 12" max	14 bundles of 1-#11 p1205(E) (top) and 1-#11 p1206(E) (bot) at 12" max	14 bundles of 1-#11 p1305(E) (top) and 1-#11 p1306(E) (bot) at 12" max	14 bundles of 1-#11 p1405(E) (top) and 1-#11 p1406(E) (bot) at 12" max
B1	2 layers of 13-#11 p1203(E) at 7⅝"	2 layers of 13-#11 p1303(E) at 7⅝"	2 layers of 13-#11 p1403(E) at 7⅝"	2 layers of 13-#11 p1503(E) at 7⅝"	2 layers of 13-#11 p1203(E) at 7⅝"	2 layers of 13-#11 p1303(E) at 7⅝"	2 layers of 13-#11 p1403(E) at 7⅝"
B2	11-#7 p1204(E) at 7⅝"	11-#7 p1304(E) at 7⅝"	11-#7 p1404(E) at 7⅝"	11-#7 p1504(E) at 7⅝"	11-#7 p1204(E) at 7⅝"	11-#7 p1304(E) at 7⅝"	11-#7 p1404(E) at 7⅝"
B3	14 bundles of 1-#11 p1205(E) (bot) and 1-#11 p1206(E) (top) at 12" max	14 bundles of 1-#11 p1305(E) (bot) and 1-#11 p1306(E) (top) at 12" max	14 bundles of 1-#11 p1405(E) (bot) and 1-#11 p1406(E) (top) at 12" max	14 bundles of 1-#11 p1505(E) (bot) and 1-#11 p1506(E) (top) at 12" max	14 bundles of 1-#11 p1205(E) (bot) and 1-#11 p1206(E) (top) at 12" max	14 bundles of 1-#11 p1305(E) (bot) and 1-#11 p1306(E) (top) at 12" max	14 bundles of 1-#11 p1405(E) (bot) and 1-#11 p1406(E) (top) at 12" max
H1	10-#8 h1201(E) at 7½"	10-#8 h1301(E) at 7½"	10-#8 h1401(E) at 7½"	10-#8 h1501(E) at 7½"	10-#8 h1201(E) at 7½"	10-#8 h1301(E) at 7½"	10-#8 h1401(E) at 7½"
H2	18-#9 h1202(E) at 7"	18-#9 h1302(E) at 7"	18-#9 h1402(E) at 7"	18-#9 h1502(E) at 7"	18-#9 h1202(E) at 7"	18-#9 h1302(E) at 7"	18-#9 h1402(E) at 7"
H3	10-#6 h1203(E) at abt. 9¾"	10-#6 h1303(E) at abt. 9¾"	10-#6 h1403(E) at abt. 9¾"	10-#6 h1503(E) at abt. 9¾"	10-#6 h1203(E) at abt. 9¾"	10-#6 h1303(E) at abt. 9¾"	10-#6 h1403(E) at abt. 9¾"
A1	6 sets of 1-#7 u1203(E) and 1-#7 u1204(E) at 10½"	6 sets of 1-#7 u1303(E) and 1-#7 u1304(E) at 10½"	6 sets of 1-#7 u1403(E) and 1-#7 u1404(E) at 10½"	6 sets of 1-#7 u1503(E) and 1-#7 u1504(E) at 10½"	6 sets of 1-#7 u1203(E) and 1-#7 u1204(E) at 10½"	6 sets of 1-#7 u1303(E) and 1-#7 u1304(E) at 10½"	6 sets of 1-#7 u1403(E) and 1-#7 u1404(E) at 10½"
A2	10-#7 u1205(E) at 10¾"	10-#7 u1305(E) at 10¾"	10-#7 u1405(E) at 10¾"	10-#7 u1505(E) at 10¾"	10-#7 u1205(E) at 10¾"	10-#7 u1305(E) at 10¾"	10-#7 u1405(E) at 10¾"
U1	11-#8 u1201(E) space with h1201(E) and p1201(E)	11-#8 u1301(E) space with h1301(E) and p1301(E)	11-#8 u1401(E) space with h1401(E) and p1401(E)	11-#8 u1501(E) space with h1501(E) and p1501(E)	11-#8 u1201(E) space with h1201(E) and p1201(E)	11-#8 u1301(E) space with h1301(E) and p1301(E)	11-#8 u1401(E) space with h1401(E) and p1401(E)
U2	20-#9 u1202(E) splice with h1202(E) and space with p1205(E)	20-#9 u1302(E) splice with h1302(E) and space with p1305(E)	20-#9 u1402(E) splice with h1402(E) and space with p1405(E)	20-#9 u1502(E) splice with h1502(E) and space with p1505(E)	20-#9 u1202(E) splice with h1202(E) and space with p1205(E)	20-#9 u1302(E) splice with h1302(E) and space with p1305(E)	20-#9 u1402(E) splice with h1402(E) and space with p1405(E)
C1	22 sets of 1-#14 v1201(E) and 1-#14 v1202(E) alternate eq. spa.	22 sets of 1-#14 v1301(E) and 1-#14 v1302(E) alternate eq. spa.	22 sets of 1-#14 v1401(E) and 1-#14 v1402(E) alternate eq. spa.	22 sets of 1-#14 v1501(E) and 1-#14 v1502(E) alternate eq. spa.	22 sets of 1-#14 v1201(E) and 1-#14 v1202(E) alternate eq. spa.	22 sets of 1-#14 v1301(E) and 1-#14 v1302(E) alternate eq. spa.	22 sets of 1-#14 v1401(E) and 1-#14 v1402(E) alternate eq. spa.
C2	22 bundles of 2-#14 v1203(E) and 2-#14 v1204(E) alternate eq. spa.	22 bundles of 2-#14 v1303(E) and 2-#14 v1304(E) alternate eq. spa.	22 bundles of 2-#14 v1403(E) and 2-#14 v1404(E) alternate eq. spa.	22 bundles of 2-#14 v1503(E) and 2-#14 v1504(E) alternate eq. spa.	22 bundles of 2-#14 v1203(E) and 2-#14 v1204(E) alternate eq. spa.	22 bundles of 2-#14 v1303(E) and 2-#14 v1304(E) alternate eq. spa.	22 bundles of 2-#14 v1403(E) and 2-#14 v1404(E) alternate eq. spa.
C3	40-#11 v1205(E) eq. spa.	40-#11 v1305(E) eq. spa.	40-#11 v1405(E) eq. spa.	40-#11 v1505(E) eq. spa.	40-#11 v1205(E) eq. spa.	40-#11 v1305(E) eq. spa.	40-#11 v1405(E) eq. spa.
D1	#7 sp1201(E) at 6" pitch	#7 sp1301(E) at 6" pitch	#7 sp1401(E) at 6" pitch	#7 sp1501(E) at 6" pitch	#7 sp1201(E) at 6" pitch	#7 sp1301(E) at 6" pitch	#7 sp1401(E) at 6" pitch
D2	#7 sp1202(E) at 4" pitch	#7 sp1302(E) at 4" pitch	#7 sp1402(E) at 4" pitch	#7 sp1502(E) at 4" pitch	#7 sp1202(E) at 4" pitch	#7 sp1302(E) at 4" pitch	#7 sp1402(E) at 4" pitch
D3	#7 sp1203(E) at 3" pitch	#7 sp1303(E) at 3" pitch	#7 sp1403(E) at 3" pitch	#7 sp1503(E) at 3" pitch	#7 sp1203(E) at 3" pitch	#7 sp1303(E) at 3" pitch	#7 sp1403(E) at 3" pitch
K1	13-#5 s1209(E) spa. at 5"	13-#5 s1309(E) spa. at 5"	13-#5 s1409(E) spa. at 5"	13-#5 s1509(E) spa. at 5"	13-#5 s1209(E) spa. at 5"	13-#5 s1309(E) spa. at 5"	13-#5 s1409(E) spa. at 5"
K2	3-#5 h1204(E) spa. with n1201(E)	3-#5 h1304(E) spa. with n1301(E)	3-#5 h1404(E) spa. with n1401(E)	3-#5 h1504(E) spa. with n1501(E)	3-#5 h1204(E) spa. with n1201(E)	3-#5 h1304(E) spa. with n1301(E)	3-#5 h1404(E) spa. with n1401(E)
K3	1-#5 h1204(E) ea. face	1-#5 h1304(E) ea. face	1-#5 h1404(E) ea. face	1-#5 h1504(E) ea. face	1-#5 h1204(E) ea. face	1-#5 h1304(E) ea. face	1-#5 h1404(E) ea. face
K4	2-#5 h1205(E) ea. face	2-#5 h1305(E) ea. face	2-#5 h1405(E) ea. face	2-#5 h1505(E) ea. face	2-#5 h1205(E) ea. face	2-#5 h1305(E) ea. face	2-#5 h1405(E) ea. face
K5	3-#5 n1201(E) at 12" ea. face	3-#5 n1301(E) at 12" ea. face	3-#5 n1401(E) at 12" ea. face	3-#5 n1501(E) at 12" ea. face	3-#5 n1201(E) at 12" ea. face	3-#5 n1301(E) at 12" ea. face	3-#5 n1401(E) at 12" ea. face
R1	#5 s1210(E)	#5 s1310(E)	#5 s1410(E)	#5 s1510(E)	#5 s1210(E)	#5 s1310(E)	#5 s1410(E)

MODEL: Default
FILE NAME: C:\C54PDF\917545087_113\060-0350-D876\90-bxa-54aPRT.dgn
9/10/2021 4:41:28 PM



USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 12 THRU 15 REINFORCEMENT TABLES – 1
STRUCTURE NO. 060-0350 (EB)

SHEET 220 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	420
		CONTRACT NO. 76J90		
		ILLINOIS FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\C54PDF\917545087_114\060-0350-D876\90-bxa-55aPRT.dgn
9/10/2021 4:43:16 PM



HORNER SHIFFRIN

PARSONS

Teaming with:


USER NAME	=	DESIGNED	-	GX	REVISED	-
CHECKED	-	TMB	REVISED	-		
PLOT SCALE	=	DRAWN	-	JG	REVISED	-
PLOT DATE	=	CHECKED	-	TMB	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 12 THRU 15 REINFORCEMENT TABLES – 2
STRUCTURE NO. 060-0350 (EB)


SHEET 221 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	421
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				




BARS s1201(E) & s1203(E)
BARS s1301(E) & s1303(E)
BARS s1401(E) & s1403(E)
BARS s1501(E) & s1503(E)

Bars	A	B
s1201(E) thru s1501(E)	7' -8"	7' -8"
s1203(E) thru s1503(E)	11' -8"	9' -4"




BARS s1202(E) & s1204(E) & s1207(E)
BARS s1302(E) & s1304(E) & s1307(E)
BARS s1402(E) & s1404(E) & s1407(E)
BARS s1502(E) & s1504(E) & s1507(E)

Bars	A	B
s1202(E) thru s1502(E)	7' -8"	5' -10"
s1204(E) thru s1504(E)	11' -8"	6' -8"
s1207(E) thru s1507(E)	4' -10"	5' -10"




BARS s1205(E) & s1206(E)
BARS s1305(E) & s1306(E)
BARS s1405(E) & s1406(E)
BARS s1505(E) & s1506(E)

Bars	A
s1205(E) thru s1505(E)	7' -8"
s1206(E) thru s1506(E)	11' -8"

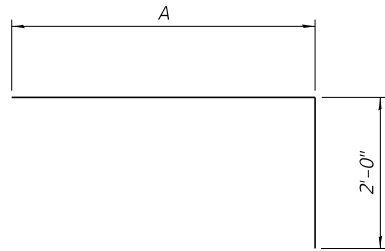


BARS p1201(E) & p1202(E)
BARS p1301(E) & p1302(E)
BARS p1401(E) & p1402(E)
BARS p1501(E) & p1502(E)

Bars	A
p1201(E) thru p1501(E)	24' -0"
p1202(E) thru p1502(E)	49' -5"




BARS p1205(E) & p1206(E)
BARS p1305(E) & p1306(E)
BARS p1405(E) & p1406(E)
BARS p1505(E) & p1506(E)


Bars	A
p1205(E) thru p1505(E)	54' -2"
p1206(E) thru p1506(E)	53' -8"




BARS u1203(E)
BARS u1303(E)
BARS u1403(E)
BARS u1503(E)



BARS u1204(E)
BARS u1304(E)
BARS u1404(E)
BARS u1504(E)




BARS s1210(E)
BARS s1310(E)
BARS s1410(E)
BARS s1510(E)

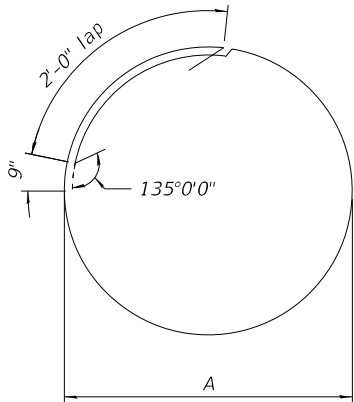


BARS hp1201(E) & hp1202(E)
BARS hp1301(E) & hp1302(E)
BARS hp1401(E) & hp1402(E)
BARS hp1501(E) & hp1502(E)

Bars	A
hp1201(E) thru hp1501(E)	8' -2"
hp1202(E) thru hp1502(E)	6' -8"




BARS u1201(E) & u1202(E)
BARS u1301(E) & u1302(E)
BARS u1401(E) & u1402(E)
BARS u1501(E) & u1502(E)

Bars	A	B	C	R
u1201(E) thru u1501(E)	5' -4"	11' -9"	5' -4"	3' -9"
u1202(E) thru u1502(E)	5' -9"	14' -5"	7' -9"	4' -7"




BARS u1205(E) & s1208(E)
BARS u1305(E) & s1308(E)
BARS u1405(E) & s1408(E)
BARS u1505(E) & s1508(E)


Bars	A	B
u1205(E) thru u1505(E)	4' -7"	11' -6"
s1208(E) thru s1508(E)	2' -9"	7' -8"



BARS s1209(E)
BARS s1309(E)
BARS s1409(E)
BARS s1509(E)

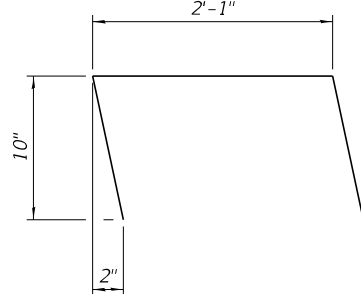

BARS h1205(E)
BARS h1305(E)
BARS h1405(E)
BARS h1505(E)



BARS n1201(E)
BARS n1301(E)
BARS n1401(E)
BARS n1501(E)

REVIEW & INSPECTION ONLY

Pier 12
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1201(E)	20	#8	56'-2"	—
h1202(E)	36	#9	38'-0"	—
h1203(E)	10	#6	31'-7"	—
h1204(E)	5	#5	5'-5"	—
h1205(E)	4	#5	3'-11"	⌒
hp1201(E)	99	#7	29'-2"	○
hp1202(E)	174	#7	24'-6"	○
n1201(E)	6	#5	3'-10"	┐
p1201(E)	26	#11	26'-0"	┐
p1202(E)	26	#11	51'-5"	┐
p1203(E)	26	#11	57'-9"	—
p1204(E)	22	#7	2'-11"	—
p1205(E)	28	#11	58'-2"	┐
p1206(E)	28	#11	57'-8"	┐
s1201(E)	86	#6	32'-0"	□
s1202(E)	66	#6	19'-4"	□
s1203(E)	66	#6	43'-4"	□
s1204(E)	106	#6	25'-0"	┐
s1205(E)	86	#6	9'-4"	┐
s1206(E)	132	#6	13'-4"	┐
s1207(E)	48	#6	16'-6"	┐
s1208(E)	47	#6	13'-2"	┐
s1209(E)	13	#5	8'-2"	┐
s1210(E)	8	#5	5'-5"	▬
sp1201(E)	3	#7	24'-6"	▬▬▬
sp1202(E)	3	#7	51'-11"	▬▬▬
sp1203(E)	3	#7	21'-1"	▬▬▬
u1201(E)	22	#8	22'-5"	⊏
u1202(E)	40	#9	27'-11"	⊏
u1203(E)	12	#7	6'-9"	┐
u1204(E)	12	#7	6'-10"	└
u1205(E)	20	#7	20'-8"	┐
v1201(E)	66	#14	42'-6"	—
v1202(E)	66	#14	45'-0"	—
v1203(E)	132	#14	40'-0"	—
v1204(E)	132	#14	47'-6"	—
v1205(E)	120	#11	39'-8"	—
Concrete Structures			Cu. Yd.	498.3
Reinforcement Bars, Epoxy Coated			Pound	284,790
Permanent Casing			Foot	159
Drilled Shaft in Soil			Cu. Yd.	359
Drilled Shaft in Rock			Cu. Yd.	161
Crosshole Sonic Logging Access Ducts			Foot	229
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	229
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 13
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1301(E)	20	#8	56'-2"	—
h1302(E)	36	#9	38'-0"	—
h1303(E)	10	#6	31'-7"	—
h1304(E)	5	#5	5'-5"	—
h1305(E)	4	#5	3'-11"	⌋
hp1301(E)	99	#7	29'-2"	○
hp1302(E)	174	#7	24'-6"	○
n1301(E)	6	#5	3'-10"	┐
p1301(E)	26	#11	26'-0"	⌋
p1302(E)	26	#11	51'-5"	⌋
p1303(E)	26	#11	57'-9"	—
p1304(E)	22	#7	2'-11"	—
p1305(E)	28	#11	58'-2"	⌋
p1306(E)	28	#11	57'-8"	⌋
s1301(E)	86	#6	32'-0"	□
s1302(E)	66	#6	19'-4"	□
s1303(E)	66	#6	43'-4"	□
s1304(E)	106	#6	25'-0"	□
s1305(E)	86	#6	9'-4"	□
s1306(E)	132	#6	13'-4"	⌋
s1307(E)	48	#6	16'-6"	□
s1308(E)	47	#6	13'-2"	□
s1309(E)	13	#5	8'-2"	□
s1310(E)	8	#5	5'-5"	▬
sp1301(E)	3	#7	24'-6"	▬▬▬
sp1302(E)	3	#7	69'-6"	▬▬▬
sp1303(E)	3	#7	22'-1"	▬▬▬
u1301(E)	22	#8	22'-5"	⊏
u1302(E)	40	#9	27'-11"	⊏
u1303(E)	12	#7	6'-9"	┐
u1304(E)	12	#7	6'-10"	┐
u1305(E)	20	#7	20'-8"	┐
v1301(E)	66	#14	51'-4"	—
v1302(E)	66	#14	53'-9"	—
v1303(E)	132	#14	48'-10"	—
v1304(E)	132	#14	56'-3"	—
v1305(E)	120	#11	40'-8"	—
Concrete Structures			Cu. Yd.	502.2
Reinforcement Bars, Epoxy Coated			Pound	320,880
Permanent Casing			Foot	211
Drilled Shaft in Soil			Cu. Yd.	483
Drilled Shaft in Rock			Cu. Yd.	161
Crosshole Sonic Logging Access Ducts			Foot	281
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	281
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 14
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1401(E)	20	#8	56'-2"	—
h1402(E)	36	#9	38'-0"	—
h1403(E)	10	#6	31'-7"	—
h1404(E)	5	#5	5'-5"	—
h1405(E)	4	#5	3'-11"	⌒
hp1401(E)	99	#7	29'-2"	○
hp1402(E)	174	#7	24'-6"	○
n1401(E)	6	#5	3'-10"	└
p1401(E)	26	#11	26'-0"	└
p1402(E)	26	#11	51'-5"	└
p1403(E)	26	#11	57'-9"	—
p1404(E)	22	#7	2'-11"	—
p1405(E)	28	#11	58'-2"	└
p1406(E)	28	#11	57'-8"	└
s1401(E)	86	#6	32'-0"	□
s1402(E)	66	#6	19'-4"	□
s1403(E)	66	#6	43'-4"	□
s1404(E)	106	#6	25'-0"	└
s1405(E)	86	#6	9'-4"	└
s1406(E)	132	#6	13'-4"	└
s1407(E)	48	#6	16'-6"	└
s1408(E)	47	#6	13'-2"	└
s1409(E)	13	#5	8'-2"	└
s1410(E)	8	#5	5'-5"	U
sp1401(E)	3	#7	24'-6"	⚡
sp1402(E)	3	#7	73'-10"	⚡
sp1403(E)	3	#7	21'-3"	⚡
u1401(E)	22	#8	22'-5"	⊂
u1402(E)	40	#9	27'-11"	⊂
u1403(E)	12	#7	6'-9"	└
u1404(E)	12	#7	6'-10"	└
u1405(E)	20	#7	20'-8"	└
v1401(E)	66	#14	53'-6"	—
v1402(E)	66	#14	55'-11"	—
v1403(E)	132	#14	51'-0"	—
v1404(E)	132	#14	58'-5"	—
v1405(E)	120	#11	39'-10"	—
Concrete Structures			Cu. Yd.	498
Reinforcement Bars, Epoxy Coated			Pound	328,530
Permanent Casing			Foot	224
Drilled Shaft in Soil			Cu. Yd.	514
Drilled Shaft in Rock			Cu. Yd.	161
Crosshole Sonic Logging Access Ducts			Foot	294
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	294
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 15
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1501(E)	20	#8	56'-2"	—
h1502(E)	36	#9	38'-0"	—
h1503(E)	10	#6	31'-7"	—
h1504(E)	5	#5	5'-5"	—
h1505(E)	4	#5	3'-11"	⌋
hp1501(E)	99	#7	29'-2"	○
hp1502(E)	174	#7	24'-6"	○
n1501(E)	6	#5	3'-10"	┐
p1501(E)	26	#11	26'-0"	┐
p1502(E)	26	#11	51'-5"	┐
p1503(E)	26	#11	57'-9"	—
p1504(E)	22	#7	2'-11"	—
p1505(E)	28	#11	58'-2"	┐
p1506(E)	28	#11	57'-8"	┐
s1501(E)	86	#6	32'-0"	□
s1502(E)	66	#6	19'-4"	□
s1503(E)	66	#6	43'-4"	□
s1504(E)	106	#6	25'-0"	┐
s1505(E)	86	#6	9'-4"	┐
s1506(E)	132	#6	13'-4"	┐
s1507(E)	48	#6	16'-6"	┐
s1508(E)	47	#6	13'-2"	┐
s1509(E)	13	#5	8'-2"	┐
s1510(E)	8	#5	5'-5"	⌋
sp1501(E)	3	#7	24'-6"	⌋
sp1502(E)	3	#7	75'-6"	⌋
sp1503(E)	3	#7	20'-1"	⌋
u1501(E)	22	#8	22'-5"	┐
u1502(E)	40	#9	27'-11"	┐
u1503(E)	12	#7	6'-9"	┐
u1504(E)	12	#7	6'-10"	┐
u1505(E)	20	#7	20'-8"	┐
v1501(E)	66	#14	54'-4"	—
v1502(E)	66	#14	56'-9"	—
v1503(E)	132	#14	51'-10"	—
v1504(E)	132	#14	59'-3"	—
v1505(E)	120	#11	38'-8"	—
Concrete Structures			Cu. Yd.	493
Reinforcement Bars, Epoxy Coated			Pound	330,500
Permanent Casing			Foot	229
Drilled Shaft in Soil			Cu. Yd.	526
Drilled Shaft in Rock			Cu. Yd.	161
Crosshole Sonic Logging Access Ducts			Foot	299
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	299
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Notes:


For Pier Plan and Elevation, see sheets 217 thru 219 of 292.

For additional bar details, see sheets 220 and 221 of 292.

Pier 12, 13 & 14 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (12,242 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.


Pier 15 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (9,709 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.

The quantities and reinforcement detailing are based on the estimated top of competent rock and the estimated elevations shown and may change based on the actual elevations encountered at each shaft.

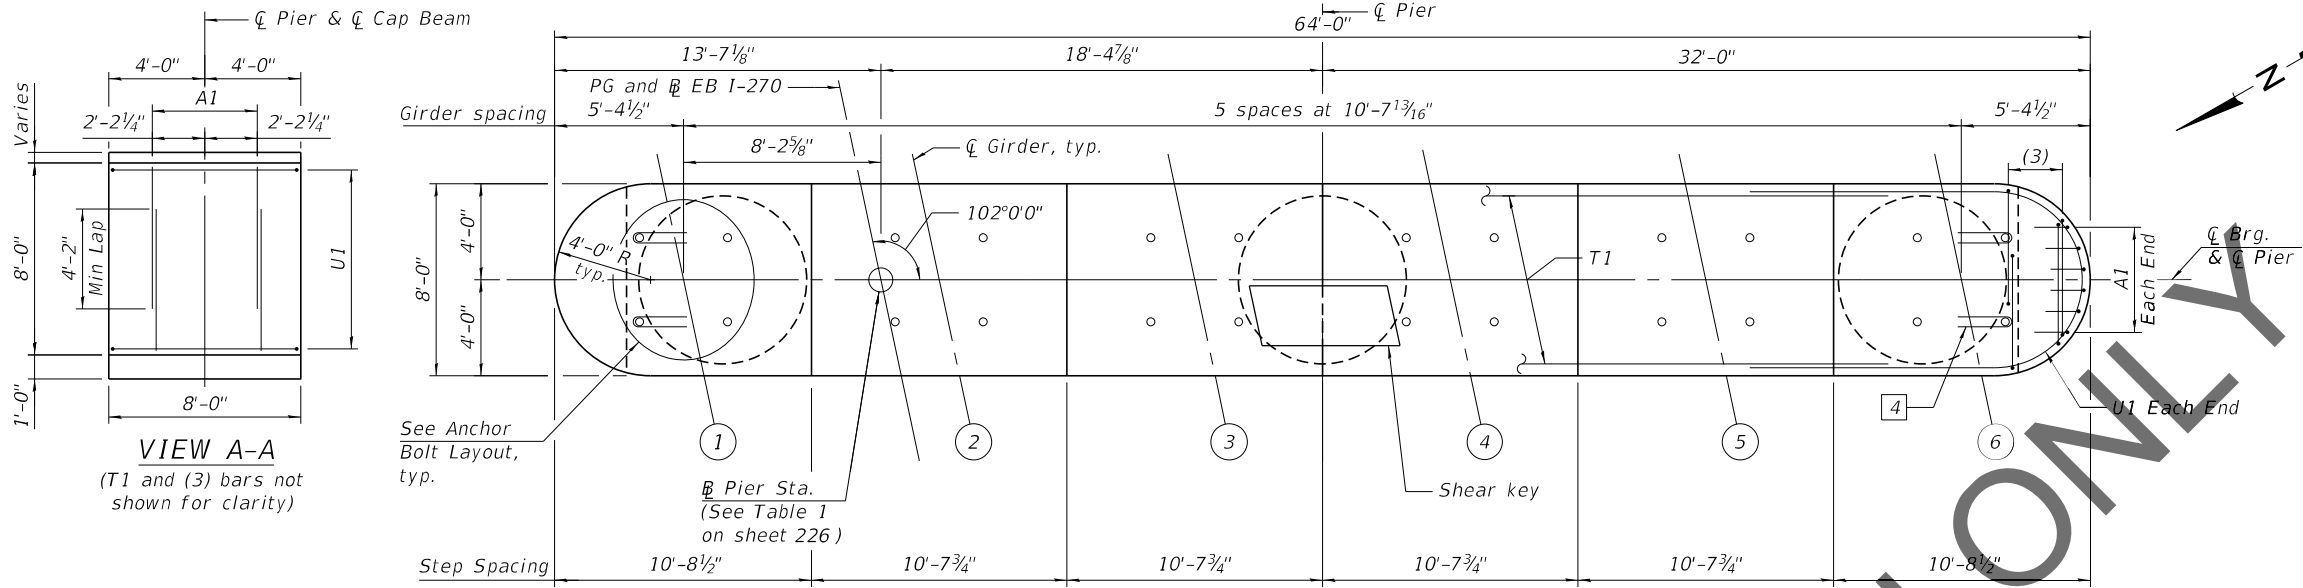


Notes:
Space reinforcement in cap to miss anchor bolts.
Pour steps monolithically with cap.


TOP PLAN

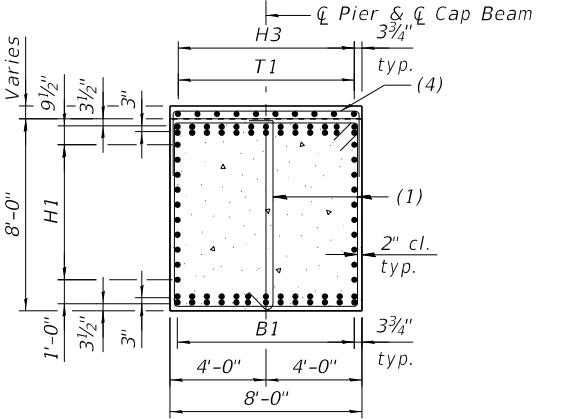

SECTION C-C

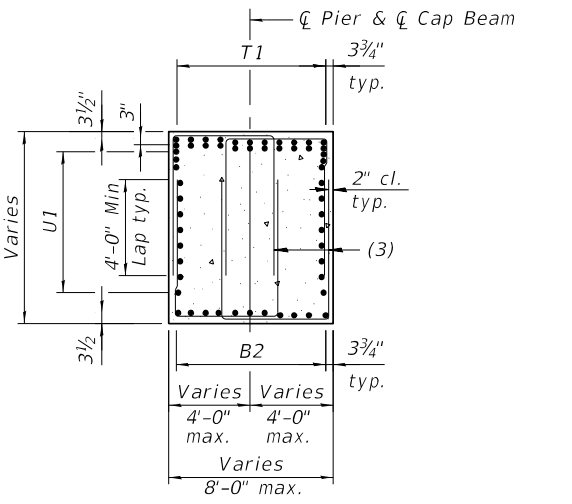

SECTION D-D

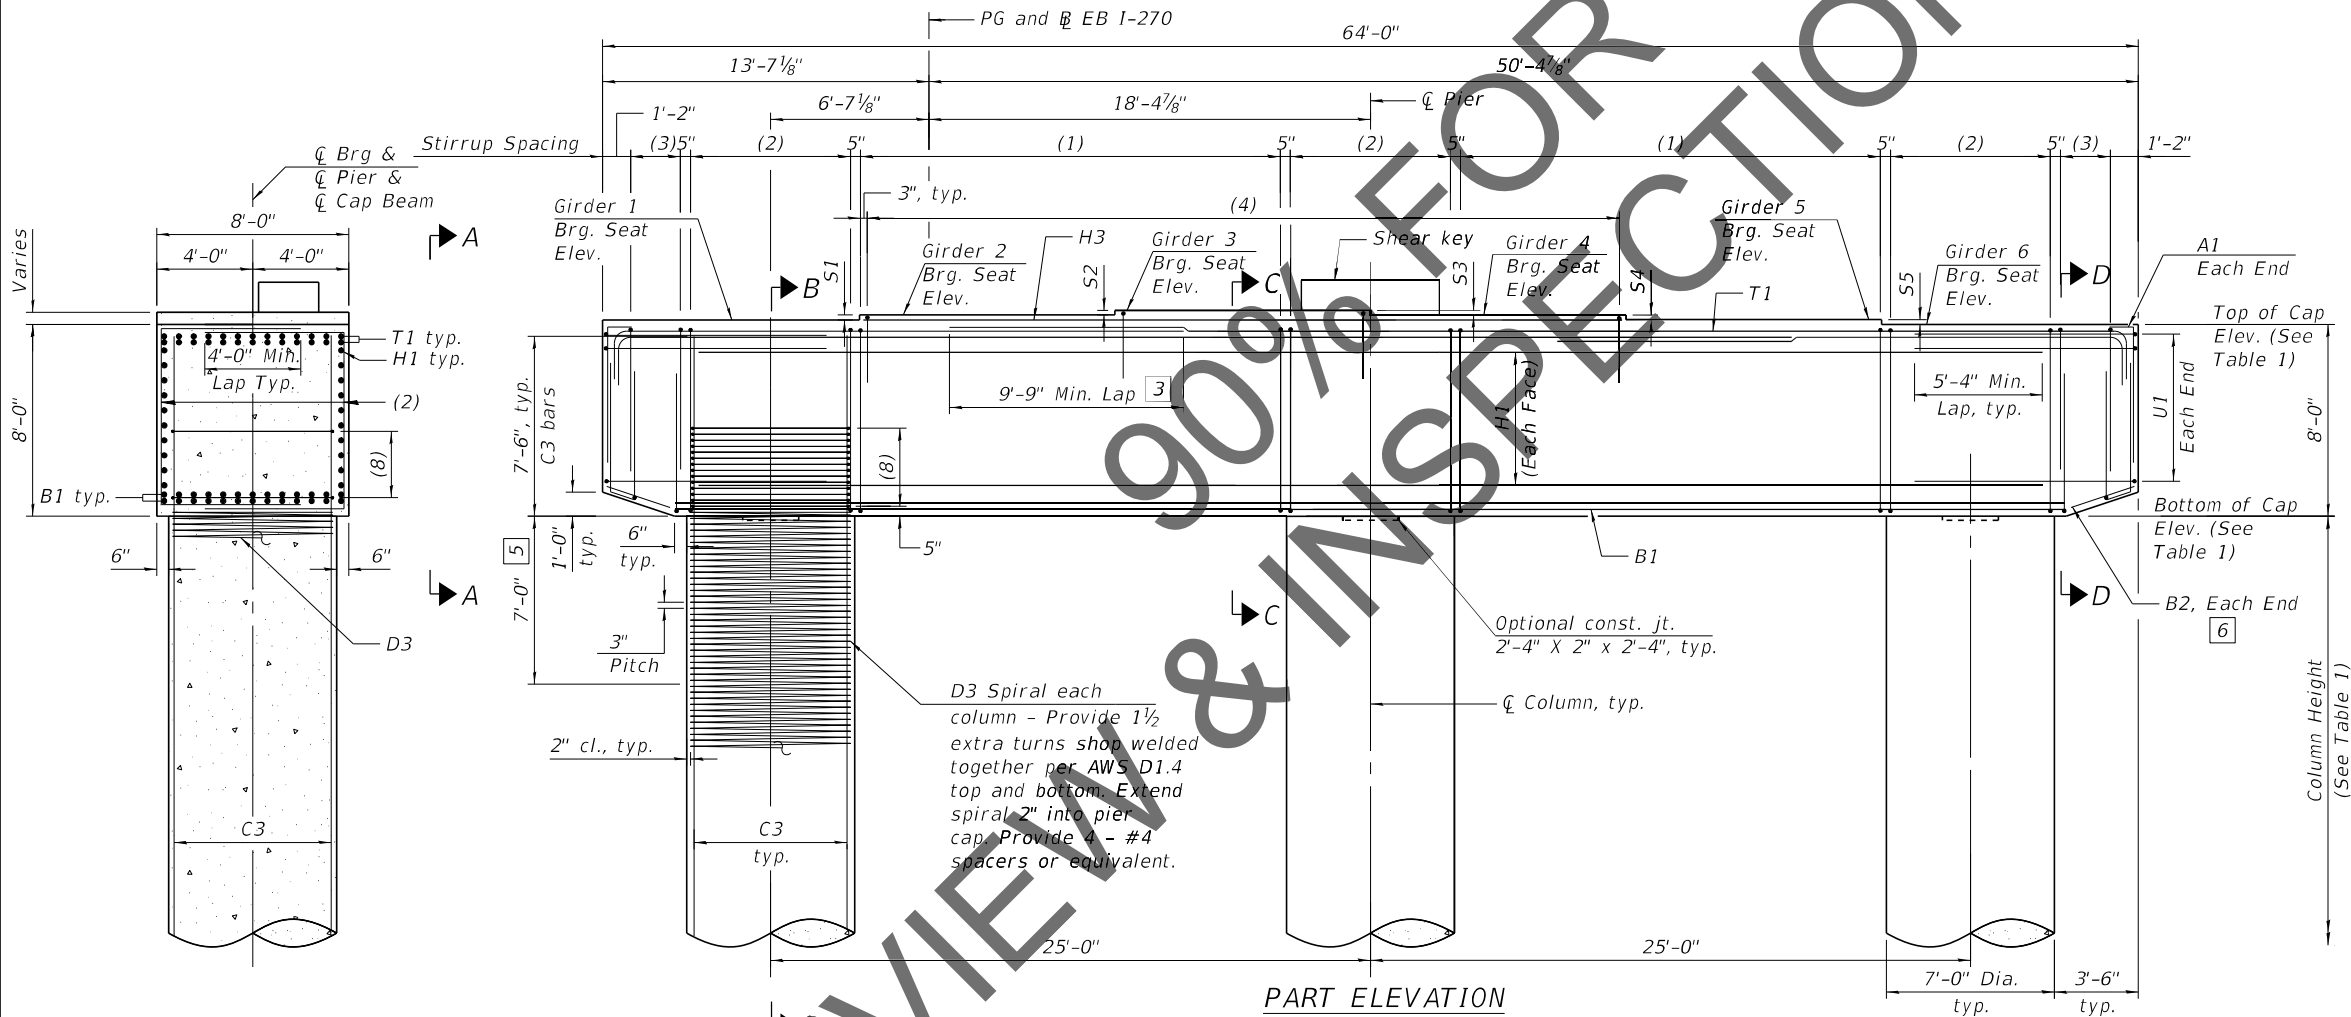


PART ELEVATION

(Looking East)

- [3] Alternate placement cap top rebars to stagger the laps
- [4] Provide 2 - R bar at each anchor shown. Place first R bar with top mat reinforcement and second R bar 6" below top U bar
- [5] No splicing of bars allowed in this region.
- [6] Field cut bars when needed to keep 2" clear concrete cover.

Notes:
For bar details and Bill of Materials see sheets 227 and 228 of 292 .
For column height, step height and all Elevations, See Table 1 on sheet 226 of 292 .
For bearing details, see sheet 160 of 292 .
For bar callouts and shear key details, see sheet 226 of 292 .

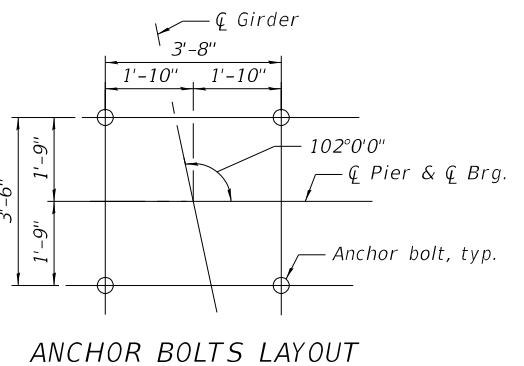

ANCHOR BOLTS LAYOUT

MODEL: Default
FILE NAME: C:\C54PDF\920345087_255\060-0350-0876\90-bypa-57apPE.dgn
9/11/2021 4:49:13 PM

HORNER SHIFRIN
PARSONS


USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


PIER 18 & 23 PLAN AND ELEVATION - 1
STRUCTURE NO. 060-0350 (EB)

SHEET 223 OF 292 SHEETS


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	423
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

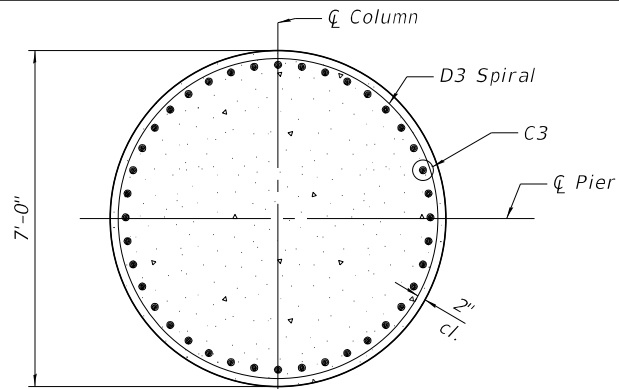


SECTION E-E

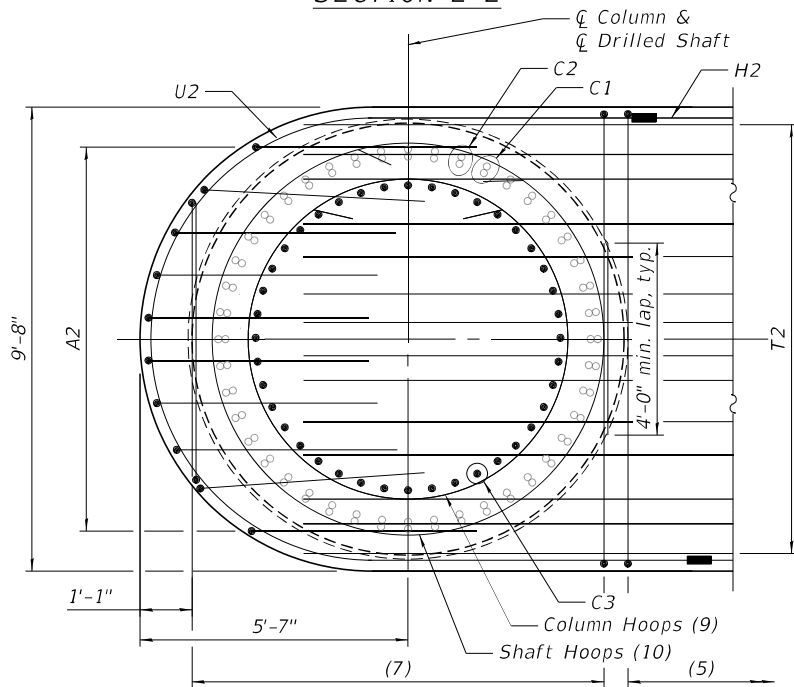


SECTION F-F

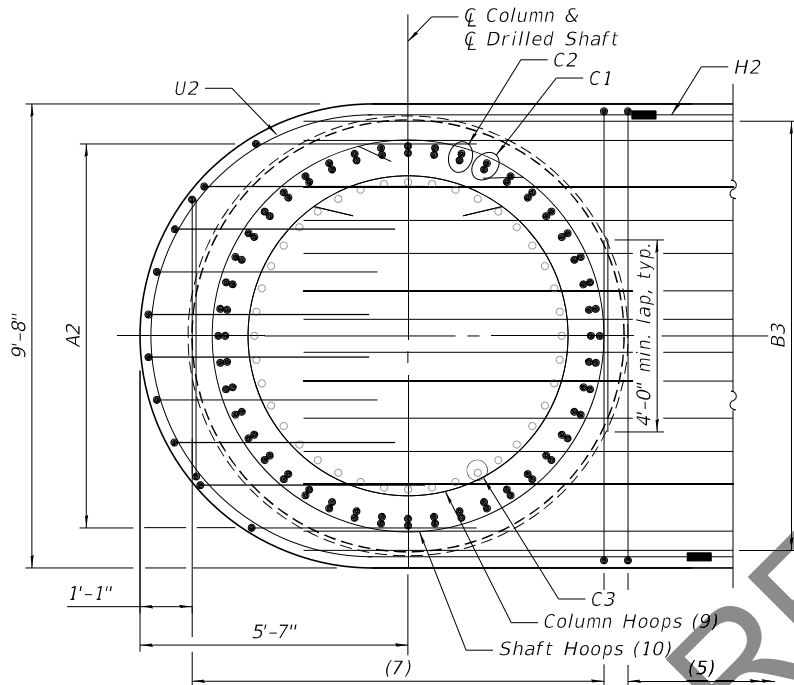


SECTION G-G

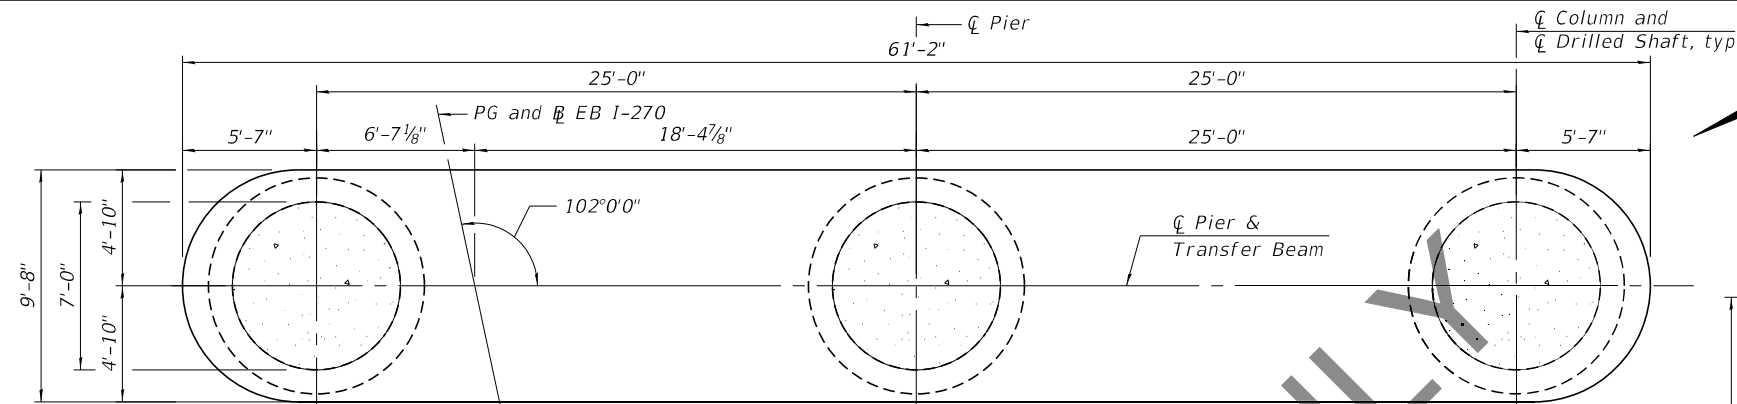

PLAN - TRANSFER BEAM

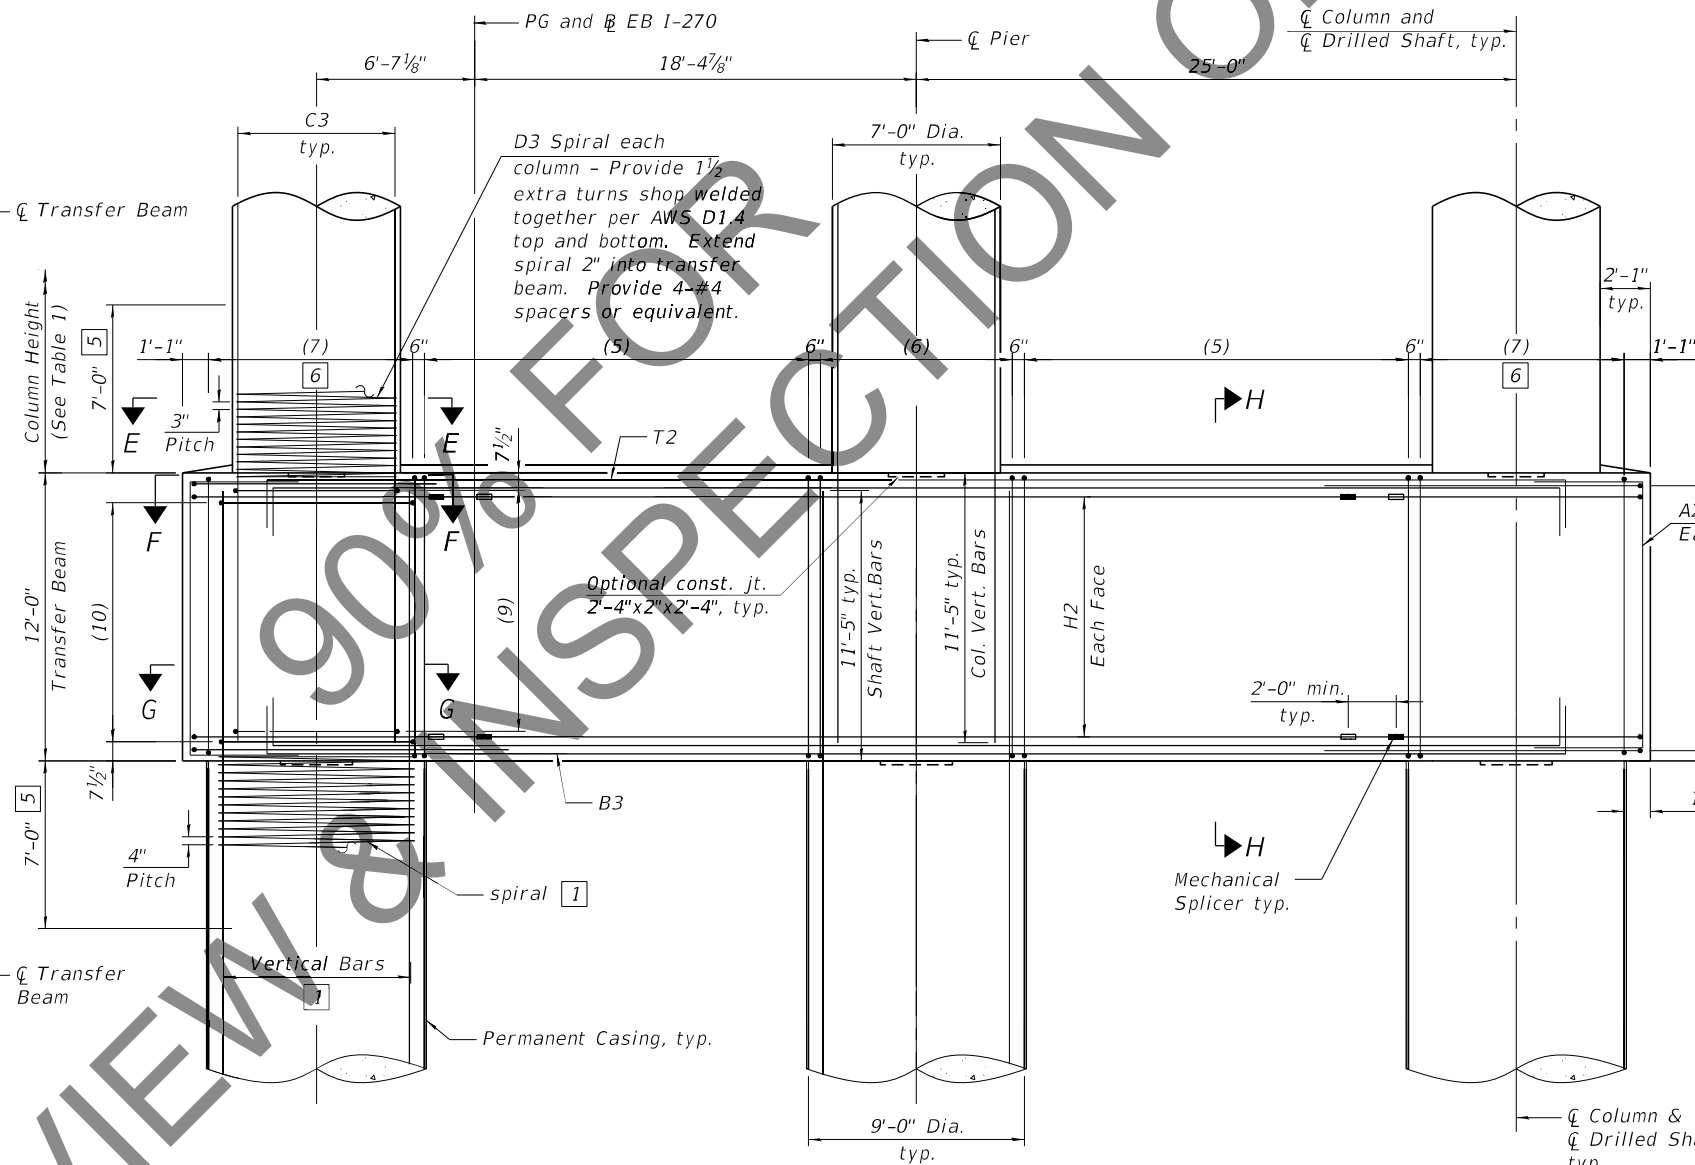

PART ELEVATION - TRANSFER BEAM
(Looking East)

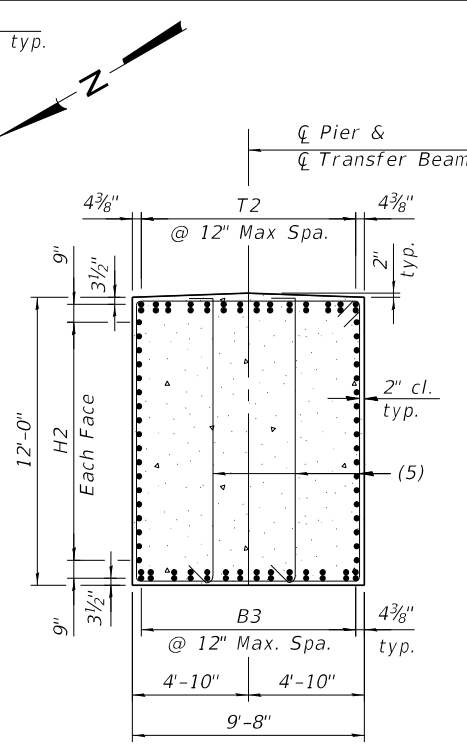


SECTION H-H


Design HWE
Elev. 433.4

Top of Drilled Shaft
Elev. (see Table 1)
EWSE Elev.
412.67

Notes:
For Top Plan and Part Elevation, see sheet 223 of 292.
For Drilled Shaft Details, see sheet 225 of 292.
For additional notes, bar details, and Bill of Material, see sheets 226, 227 and 228 of 292.
For Table 1, see sheet 226 of 292.
For Mechanical Splicer details, see sheet 248 of 292.

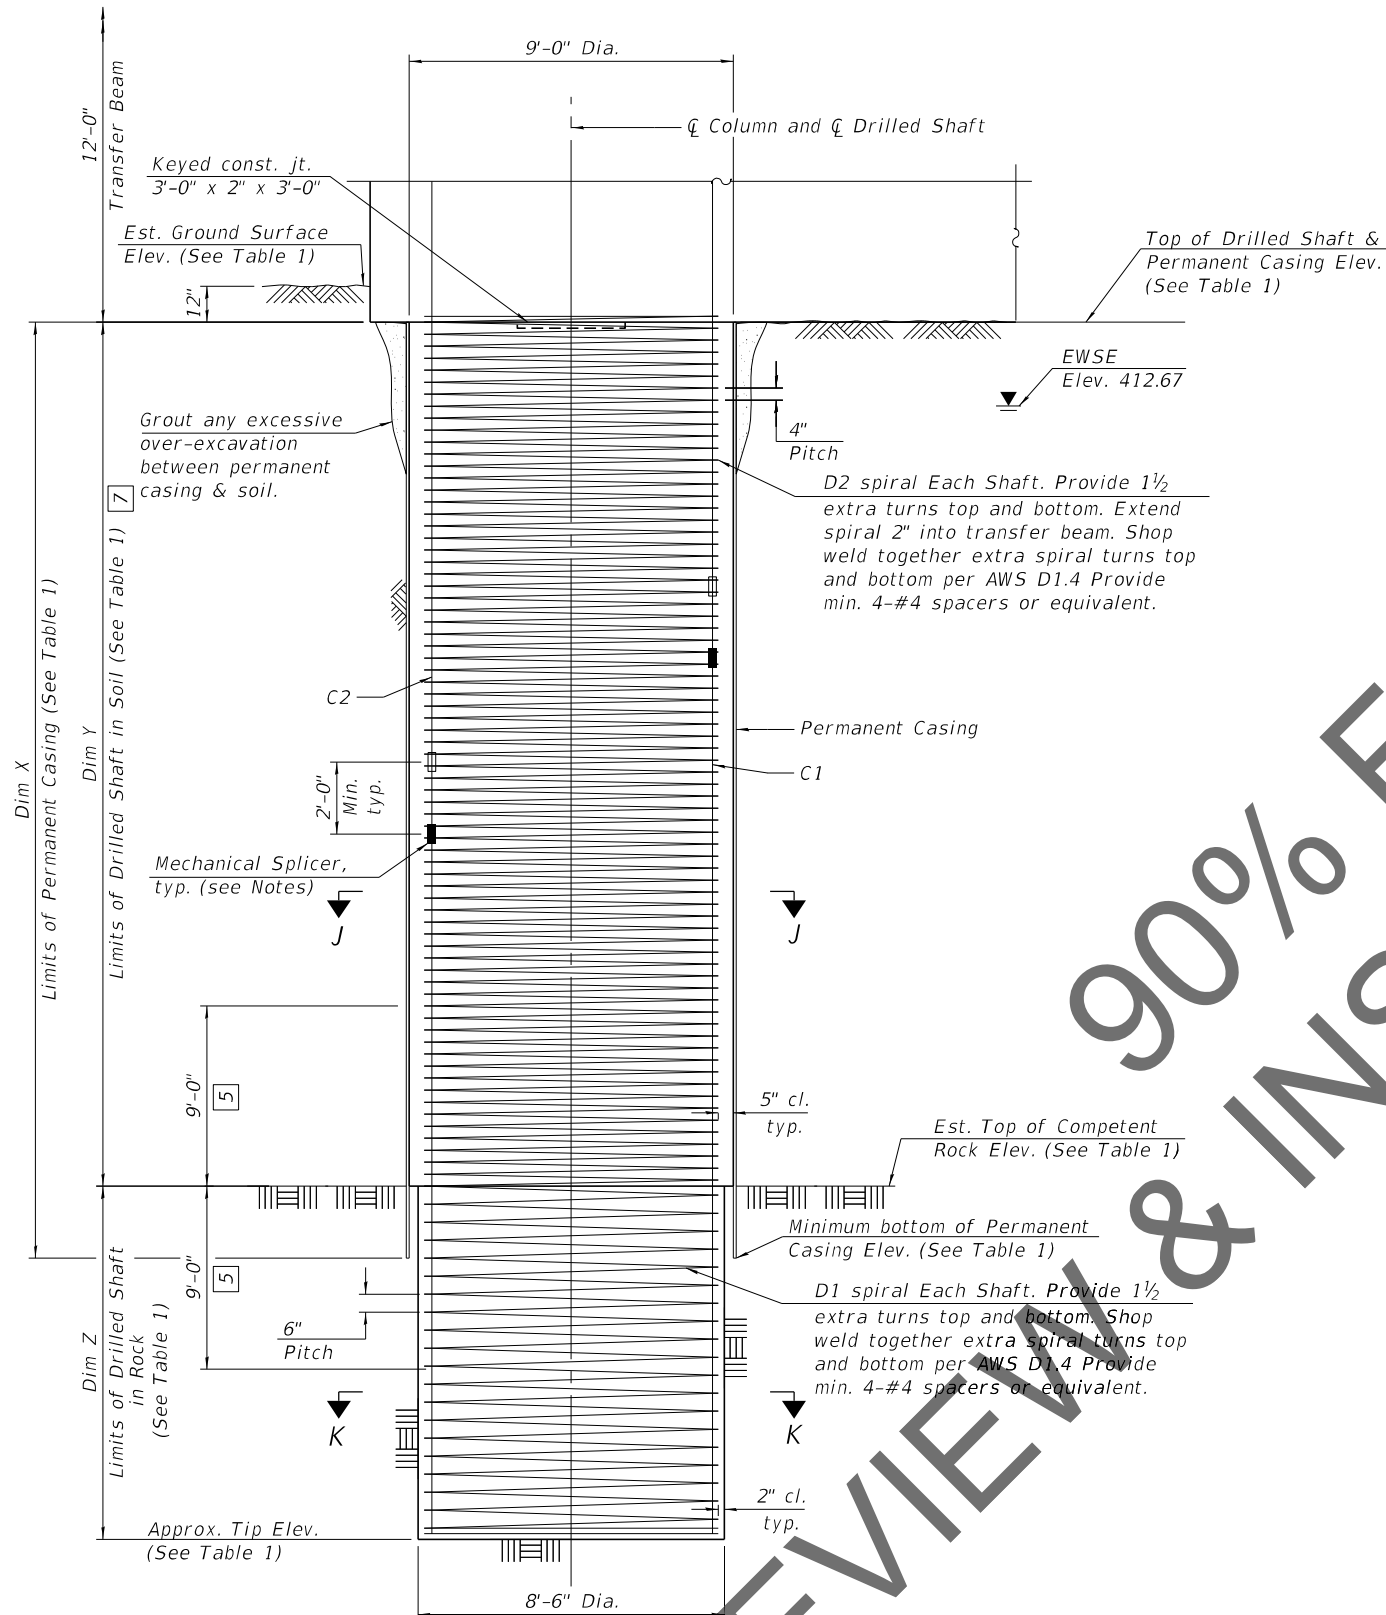


DRILLED SHAFT DETAIL
(One shaft shown, three shafts required,
one under each column)

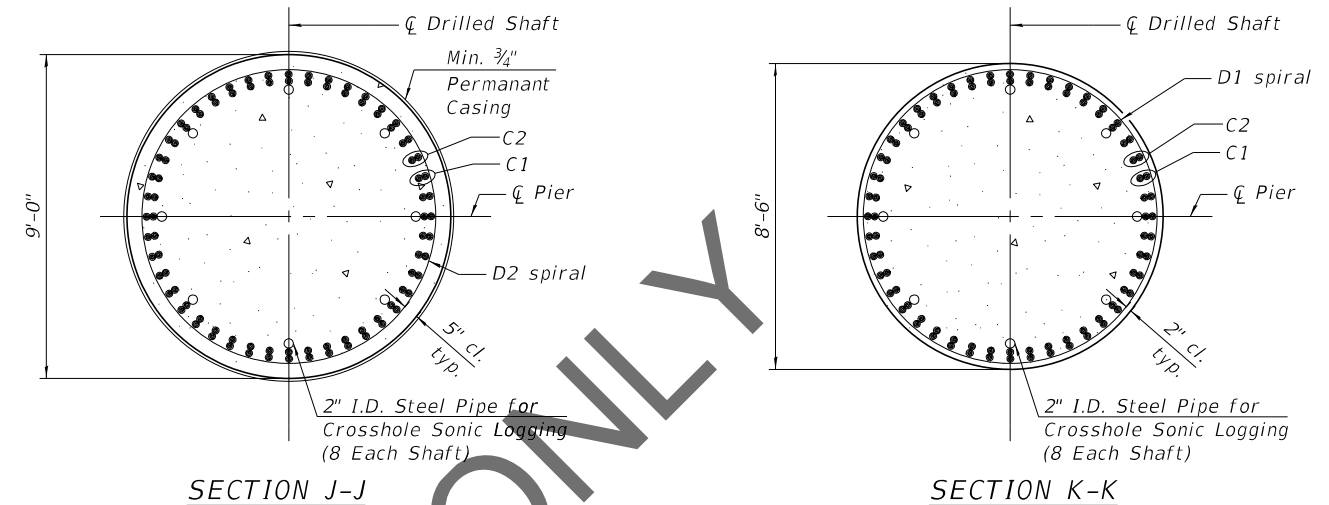

- 5 No splicing of bars allowed in this region.
- 7 If the prevailing water surface elevation during construction is consistently different than estimated on the plans, the contractor may propose an adjustment to the top of the drilled shaft elevation as part of their installation procedure. The top of all drilled shafts within a substructure unit shall be constructed to the same elevation and extend above the prevailing water surface. The quantities and reinforcement detailing are based on the top of shaft and the estimated elevations shown and may change based on the actual elevations encountered at each shaft and the final top of shaft elevation.

Notes:
For Pier Plan and Elevation, see Sheets 223 and 224 of 292.
For additional notes, bar details, and Bill of Materials, see sheets 227 and 228 of 292 .
For Table 1, see sheet 226 of 292.
For Mechanical Splicer Details, see sheet 248 of 292.
The Contractor may propose a construction joint in the drilled shaft so separate pours can be made, if the shaft can be poured in the dry, subject to approval from the Engineer.
The Permanent Casing is shown embedded 2 ft. into rock for estimate of quantities. The Contractor is responsible for determining the casing thickness and the actual tip elevation to be used. See Article 516.06(d) of the Standard Specifications. Pay Limits for the Permanent Casing shall be based on the minimum length shown.
When splicing of spiral reinforcement is necessary, the spirals shall be provided with 1 1/2 extra turns at the ends to be spliced. These additional turns shall either be welded together according to AWS D1.4, or shall both terminate with a 135° standard hook.
Alternate location of mechanical splices of C1 bars every other bar.
Alternate location of mechanical splices of C2 bars within each bundle.

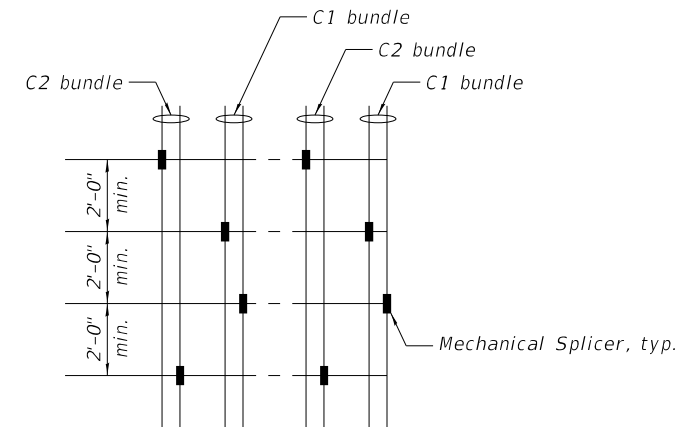

ALTERNATE MECHANICAL SPLICERS LOCATION

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 18 & 23 PLAN AND ELEVATION - 3
STRUCTURE NO. 060-0350 (EB)



SHEET 225 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	425
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -

TABLE 1

		Pier 18	Pier 23
C Pier Station		1817+09.47	1828+89.47
Bearing Seat Elevation	Girder 1	451.74	445.84
	Girder 2	451.96	446.06
	Girder 3	452.15	446.25
	Girder 4	451.95	446.05
	Girder 5	451.76	445.85
	Girder 6	451.56	445.66
Top of Cap Elevation		451.56	445.66
Bottom of Cap Elevation		443.56	437.66
Column Height		16'-6 ⁵ / ₈ "	12'-7 ⁷ / ₈ "
Top of Shaft Elevation		415.00	413.00
Approx. Tip Elevation		317.50	320.00
Est. Ground Surface Elevation		416.00	414.00
Est. Top of Rock Elevation		343.00	333.50
Min. bottom of Permanent Casing Elevation		341.00	331.50
Dim X		74'-0"	81'-6"
Dim Y		72'-0"	79'-6"
Dim Z		25'-6"	13'-6"
S1		2 ⁵ / ₈ "	2 ⁵ / ₈ "
S2		2 ¹ / ₄ "	2 ¹ / ₄ "
S3		2 ³ / ₈ "	2 ³ / ₈ "
S4		2 ¹ / ₄ "	2 ³ / ₈ "
S5		2 ³ / ₈ "	2 ¹ / ₄ "

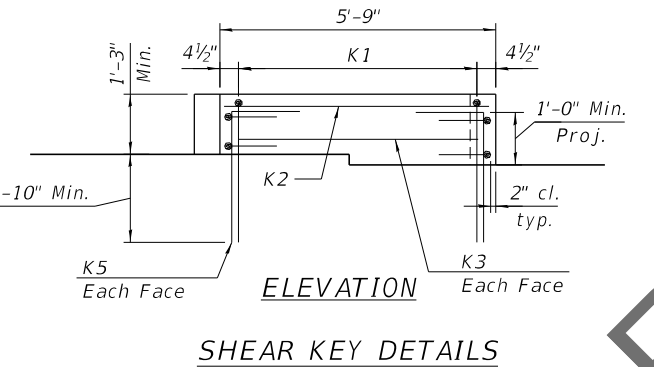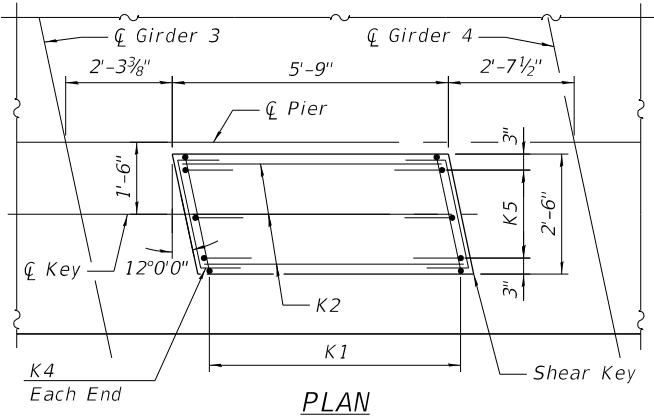

Pier 18


Mark	Bar Callouts	Bar Callouts
(1)	43 sets of 1-#6 s1801(E) and 1-#6 s1805(E) at 5" cts.	43 sets of 1-#6 s2301(E) and 1-#6 s2305(E) at 5" cts.
(2)	11 sets of 2-#6 s1802(E) at 8" cts.	11 sets of 2-#6 s2302(E) at 8" cts.
(3)	6 sets of 4-#6 s1807(E) at 5" cts.	6 sets of 4-#6 s2307(E) at 5" cts.
(4)	47-#6 s1808(E) at abt. 8" cts.	47-#6 s2308(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s1803(E) and 2-#6 s1806(E) at 6" cts.	33 sets of 1-#6 s2303(E) and 2-#6 s2306(E) at 6" cts.
(6)	17 sets of 2-#6 s1804(E) at 6" cts.	17 sets of 2-#6 s2304(E) at 6" cts.
(7)	18 sets of 2-#6 s1804(E) at 6" cts.	18 sets of 2-#6 s2304(E) at 6" cts.
(8)	14-#7 hp1802(E) hoops at 3"	14-#7 hp2302(E) hoops at 3"
(9)	44-#7 hp1802(E) hoops at 3"	44-#7 hp2302(E) hoops at 3"
(10)	33-#7 hp1801(E) hoops at 4"	33-#7 hp2301(E) hoops at 4"
T1	2 layers of 13-#11 p1801(E) or p1802(E) at 7 ³ / ₈ "	2 layers of 13-#11 p2301(E) or p2302(E) at 7 ³ / ₈ "
T2	14 bundles of 1-#11 p1805(E) (top) and 1-#11 p1806(E) (bot) at 12" max	14 bundles of 1-#11 p2305(E) (top) and 1-#11 p2306(E) (bot) at 12" max
B1	2 layers of 13-#11 p1803(E) at 7 ³ / ₈ "	2 layers of 13-#11 p2303(E) at 7 ³ / ₈ "
B2	11-#7 p1804(E) at 7 ³ / ₈ "	11-#7 p2304(E) at 7 ³ / ₈ "
B3	14 bundles of 1-#11 p1805(E) (bot) and 1-#11 p1806(E) (top) at 12" max	14 bundles of 1-#11 p2305(E) (bot) and 1-#11 p2306(E) (top) at 12" max
H1	10-#8 h1801(E) at 7 ¹ / ₂ "	10-#8 h2301(E) at 7 ¹ / ₂ "
H2	18-#9 h1802(E) at 7"	18-#9 h2302(E) at 7"
H3	10-#6 h1803(E) at abt. 9 ³ / ₄ "	10-#6 h2303(E) at abt. 9 ³ / ₄ "
A1	6 sets of 1-#7 u1803(E) & 1-#7 u1104(E) at 10 ¹ / ₂ "	6 sets of 1-#7 u2303(E) & 1-#7 u2304(E) at 10 ¹ / ₂ "
A2	10-#7 u1105(E) at 10 ³ / ₄ "	10-#7 u2305(E) at 10 ³ / ₄ "
U1	11-#8 u1801(E) space with h1801(E) and p1801(E)	11-#8 u2301(E) space with h2301(E) and p2301(E)
U2	20-#9 u1802(E) splice with h1802(E) and space with p1805(E)	20-#9 u2302(E) splice with h2302(E) and space with p2305(E)
C1	22 bundles of 2-#14 v1801(E) and 2-#14 v1802(E) alternate eq. spa.	22 bundles of 2-#14 v2301(E) and 2-#14 v2302(E) alternate eq. spa.
C2	22 bundles of 2-#14 v1803(E) and 2-#14 v1804(E) alternate eq. spa.	22 bundles of 2-#14 v2303(E) and 2-#14 v2304(E) alternate eq. spa.
C3	40-#11 v1805(E) eq. spa.	40-#11 v2305(E) eq. spa.
D1	#7 sp1801(E) at 6" pitch	#7 sp2301(E) at 6" pitch
D2	#7 sp1802(E) at 4" pitch	#7 sp2302(E) at 4" pitch
D3	#7 sp1803(E) at 3" pitch	#7 sp2303(E) at 3" pitch
K1	13-#5 s1809(E) spa. at 5"	13-#5 s2309(E) spa. at 5"
K2	3-#5 h1804(E) space with n1801(E)	3-#5 h2304(E) space with n2301(E)
K3	1-#5 h1804(E) ea. face	1-#5 h2304(E) ea. face
K4	2-#5 h1805(E) ea. face	2-#5 h2305(E) ea. face
K5	3-#5 n1801(E) at 12" ea. face	3-#5 n2301(E) at 12" ea. face
R	#5 s1810(E)	#5 s2310(E)

Pier 23

Notes:
For Pier Plan and Elevation, see sheets 223, 224 and 225 of 292.
For bar details, see sheet 227 of 292.
For Bill of Material, see sheet 228 of 292.


MODEL: Default
FILE NAME: C:\C54PDF\917545087_116\060-0350-D876\90-bya-60aPRT.dgn
9/10/2021 4:43:26 PM

MODEL: Default
FILE NAME: C:\JCS4PDF\917545087_117060-0350-0876\90-byd-61aPRT.dgn
9/10/2021 4:41:50 PM

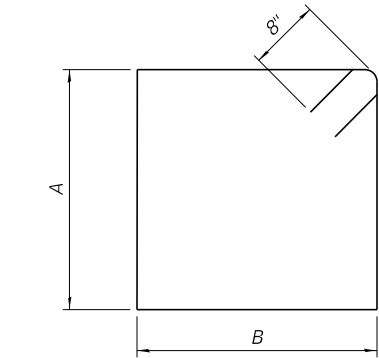


BARS s1801(E) & s1803(E)
BARS s2301(E) & s2303(E)

Bars	A	B
s1801(E) & s2301(E)	7' -8"	7' -8"
s1803(E) & s2303(E)	11' -8"	9' -4"




BARS s1802(E) & s1804(E) & s1807(E)
BARS s2302(E) & s2304(E) & s2307(E)

Bars	A	B
s1802(E) & s2302(E)	7' -8"	5' -10"
s1804(E) & s2304(E)	11' -8"	6' -8"
s1807(E) & s2307(E)	4' -10"	5' -10"




BARS s1805(E) & s1806(E)
BARS s2305(E) & s2306(E)

Bars	A
s1805(E) & s2305(E)	7' -8"
s1806(E) & s2306(E)	11' -8"

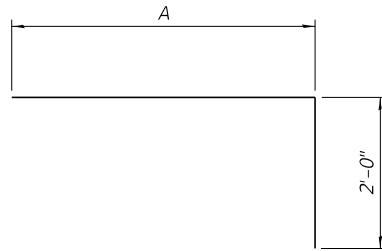


BARS p1801(E) & p1802(E)
BARS p2301(E) & p2302(E)

Bars	A
p1801(E) & p2301(E)	24' -0"
p1802(E) & p2302(E)	49' -5"




BARS p1805(E) & p1806(E)
BARS p2305(E) & p2306(E)

Bars	A
p1805(E) & p2305(E)	54' -2"
p1806(E) & p2306(E)	53' -8"




BARS u1803(E)
BARS u2303(E)

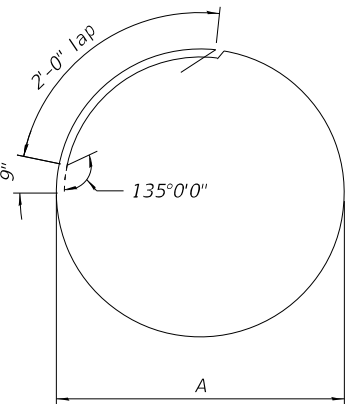


BARS hp1801(E) & hp1802(E)
BARS hp2301(E) & hp2302(E)

Bars	A
hp1801(E) & hp2301(E)	8' -2"
hp1802(E) & hp2302(E)	6' -8"




BARS u1801(E) & u1802(E)
BARS u2301(E) & u2302(E)

Bars	A	B	C	R
u1801(E) & u2301(E)	5' -4"	11' -9"	5' -4"	3' -9"
u1802(E) & u2302(E)	5' -9"	14' -5"	7' -9"	4' -7"




BARS u1805(E) & s1808(E)
BARS u2305(E) & s2308(E)


Bars	A	B
u1805(E) & u2305(E)	4' -7"	11' -6"
s1808(E) & s2308(E)	2' -9"	7' -8"




BARS s1809(E)
BARS s2309(E)




BARS h1805(E)
BARS h2305(E)



BARS n1801(E)
BARS n2301(E)



BARS s1810(E)
BARS s2310(E)



BARS u1804(E)
BARS u2304(E)

Pier 18
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1801(E)	20	#8	56'-2"	—
h1802(E)	36	#9	38'-0"	—
h1803(E)	10	#6	31'-7"	—
h1804(E)	5	#5	5'-5"	—
h1805(E)	4	#5	3'-11"	⌒
hp1801(E)	99	#7	29'-2"	○
hp1802(E)	174	#7	24'-6"	○
n1801(E)	6	#5	3'-10"	┐
p1801(E)	26	#11	26'-0"	┐
p1802(E)	26	#11	51'-5"	┐
p1803(E)	26	#11	57'-9"	—
p1804(E)	22	#7	2'-11"	—
p1805(E)	28	#11	58'-2"	┐
p1806(E)	28	#11	57'-8"	┐
s1801(E)	86	#6	32'-0"	□
s1802(E)	66	#6	19'-4"	□
s1803(E)	66	#6	43'-4"	□
s1804(E)	106	#6	25'-0"	□
s1805(E)	86	#6	9'-4"	┐
s1806(E)	132	#6	13'-4"	┐
s1807(E)	48	#6	16'-6"	□
s1808(E)	47	#6	13'-2"	□
s1809(E)	13	#5	8'-2"	□
s1810(E)	8	#5	5'-5"	▭
*** sp1801(E)	3	#7	24'-6"	〰〰〰
*** sp1802(E)	3	#7	73'-2"	〰〰〰
*** sp1803(E)	3	#7	16'-11"	〰〰〰
u1801(E)	22	#8	22'-5"	⌒
u1802(E)	40	#9	27'-11"	⌒
u1803(E)	12	#7	6'-9"	┐
u1804(E)	12	#7	6'-10"	┐
u1805(E)	20	#7	20'-8"	□
v1801(E)	132	#14	53'-1"	—
v1802(E)	132	#14	55'-8"	—
v1803(E)	132	#14	50'-7"	—
v1804(E)	132	#14	58'-2"	—
v1805(E)	120	#11	35'-6"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	479.3
Reinforcement Bars, Epoxy Coated			Pound	377,120
Permanent Casing			Foot	222
Drilled Shaft in Soil			Cu. Yd.	509
Drilled Shaft in Rock			Cu. Yd.	161
Crosshole Sonic Logging Access Ducts			Foot	293
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	293
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 23
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h2301(E)	20	#8	56'-2"	—
h2302(E)	36	#9	38'-0"	—
h2303(E)	10	#6	31'-7"	—
h2304(E)	5	#5	5'-5"	—
h2305(E)	4	#5	3'-11"	⌒
hp2301(E)	99	#7	29'-2"	○
hp2302(E)	174	#7	24'-6"	○
n2301(E)	6	#5	3'-10"	┐
p2301(E)	26	#11	26'-0"	┐
p2302(E)	26	#11	51'-5"	┐
p2303(E)	26	#11	57'-9"	—
p2304(E)	22	#7	2'-11"	—
p2305(E)	28	#11	58'-2"	┐
p2306(E)	28	#11	57'-8"	┐
s2301(E)	86	#6	32'-0"	□
s2302(E)	66	#6	19'-4"	□
s2303(E)	66	#6	43'-4"	□
s2304(E)	106	#6	25'-0"	□
s2305(E)	86	#6	9'-4"	┐
s2306(E)	132	#6	13'-4"	┐
s2307(E)	48	#6	16'-6"	□
s2308(E)	47	#6	13'-2"	□
s2309(E)	13	#5	8'-2"	□
s2310(E)	8	#5	5'-5"	▭
*** sp2301(E)	3	#7	12'-6"	〰〰〰
*** sp2302(E)	3	#7	80'-8"	〰〰〰
*** sp2303(E)	3	#7	13'-0"	〰〰〰
u2301(E)	22	#8	22'-5"	⌒
u2302(E)	40	#9	27'-11"	⌒
u2303(E)	12	#7	6'-9"	┐
u2304(E)	12	#7	6'-10"	┐
u2305(E)	20	#7	20'-8"	□
v2301(E)	132	#14	50'-10"	—
v2302(E)	132	#14	53'-5"	—
v2303(E)	132	#14	48'-4"	—
v2304(E)	132	#14	55'-11"	—
v2305(E)	120	#11	31'-7"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	462.8
Reinforcement Bars, Epoxy Coated			Pound	363,290
Permanent Casing			Foot	245
Drilled Shaft in Soil			Cu. Yd.	562
Drilled Shaft in Rock			Cu. Yd.	86
Crosshole Sonic Logging Access Ducts			Foot	279
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	279
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Notes:


For Pier Plan and Elevation, see sheets 223 thru 225 of 292.

For additional bar details, see sheets 226 and 227 of 292.


Pier 18 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (11,710kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.

Pier 23 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (5,949 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.

The quantities and reinforcement detailing are based on the estimated top of competent rock and the estimated elevations shown and may change based on the actual elevations encountered at each shaft.

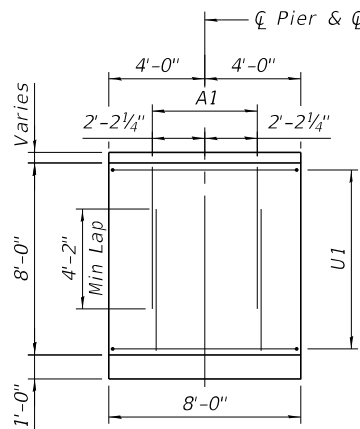


VIEW A-A
(T1 and (3) bars not shown for clarity)

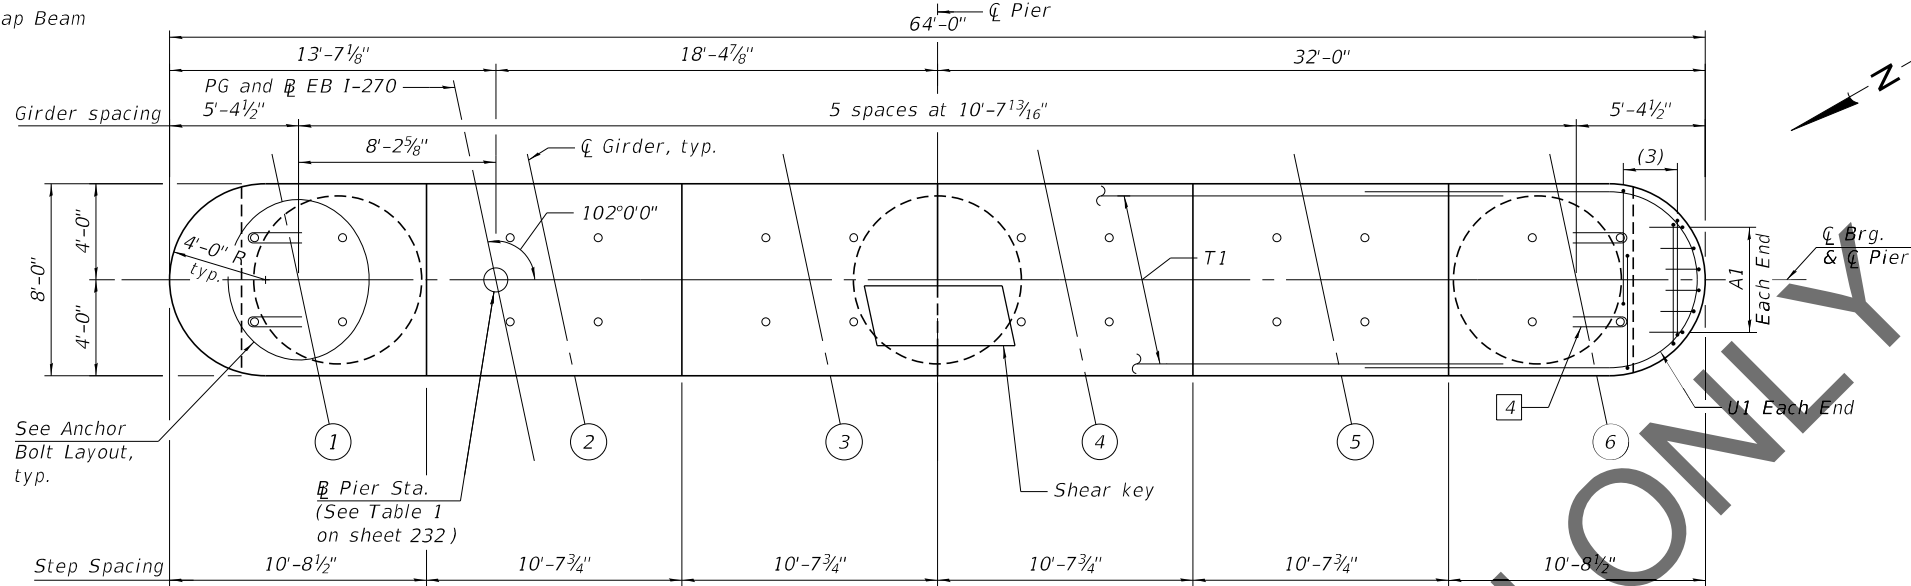


Notes:
Space reinforcement in cap to miss anchor bolts.
Pour steps monolithically with cap.


TOP PLAN

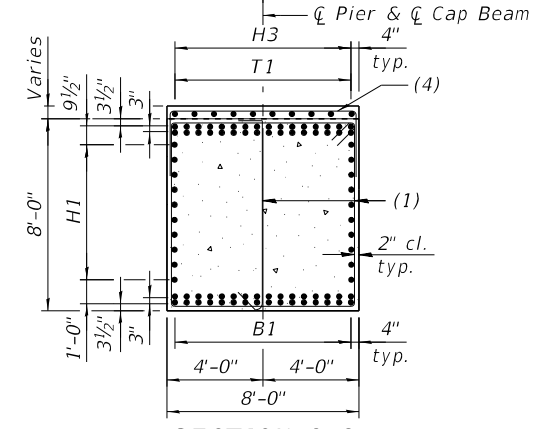

SECTION C-C

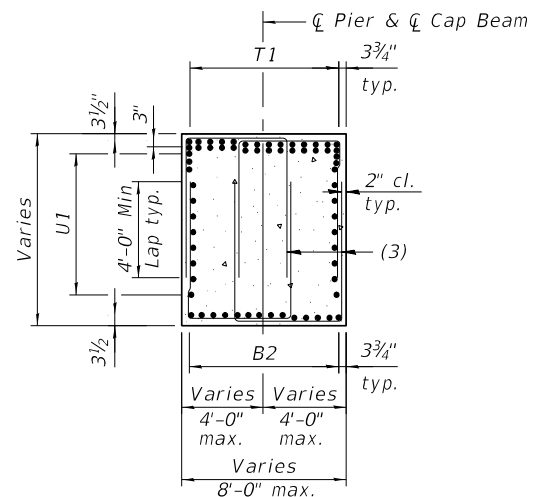


SECTION D-D

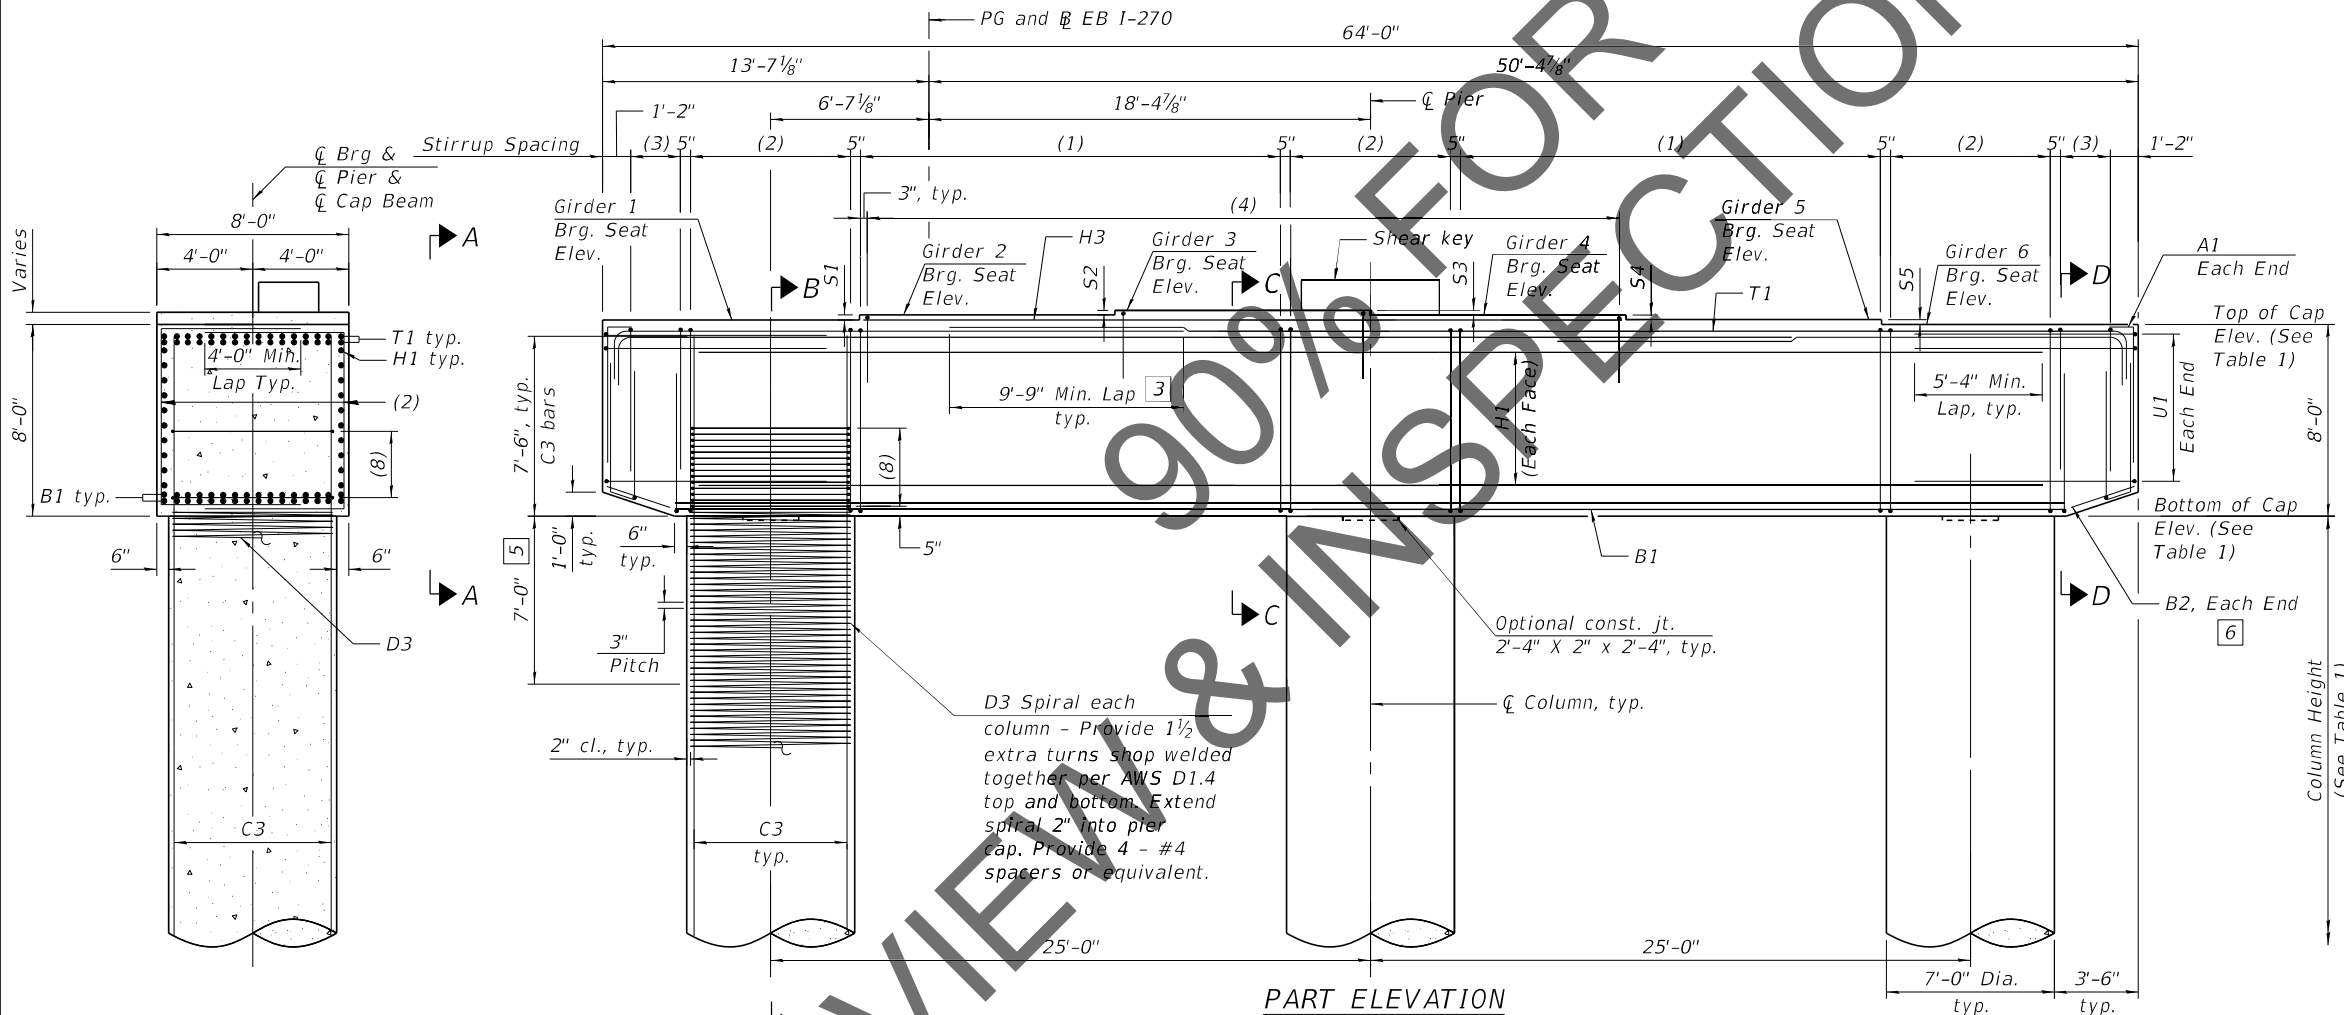

PART ELEVATION
(Looking East)

SECTION B-B

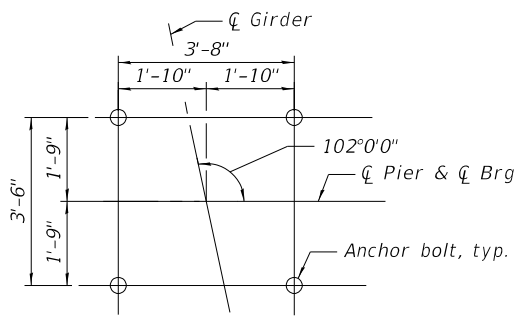

ANCHOR BOLTS LAYOUT

- [3] Alternate placement cap top rebars to stagger the laps
- [4] Provide 2 - R bar at each anchor shown. Place first R bar with top mat reinforcement and second R bar 6" below top U bar
- [5] No splicing of bars allowed in this region.
- [6] Field cut bars when needed to keep 2" clear concrete cover.

Notes:
For bar details and Bill of Materials see sheets 233 and 234 of 292.
For column height, step height and all Elevations, See Table 1 on sheet 232 of 292.
For bearing details, see sheet 160 of 292.
For bar callouts and shear key details, see sheet 232 of 292.

MODEL: Default
FILE NAME: C:\C54PDF\920345087_258\060-0350-0876\90-bza-63aPPE.dgn
9/11/2021 4:49:13 PM

HORNER SHIFRIN
Teaming with:
PARSONS


USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


PIER 19 THRU 22 PLAN AND ELEVATION - 1
STRUCTURE NO. 060-0350 (EB)

SHEET 229 OF 292 SHEETS


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	429
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

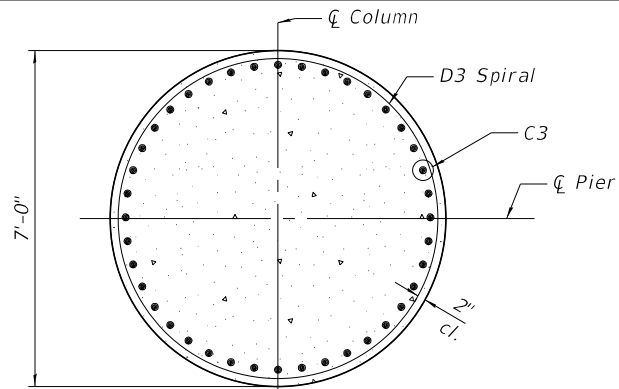


SECTION E-E

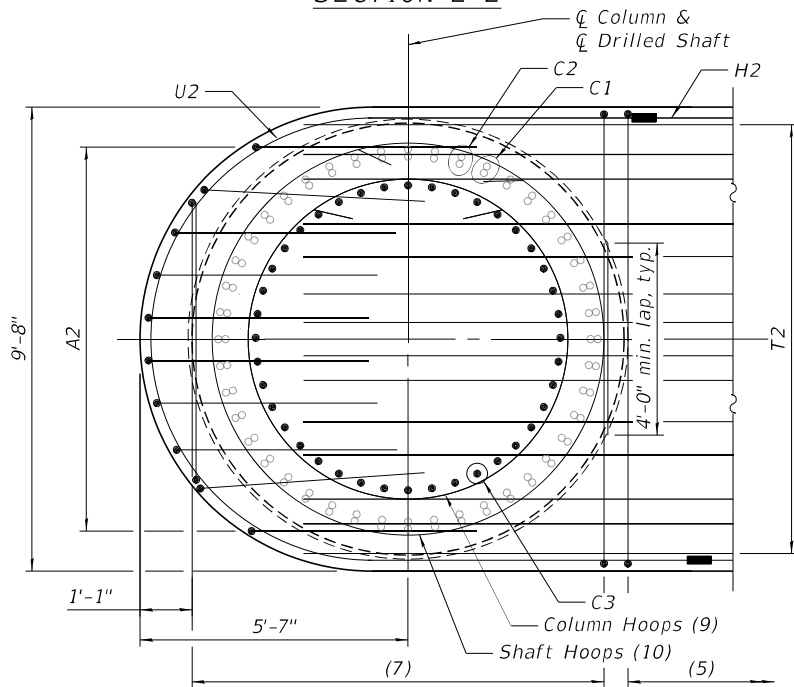


SECTION F-F

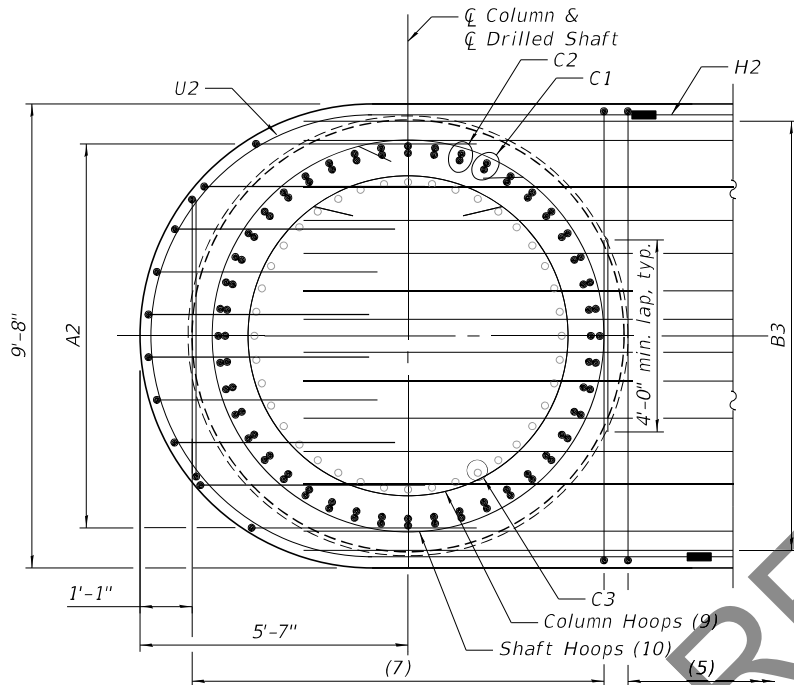


SECTION G-G

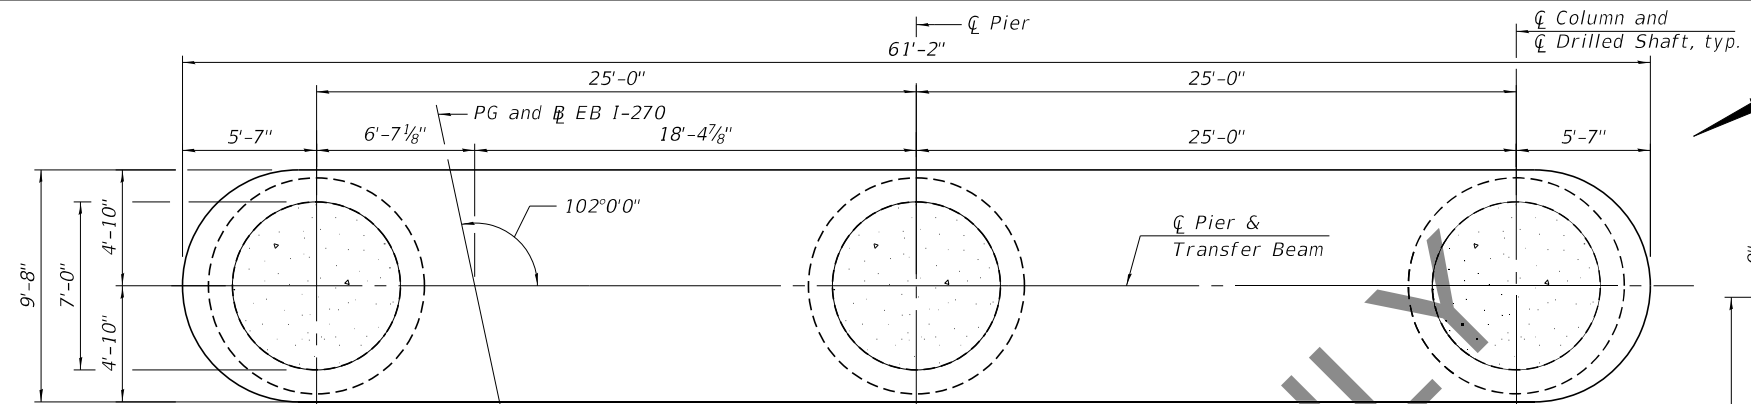

PLAN - TRANSFER BEAM

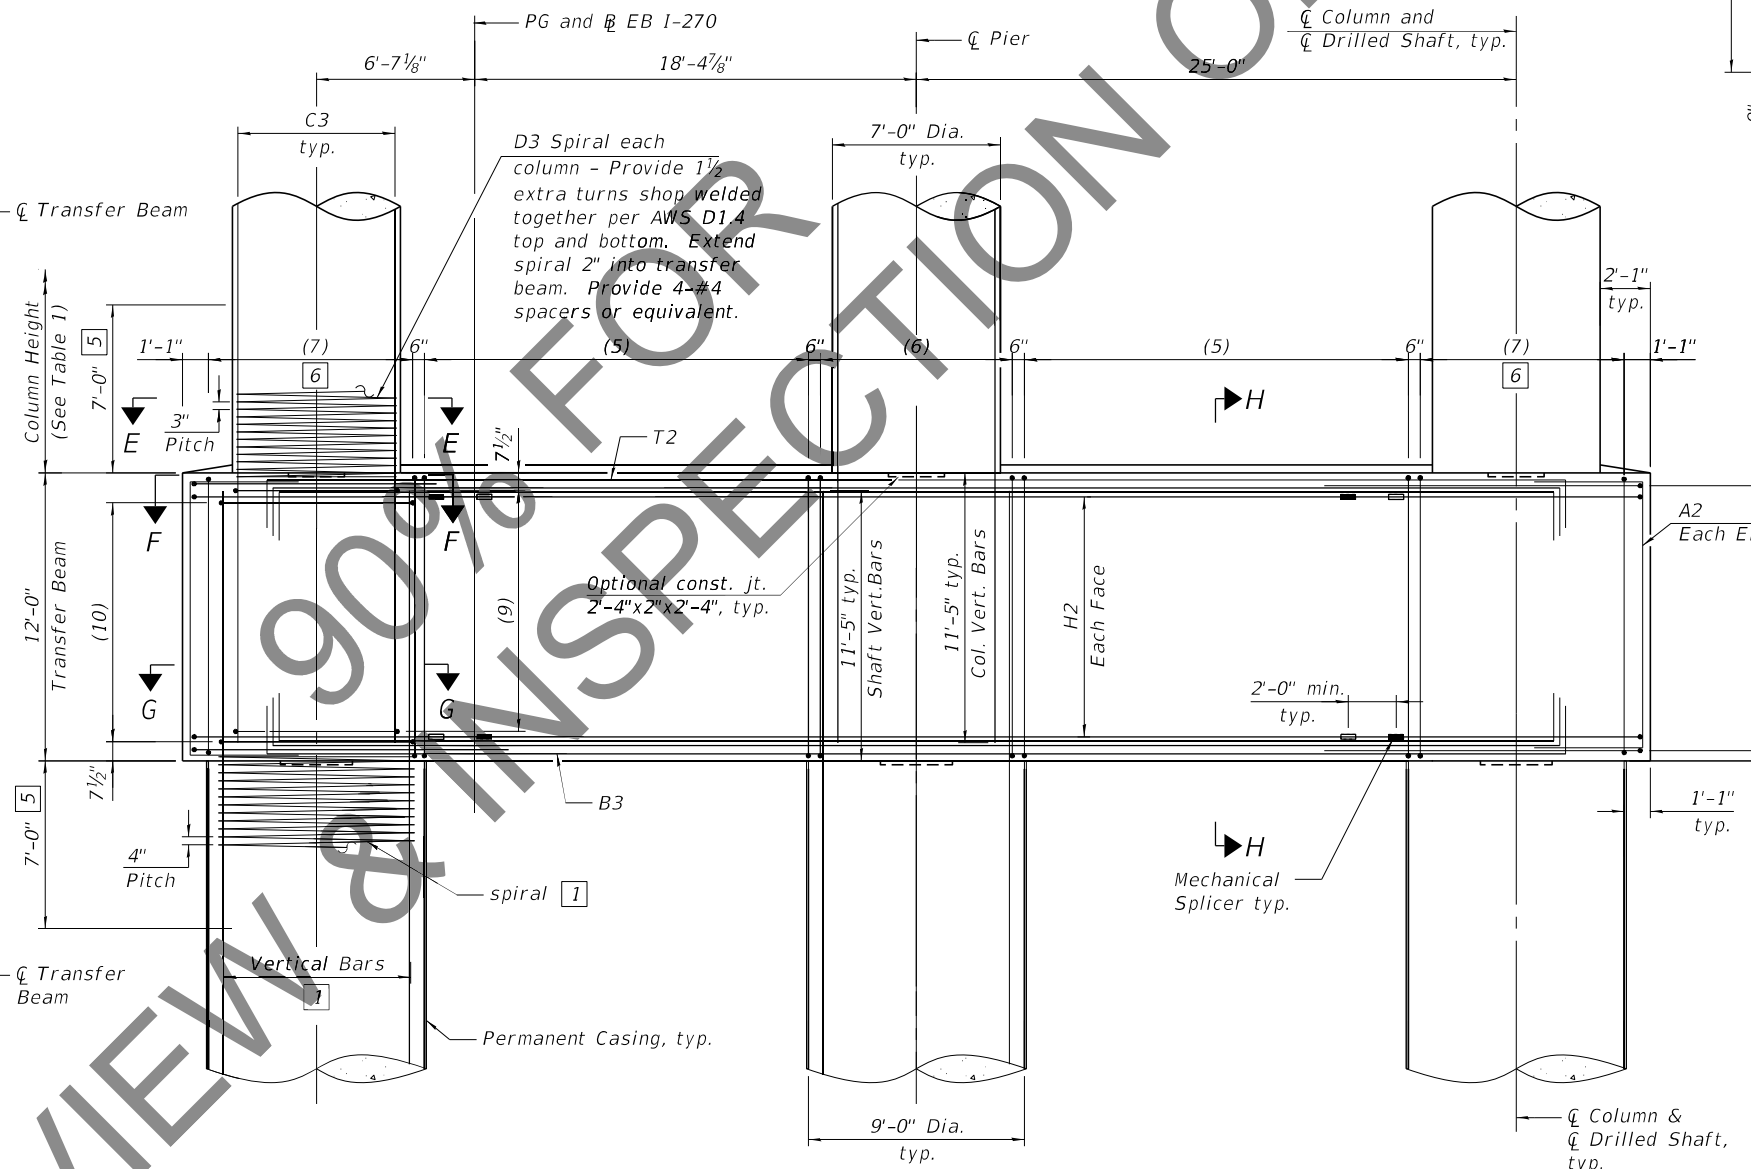

PART ELEVATION - TRANSFER BEAM
(Looking East)

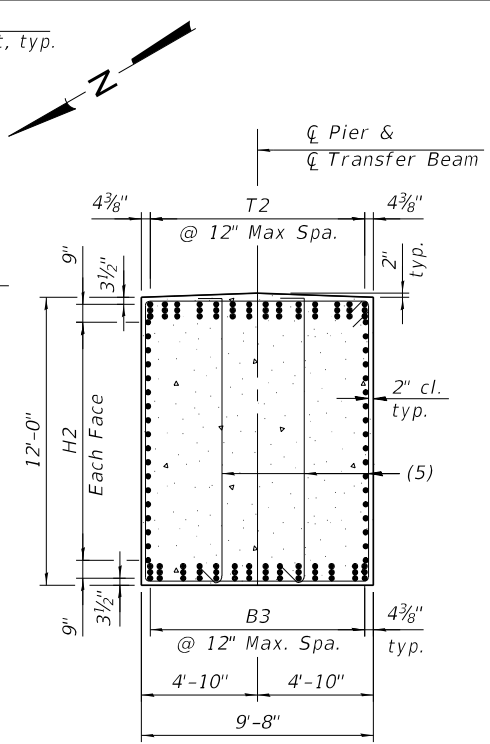

SECTION H-H

- 1 See sheet 231 of 292 for additional rebar placement.
- 2 Adjust transfer beam rebar slightly when conflict with column or shaft vertical bar.
- 5 No splicing of bars allowed in this region.
- 6 Field cut bars when needed to keep 2" clear concrete cover.

Notes:
 For Top Plan and Part Elevation, see sheet 229 of 292.
 For Drilled Shaft Details, see sheet 231 of 292.
 For additional notes, bar details, and Bill of Material, see sheets 232, 233 and 234 of 292.
 For Table 1, see sheet 232 of 292.
 For Mechanical Splicer details, see sheet 248 of 292.

TABLE 1

		Pier 19	Pier 20	Pier 21	Pier 22
☒ Pier Station		1819+45.47	1821+81.47	1824+17.47	1826+53.47
Bearing Seat Elevation	Girder 1	450.63	449.45	448.27	447.09
	Girder 2	450.85	449.67	448.49	447.31
	Girder 3	451.04	449.86	448.68	447.50
	Girder 4	450.84	449.66	448.48	447.30
	Girder 5	450.65	449.46	448.28	447.10
	Girder 6	450.45	449.27	448.09	446.91
Top of Cap Elevation		450.45	449.27	448.09	446.91
Bottom of Cap Elevation		442.45	441.27	440.09	438.91
Column Height		15'-5 $\frac{3}{8}$ "	15'-9 $\frac{1}{8}$ "	13'-10 $\frac{5}{8}$ "	14'-2 $\frac{1}{2}$ "
Top of Shaft Elevation		415.00	413.50	414.20	412.70
Approx. Tip Elevation		326.00	325.50	323.70	323.20
Est. Ground Surface Elevation		416.00	414.50	415.20	413.70
Est. Top of Rock Elevation		339.50	339.00	337.20	336.70
Min. bottom of Permanent Casing Elevation		337.50	337.00	335.20	334.70
Dim X		77'-6"	76'-6"	79'-0"	78'-0"
Dim Y		75'-6"	74'-6"	77'-0"	76'-0"
Dim Z		13'-6"	13'-6"	13'-6"	13'-6"
S1		2 $\frac{5}{8}$ "	2 $\frac{5}{8}$ "	2 $\frac{5}{8}$ "	2 $\frac{5}{8}$ "
S2		2 $\frac{1}{4}$ "	2 $\frac{1}{4}$ "	2 $\frac{1}{4}$ "	2 $\frac{1}{4}$ "
S3		2 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "
S4		2 $\frac{1}{4}$ "	2 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "
S5		2 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	2 $\frac{1}{4}$ "	2 $\frac{1}{4}$ "


Pier 19

Pier 20

Pier 21

Pier 22

Mark	Bar Callouts	Bar Callouts	Bar Callouts	Bar Callouts
(1)	43 sets of 1-#6 s1901(E) and 1-#6 s1905(E) at 5" cts.	43 sets of 1-#6 s2001(E) and 1-#6 s2005(E) at 5" cts.	43 sets of 1-#6 s2101(E) and 1-#6 s2105(E) at 5" cts.	43 sets of 1-#6 s2201(E) and 1-#6 s2205(E) at 5" cts.
(2)	11 sets of 2-#6 s1902(E) at 8" cts.	11 sets of 2-#6 s2002(E) at 8" cts.	11 sets of 2-#6 s2102(E) at 8" cts.	11 sets of 2-#6 s2202(E) at 8" cts.
(3)	6 sets of 4-#6 s1907(E) at 5" cts.	6 sets of 4-#6 s2007(E) at 5" cts.	6 sets of 4-#6 s2107(E) at 5" cts.	6 sets of 4-#6 s2207(E) at 5" cts.
(4)	47-#6 s1908(E) at abt. 8" cts.	47-#6 s2008(E) at abt. 8" cts.	47-#6 s2108(E) at abt. 8" cts.	47-#6 s2208(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s1903(E) and 2-#6 s1906(E) at 6" cts.	33 sets of 1-#6 s2003(E) and 2-#6 s2006(E) at 6" cts.	33 sets of 1-#6 s2103(E) and 2-#6 s2106(E) at 6" cts.	33 sets of 1-#6 s2203(E) and 2-#6 s2206(E) at 6" cts.
(6)	17 sets of 2-#6 s1904(E) at 6" cts	17 sets of 2-#6 s2004(E) at 6" cts	17 sets of 2-#6 s2104(E) at 6" cts	17 sets of 2-#6 s2204(E) at 6" cts
(7)	18 sets of 2-#6 s1904(E) at 6" cts.	18 sets of 2-#6 s2004(E) at 6" cts.	18 sets of 2-#6 s2104(E) at 6" cts.	18 sets of 2-#6 s2204(E) at 6" cts.
(8)	14-#7 hp1902(E) hoops at 3"	14-#7 hp2002(E) hoops at 3"	14-#7 hp2102(E) hoops at 3"	14-#7 hp2202(E) hoops at 3"
(9)	44-#7 hp1902(E) hoops at 3"	44-#7 hp2002(E) hoops at 3"	44-#7 hp2102(E) hoops at 3"	44-#7 hp2202(E) hoops at 3"
(10)	33-#7 hp1901(E) hoops at 4"	33-#7 hp2001(E) hoops at 4"	33-#7 hp2101(E) hoops at 4"	33-#7 hp2201(E) hoops at 4"
T1	2 layers of 16-#11 p1901(E) or p1902(E) at abt. 5 ⁷ / ₈ "	2 layers of 16-#11 p2001(E) or p2002(E) at abt. 5 ⁷ / ₈ "	2 layers of 16-#11 p2101(E) or p2102(E) at abt. 5 ⁷ / ₈ "	2 layers of 16-#11 p2201(E) or p2202(E) at abt. 5 ⁷ / ₈ "
T2	14 bundles of 1-#11 p1905(E) (top), 1-#11 p1906(E) (mid) and 1-#11 p1907(E) (bot) at 12" max	14 bundles of 1-#11 p2005(E) (top), 1-#11 p2006(E) (mid) and 1-#11 p2007(E) (bot) at 12" max	14 bundles of 1-#11 p2105(E) (top), 1-#11 p2106(E) (mid) and 1-#11 p2107(E) (bot) at 12" max	14 bundles of 1-#11 p2205(E) (top), 1-#11 p2206(E) (mid) and 1-#11 p2207(E) (bot) at 12" max
B1	2 layers of 16-#11 p1903(E) at abt. 5 ⁷ / ₈ "	2 layers of 16-#11 p2003(E) at abt. 5 ⁷ / ₈ "	2 layers of 16-#11 p2103(E) at abt. 5 ⁷ / ₈ "	2 layers of 16-#11 p2203(E) at abt. 5 ⁷ / ₈ "
B2	14-#7 p1904(E) at abt. 5 ⁷ / ₈ "	14-#7 p2004(E) at abt. 5 ⁷ / ₈ "	14-#7 p2104(E) at abt. 5 ⁷ / ₈ "	14-#7 p2204(E) at abt. 5 ⁷ / ₈ "
B3	14 bundles of 1-#11 p1905(E) (bot), 1-#11 p1906(E) (mid) and 1-#11 p1907(E) (top) at 12" max	14 bundles of 1-#11 p2005(E) (bot), 1-#11 p2006(E) (mid) and 1-#11 p2007(E) (top) at 12" max	14 bundles of 1-#11 p2105(E) (bot), 1-#11 p2106(E) (mid) and 1-#11 p2107(E) (top) at 12" max	14 bundles of 1-#11 p2205(E) (bot), 1-#11 p2206(E) (mid) and 1-#11 p2207(E) (top) at 12" max
H1	10-#8 h1901(E) at 7 ¹ / ₂ "	10-#8 h2001(E) at 7 ¹ / ₂ "	10-#8 h2101(E) at 7 ¹ / ₂ "	10-#8 h2201(E) at 7 ¹ / ₂ "
H2	18-#9 h1902(E) at 7"	18-#9 h2002(E) at 7"	18-#9 h2102(E) at 7"	18-#9 h2202(E) at 7"
H3	10-#6 h1903(E) at abt. 9 ³ / ₄ "	10-#6 h2003(E) at abt. 9 ³ / ₄ "	10-#6 h2103(E) at abt. 9 ³ / ₄ "	10-#6 h2203(E) at abt. 9 ³ / ₄ "
A1	6 sets of 1-#7 u1903(E) & 1-#7 u1904(E) at 10 ¹ / ₂ "	6 sets of 1-#7 u2003(E) & 1-#7 u2004(E) at 10 ¹ / ₂ "	6 sets of 1-#7 u2103(E) & 1-#7 u2104(E) at 10 ¹ / ₂ "	6 sets of 1-#7 u2203(E) & 1-#7 u2204(E) at 10 ¹ / ₂ "
A2	10-#7 u1905(E) at 10 ³ / ₄ "	10-#7 u2005(E) at 10 ³ / ₄ "	10-#7 u2105(E) at 10 ³ / ₄ "	10-#7 u2205(E) at 10 ³ / ₄ "
U1	11-#8 u1901(E) space with h1901(E) and p1901(E)	11-#8 u2001(E) space with h2001(E) and p2001(E)	11-#8 u2101(E) space with h2101(E) and p2101(E)	11-#8 u2201(E) space with h2201(E) and p2201(E)
U2	20-#9 u1902(E) splice with h1902(E) and space with p1905(E)	20-#9 u2002(E) splice with h2002(E) and space with p2005(E)	20-#9 u2102(E) splice with h2102(E) and space with p2105(E)	20-#9 u2202(E) splice with h2202(E) and space with p2205(E)
C1	22 bundles of 2-#14 v1901(E) and 2-#14 v1902(E) alternate eq. spa.	22 bundles of 2-#14 v2001(E) and 2-#14 v2002(E) alternate eq. spa.	22 bundles of 2-#14 v2101(E) and 2-#14 v2102(E) alternate eq. spa.	22 bundles of 2-#14 v2201(E) and 2-#14 v2202(E) alternate eq. spa.
C2	22 bundles of 2-#14 v1903(E) and 2-#14 v1904(E) alternate eq. spa.	22 bundles of 2-#14 v2003(E) and 2-#14 v2004(E) alternate eq. spa.	22 bundles of 2-#14 v2103(E) and 2-#14 v2104(E) alternate eq. spa.	22 bundles of 2-#14 v2203(E) and 2-#14 v2204(E) alternate eq. spa.
C3	40-#11 v1905(E) eq. spa.	40-#11 v2005(E) eq. spa.	40-#11 v2105(E) eq. spa.	40-#11 v2205(E) eq. spa.
D1	#7 sp1901(E) at 6" pitch	#7 sp2001(E) at 6" pitch	#7 sp2101(E) at 6" pitch	#7 sp2201(E) at 6" pitch
D2	#7 sp1902(E) at 4" pitch	#7 sp2002(E) at 4" pitch	#7 sp2102(E) at 4" pitch	#7 sp2202(E) at 4" pitch
D3	#7 sp1903(E) at 3" pitch	#7 sp2003(E) at 3" pitch	#7 sp2103(E) at 3" pitch	#7 sp22

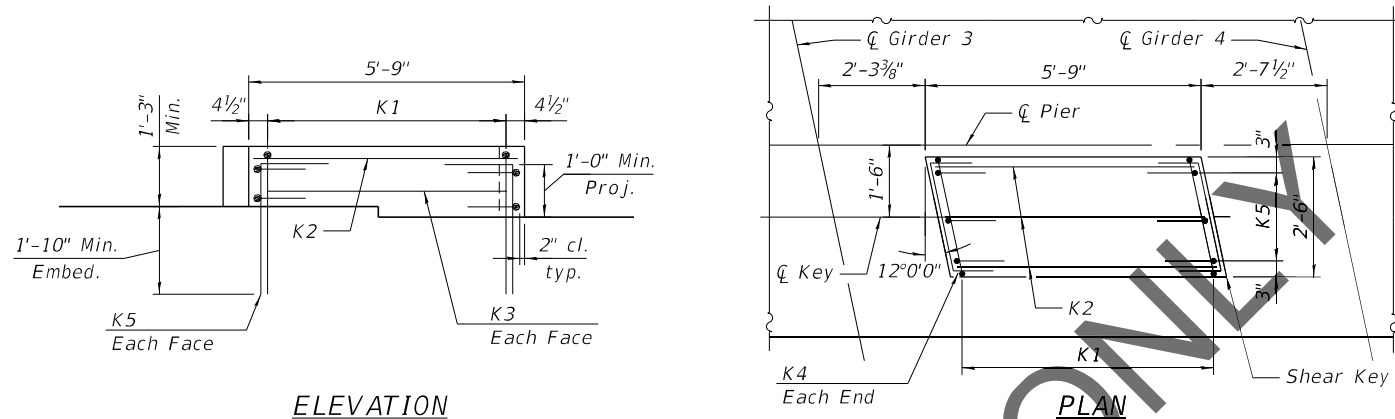


Notes:
For Pier Plan and Elevation, see sheets 229, 230 and 231 of 292.
For bar details, see sheet 233 of 292.
For Bill of Material, see sheet 234 of 292.

MODEL: Default
FILE NAME: C:\C54PDF\917545087_120\060-0350-D876\90-bza-67aPRT.dgn
9/10/2021 4:43:31 PM


USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	433
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		




BARS s1901(E) & s1903(E)
BARS s2001(E) & s2003(E)
BARS s2101(E) & s2103(E)
BARS s2201(E) & s2203(E)

Bars	A	B
s1901(E) thru s2201(E)	7' -8"	7' -8"
s1903(E) thru s2203(E)	11' -8"	9' -4"




BARS s1902(E) & s1904(E) & s1907(E)
BARS s2002(E) & s2004(E) & s2007(E)
BARS s2102(E) & s2104(E) & s2107(E)
BARS s2202(E) & s2204(E) & s2207(E)

Bars	A	B
s1902(E) thru s2202(E)	7' -8"	5' -10"
s1904(E) thru s2204(E)	11' -8"	6' -8"
s1907(E) thru s2207(E)	4' -10"	5' -10"




BARS s1905(E) & s1906(E)
BARS s2005(E) & s2006(E)
BARS s2105(E) & s2106(E)
BARS s2205(E) & s2206(E)

Bars	A
s1905(E) thru s2205(E)	7' -8"
s1906(E) thru s2206(E)	11' -8"

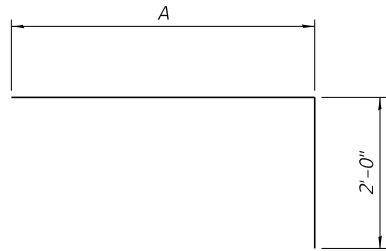


BARS p1901(E) & p1902(E)
BARS p2001(E) & p2002(E)
BARS p2101(E) & p2102(E)
BARS p2201(E) & p2202(E)

Bars	A
p1901(E) thru p2201(E)	24' -0"
p1902(E) thru p2202(E)	49' -5"




BARS p1905(E) & p1906(E) & p1907(E)
BARS p2005(E) & p2006(E) & p2007(E)
BARS p2105(E) & p2106(E) & p2107(E)
BARS p2205(E) & p2206(E) & p2207(E)

Bars	A
p1905(E) thru p2205(E)	54' -2"
p1906(E) thru p2206(E)	53' -8"
p1907(E) thru p2207(E)	53' -2"




BARS u1903(E)
BARS u2003(E)
BARS u2103(E)
BARS u2203(E)

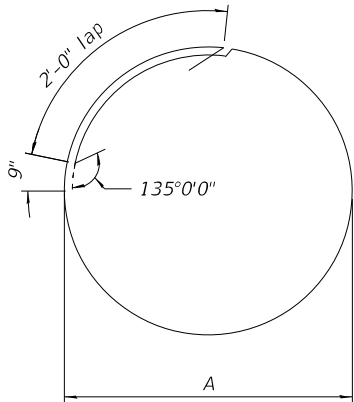


BARS hp1901(E) & hp1902(E)
BARS hp2001(E) & hp2002(E)
BARS hp2101(E) & hp2102(E)
BARS hp2201(E) & hp2202(E)

Bars	A
hp1901(E) thru hp2201(E)	8' -2"
hp1902(E) thru hp2202(E)	6' -8"




BARS u1901(E) & u1902(E)
BARS u2001(E) & u2002(E)
BARS u2101(E) & u2102(E)
BARS u2201(E) & u2202(E)

Bars	A	B	C	R
u1901(E) thru u2201(E)	5' -4"	11' -9"	5' -4"	3' -9"
u1902(E) thru u2202(E)	5' -9"	14' -5"	7' -9"	4' -7"




BARS u1905(E) & s1908(E)
BARS u2005(E) & s2008(E)
BARS u2105(E) & s2108(E)
BARS u2205(E) & s2208(E)


Bars	A	B
u1905(E) thru u2205(E)	4' -7"	11' -6"
s1908(E) thru s2208(E)	2' -9"	7' -8"




BARS s1909(E)
BARS s2009(E)
BARS s2109(E)
BARS s2209(E)

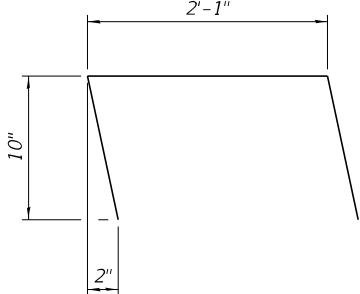


BARS h1905(E)
BARS h2005(E)
BARS h2105(E)
BARS h2205(E)



BARS n1901(E)
BARS n2001(E)
BARS n2101(E)
BARS n2201(E)



BARS s1910(E)
BARS s2010(E)
BARS s2110(E)
BARS s2210(E)



BARS u1904(E)
BARS u2004(E)
BARS u2104(E)
BARS u2204(E)

MODEL: Default
FILE NAME: C:\C54PDF\917545087_121060-0350-D876\90-bza-68aPBIM.dgn
9/10/2021 4:42:38 PM

HORNER & SHIFRIN Teaming with: PARSONS	USER NAME =	DESIGNED - TMB	REVISED -
		CHECKED - GX/EJA	REVISED -
	PLOT SCALE =	DRAWN - TMB	REVISED -
	PLOT DATE =	CHECKED - GX	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 19 THRU 22 BILL OF MATERIALS STRUCTURE NO. 060-0350 (EB)				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
				270	60B-1	MADISON	860	434
SHEET 234 OF 292 SHEETS				ILLINOIS FED. AID PROJECT				

Pier 19
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h1901(E)	20	#8	56'-2"	—
h1902(E)	36	#9	38'-0"	—
h1903(E)	10	#6	31'-7"	—
h1904(E)	5	#5	5'-5"	—
h1905(E)	4	#5	3'-11"	⌒
hp1901(E)	99	#7	29'-2"	○
hp1902(E)	174	#7	24'-6"	○
n1901(E)	6	#5	3'-10"	┐
p1901(E)	32	#11	26'-0"	┐
p1902(E)	32	#11	51'-5"	┐
p1903(E)	32	#11	57'-9"	—
p1904(E)	28	#7	2'-11"	—
p1905(E)	28	#11	58'-2"	┐
p1906(E)	28	#11	57'-8"	┐
p1907(E)	28	#11	57'-2"	┐
s1901(E)	86	#6	32'-0"	□
s1902(E)	66	#6	19'-4"	□
s1903(E)	66	#6	43'-4"	□
s1904(E)	106	#6	25'-0"	□
s1905(E)	86	#6	9'-4"	┐
s1906(E)	132	#6	13'-4"	┐
s1907(E)	48	#6	16'-6"	□
s1908(E)	47	#6	13'-2"	□
s1909(E)	13	#5	8'-2"	□
s1910(E)	8	#5	5'-5"	┐
*** sp1901(E)	3	#7	12'-6"	〰〰〰
*** sp1902(E)	3	#7	76'-8"	〰〰〰
*** sp1903(E)	3	#7	15'-10"	〰〰〰
u1901(E)	22	#8	22'-5"	⊏
u1902(E)	40	#9	27'-11"	⊏
u1903(E)	12	#7	6'-9"	┐
u1904(E)	12	#7	6'-10"	┐
u1905(E)	20	#7	20'-8"	┐
v1901(E)	132	#14	48'-10"	—
v1902(E)	132	#14	51'-5"	—
v1903(E)	132	#14	46'-4"	—
v1904(E)	132	#14	53'-11"	—
v1905(E)	120	#11	34'-5"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	474.7
Reinforcement Bars, Epoxy Coated			Pound	369,430
Permanent Casing			Foot	233
Drilled Shaft in Soil			Cu. Yd.	534
Drilled Shaft in Rock			Cu. Yd.	86
Crosshole Sonic Logging Access Ducts			Foot	267
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	267
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 20
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h2001(E)	20	#8	56'-2"	—
h2002(E)	36	#9	38'-0"	—
h2003(E)	10	#6	31'-7"	—
h2004(E)	5	#5	5'-5"	—
h2005(E)	4	#5	3'-11"	⌒
hp2001(E)	99	#7	29'-2"	○
hp2002(E)	174	#7	24'-6"	○
n2001(E)	6	#5	3'-10"	┐
p2001(E)	32	#11	26'-0"	┐
p2002(E)	32	#11	51'-5"	┐
p2003(E)	32	#11	57'-9"	—
p2004(E)	28	#7	2'-11"	—
p2005(E)	28	#11	58'-2"	┐
p2006(E)	28	#11	57'-8"	┐
p2007(E)	28	#11	57'-2"	┐
s2001(E)	86	#6	32'-0"	□
s2002(E)	66	#6	19'-4"	□
s2003(E)	66	#6	43'-4"	□
s2004(E)	106	#6	25'-0"	□
s2005(E)	86	#6	9'-4"	┐
s2006(E)	132	#6	13'-4"	┐
s2007(E)	48	#6	16'-6"	□
s2008(E)	47	#6	13'-2"	□
s2009(E)	13	#5	8'-2"	□
s2010(E)	8	#5	5'-5"	┐
*** sp2001(E)	3	#7	12'-6"	〰〰〰
*** sp2002(E)	3	#7	75'-8"	〰〰〰
*** sp2003(E)	3	#7	16'-2"	〰〰〰
u2001(E)	22	#8	22'-5"	⊏
u2002(E)	40	#9	27'-11"	⊏
u2003(E)	12	#7	6'-9"	┐
u2004(E)	12	#7	6'-10"	┐
u2005(E)	20	#7	20'-8"	┐
v2001(E)	132	#14	48'-4"	—
v2002(E)	132	#14	50'-11"	—
v2003(E)	132	#14	45'-10"	—
v2004(E)	132	#14	53'-5"	—
v2005(E)	120	#11	34'-9"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	476.0
Reinforcement Bars, Epoxy Coated			Pound	367,330
Permanent Casing			Foot	230
Drilled Shaft in Soil			Cu. Yd.	527
Drilled Shaft in Rock			Cu. Yd.	86
Crosshole Sonic Logging Access Ducts			Foot	264
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	264
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Pier 21
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h2101(E)	20	#8	56'-2"	—
h2102(E)	36	#9	38'-0"	—
h2103(E)	10	#6	31'-7"	—
h2104(E)	5	#5	5'-5"	—
h2105(E)	4	#5	3'-11"	⌒
hp2101(E)	99	#7	29'-2"	○
hp2102(E)	174	#7	24'-6"	○
n2101(E)	6	#5	3'-10"	┐
p2101(E)	32	#11	26'-0"	┐
p2102(E)	32	#11	51'-5"	┐
p2103(E)	32	#11	57'-9"	—
p2104(E)	28	#7	2'-11"	—
p2105(E)	28	#11	58'-2"	┐
p2106(E)	28	#11	57'-8"	┐
p2107(E)	28	#11	57'-2"	┐
s2101(E)	86	#6	32'-0"	□
s2102(E)	66	#6	19'-4"	□
s2103(E)	66	#6	43'-4"	□
s2104(E)	106	#6	25'-0"	□
s2105(E)	86	#6	9'-4"	┐
s2106(E)	132	#6	13'-4"	┐
s2107(E)	48	#6	16'-6"	□
s2108(E)	47	#6	13'-2"	□
s2109(E)	13	#5	8'-2"	□
s2110(E)	8	#5	5'-5"	┐
*** sp2101(E)	3	#7	12'-6"	〰〰〰
*** sp2102(E)	3	#7	78'-2"	〰〰〰
*** sp2103(E)	3	#7	14'-3"	〰〰〰
u2101(E)	22	#8	22'-5"	⊏
u2102(E)	40	#9	27'-11"	⊏
u2103(E)	12	#7	6'-9"	┐
u2104(E)	12	#7	6'-10"	┐
u2105(E)	20	#7	20'-8"	┐
v2101(E)	132	#14	49'-7"	—
v2102(E)	132	#14	52'-2"	—
v2103(E)	132	#14	47'-1"	—
v2104(E)	132	#14	54'-8"	—
v2105(E)	120	#11	32'-10"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	467.9
Reinforcement Bars, Epoxy Coated			Pound	371,350
Permanent Casing			Foot	237
Drilled Shaft in Soil			Cu. Yd.	545
Drilled Shaft in Rock			Cu. Yd.	86
Crosshole Sonic Logging Access Ducts			Foot	272
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	272
Thermal Integrity Profile Testing			Each	3


*** Length is height of spiral.

Pier 22
BILL OF MATERIAL


Bar	No.	Size	Length	Shape
h2201(E)	20	#8	56'-2"	—
h2202(E)	36	#9	38'-0"	—
h2203(E)	10	#6	31'-7"	—
h2204(E)	5	#5	5'-5"	—
h2205(E)	4	#5	3'-11"	⌒
hp2201(E)	99	#7	29'-2"	○
hp2202(E)	174	#7	24'-6"	○
n2201(E)	6	#5	3'-10"	┐
p2201(E)	32	#11	26'-0"	┐
p2202(E)	32	#11	51'-5"	┐
p2203(E)	32	#11	57'-9"	—
p2204(E)	28	#7	2'-11"	—
p2205(E)	28	#11	58'-2"	┐
p2206(E)	28	#11	57'-8"	┐
p2207(E)	28	#11	57'-2"	┐
s2201(E)	86	#6	32'-0"	□
s2202(E)	66	#6	19'-4"	□
s2203(E)	66	#6	43'-4"	□
s2204(E)	106	#6	25'-0"	□
s2205(E)	86	#6	9'-4"	┐
s2206(E)	132	#6	13'-4"	┐
s2207(E)	48	#6	16'-6"	□
s2208(E)	47	#6	13'-2"	□
s2209(E)	13	#5	8'-2"	□
s2210(E)	8	#5	5'-5"	┐
*** sp2201(E)	3	#7	12'-6"	〰〰〰
*** sp2202(E)	3	#7	77'-2"	〰〰〰
*** sp2203(E)	3	#7	14'-7"	〰〰〰
u2201(E)	22	#8	22'-5"	⊏
u2202(E)	40	#9	27'-11"	⊏
u2203(E)	12	#7	6'-9"	┐
u2204(E)	12	#7	6'-10"	┐
u2205(E)	20	#7	20'-8"	┐
v2201(E)	132	#14	49'-1"	—
v2202(E)	132	#14	51'-8"	—
v2203(E)	132	#14	46'-7"	—
v2204(E)	132	#14	54'-2"	—
v2205(E)	120	#11	33'-2"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	469.4
Reinforcement Bars, Epoxy Coated			Pound	369,240
Permanent Casing			Foot	234
Drilled Shaft in Soil			Cu. Yd.	538
Drilled Shaft in Rock			Cu. Yd.	86
Crosshole Sonic Logging Access Ducts			Foot	269
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	269
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Notes:
For Pier Plan and Elevation, see sheets 229 thru 231 of 292.
For additional bar details, see sheets 232 and 233 of 292.
Pier 19 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (6,481 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.
Pier 20 vertical load drilled shaft foundation design is based on end bearing in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (24,804 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.
Pier 21 vertical load drilled shaft foundation design is based on side resistance in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (6,122 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.
Pier 22 vertical load drilled shaft foundation design is based on end bearing in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (25,114 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.
The quantities and reinforcement detailing are based on the estimated top of competent rock and the estimated elevations shown and may change based on the actual elevations encountered at each shaft.
Wet construction methods within permanent casing may be required. The Contractor's installation procedure shall clearly address cleaning and inspection methods proposed for use with wet construction methods which will ensure adequate end bearing on rock is achieved.

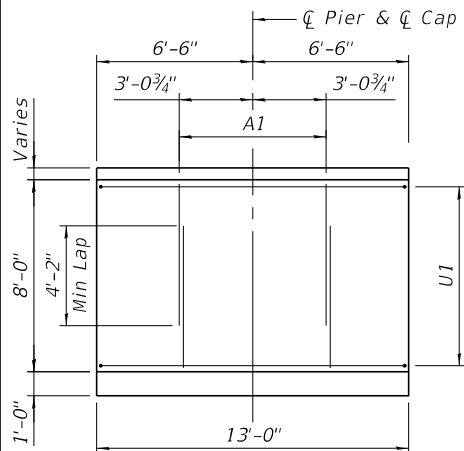


VIEW A-A
(T1 and (3) bars not shown for clarity)

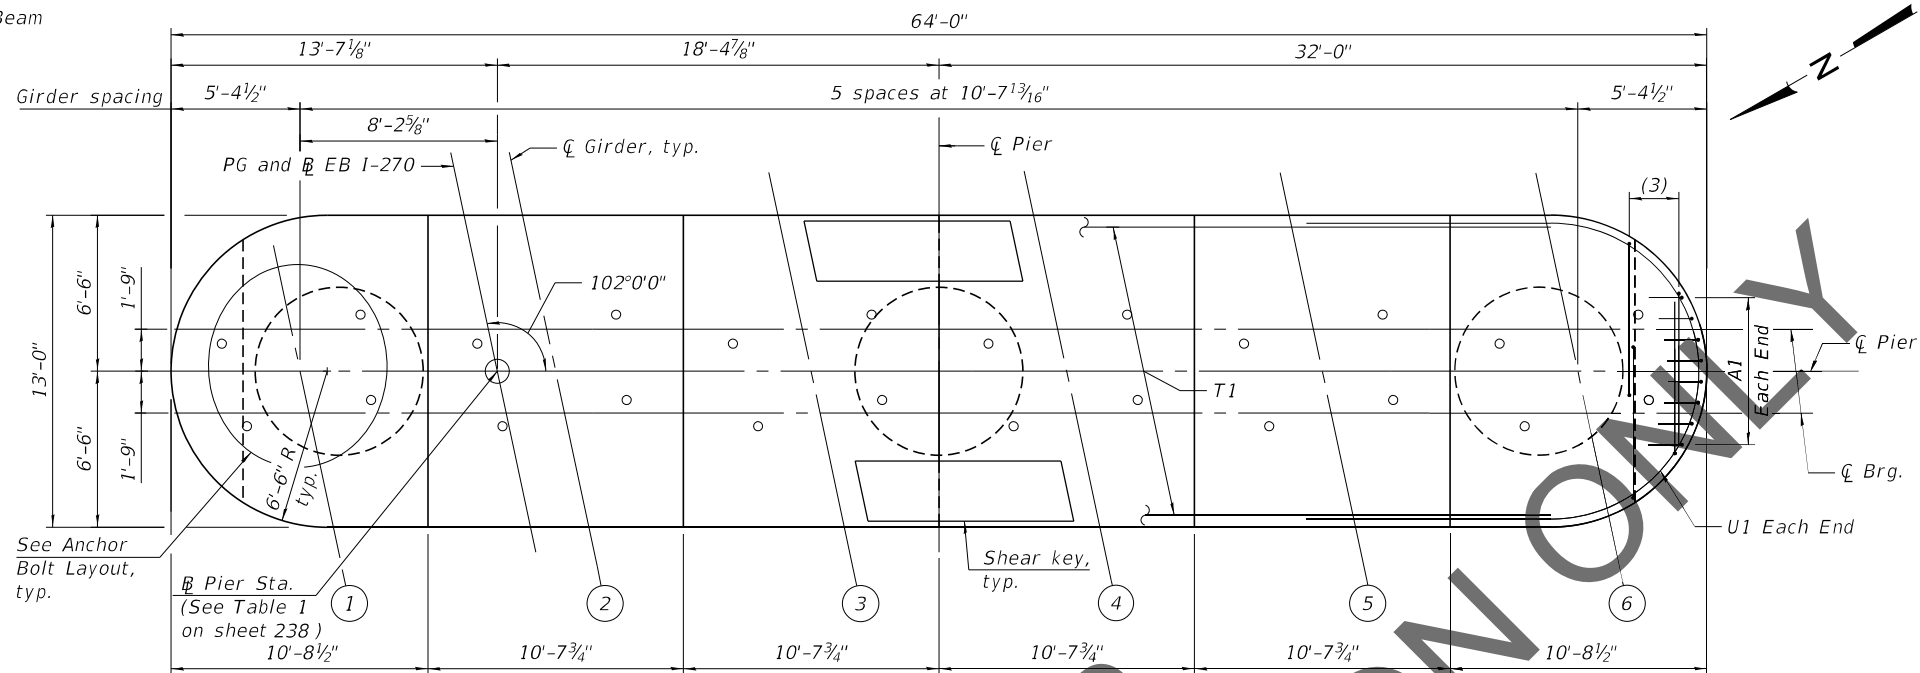


TOP PLAN

Notes:
Space reinforcement in cap to miss anchor bolts.
Pour steps monolithically with cap.

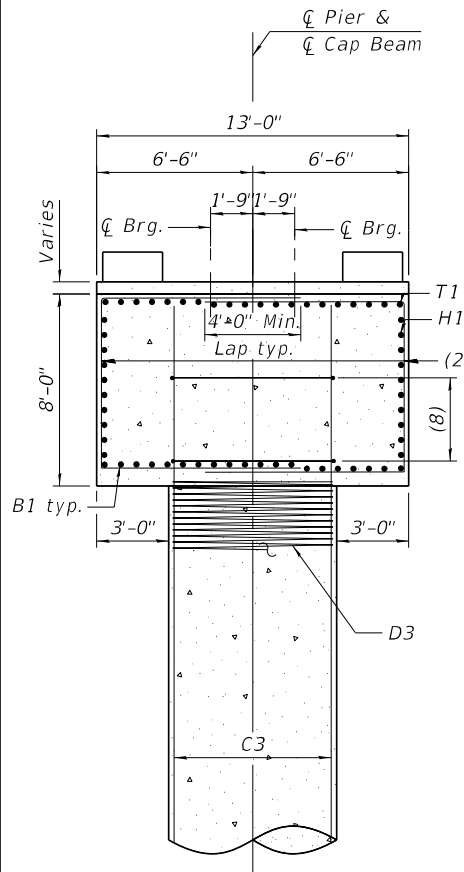


SECTION B-B

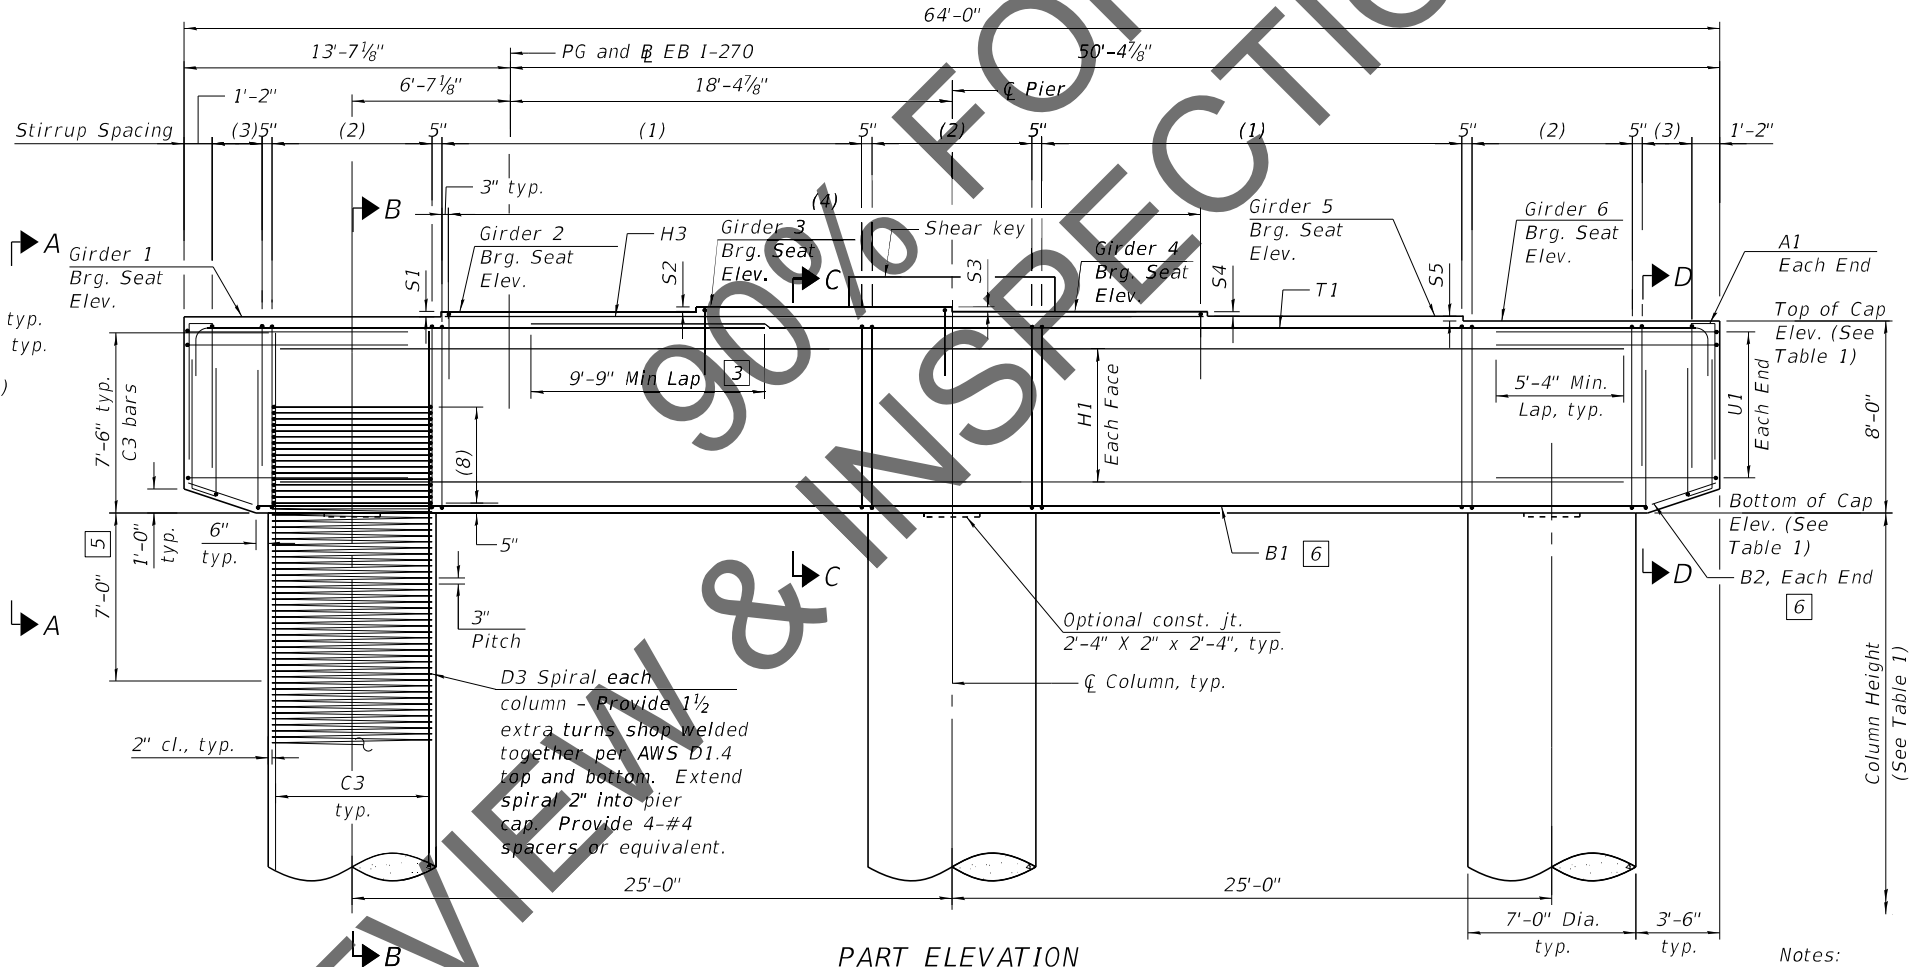


PART ELEVATION
(Looking East)


- [3] Alternate placement cap top rebars to stagger the laps
- [5] No splicing of bars allowed in this region.
- [6] Field cut bars when needed to keep 2" clear concrete cover.

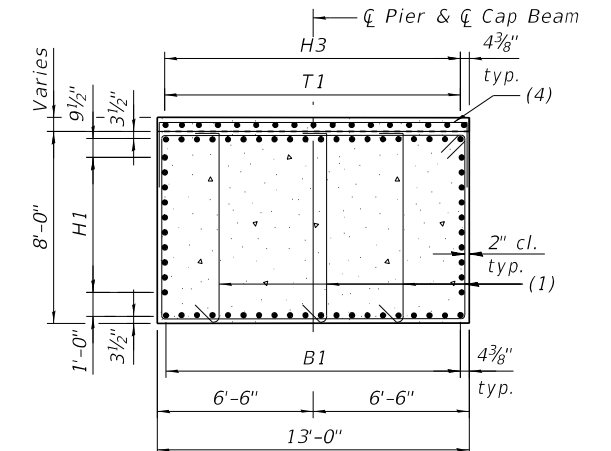

SECTION C-C

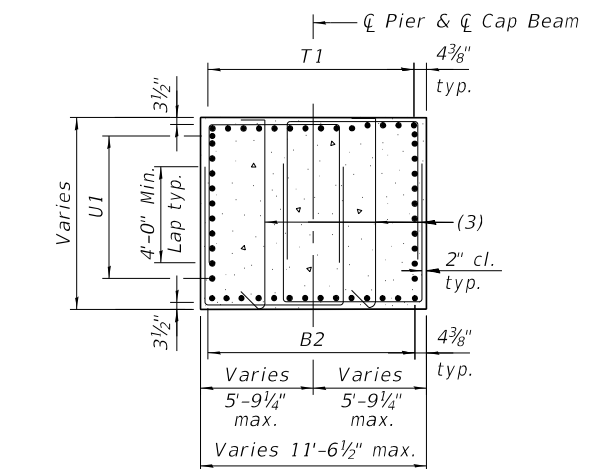

SECTION D-D

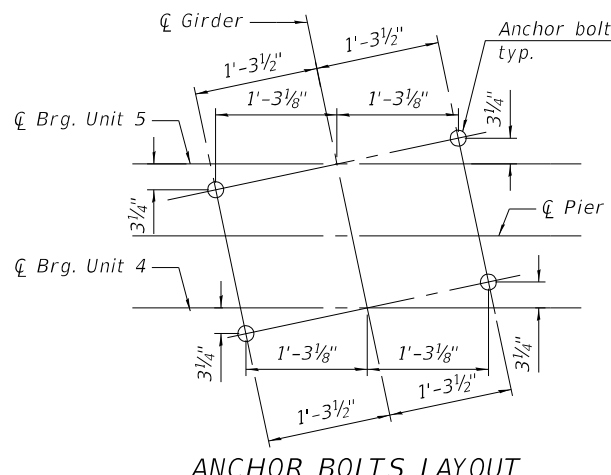

ANCHOR BOLTS LAYOUT

Notes:
For bar details and Bill of Materials see sheets 239 and 240 of 292.
For column height, step height and all elevations, See Table 1 on sheet 238 of 292.
For bearing details, Unit 4, see sheet 159 of 292. for bearing details, Unit 5, see sheet 162 of 292.
For bar callouts and shear key details, see sheet 238 of 292.

MODEL: Default
FILE NAME: C:\C54PDF\917545087_2621060-0350-D876190-caa-70aPPE.dgn
9/10/2021 4:39:36 PM

USER NAME =	DESIGNED - GX	REVISED -
PLOT SCALE =	CHECKED - TMB	REVISED -
PLOT DATE =	DRAWN - JG	REVISED -
	CHECKED - TMB	REVISED -


DESIGNED - GX	REVISED -
CHECKED - TMB	REVISED -
DRAWN - JG	REVISED -
CHECKED - TMB	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


PIER 24 PLAN AND ELEVATION - 2
STRUCTURE NO. 060-0350 (EB)

SHEET 236 OF 292 SHEETS


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	436
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

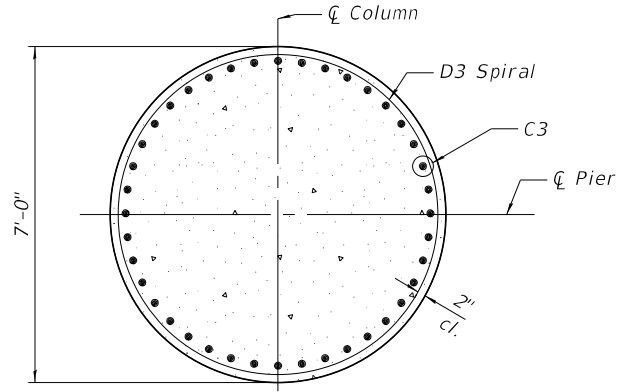


SECTION E-E

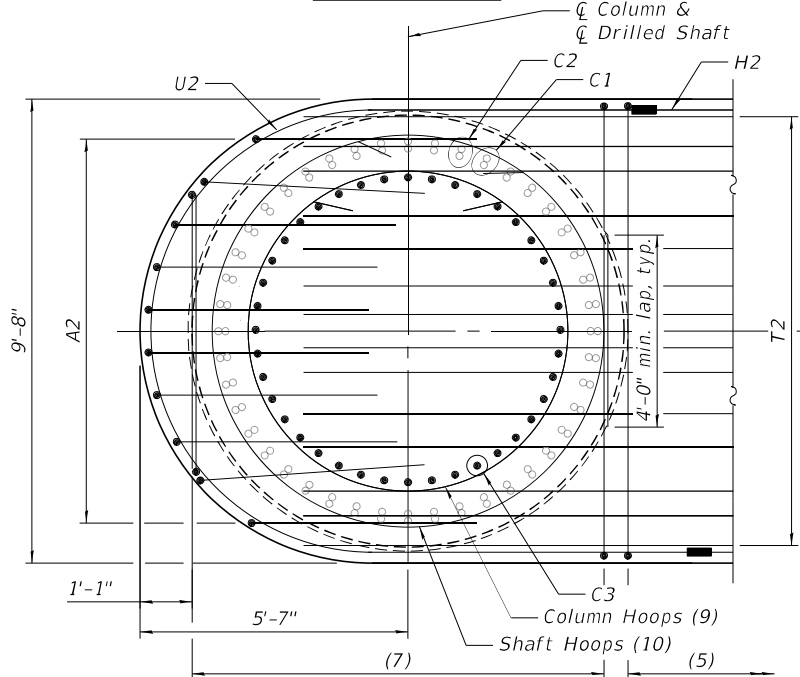


SECTION F-F

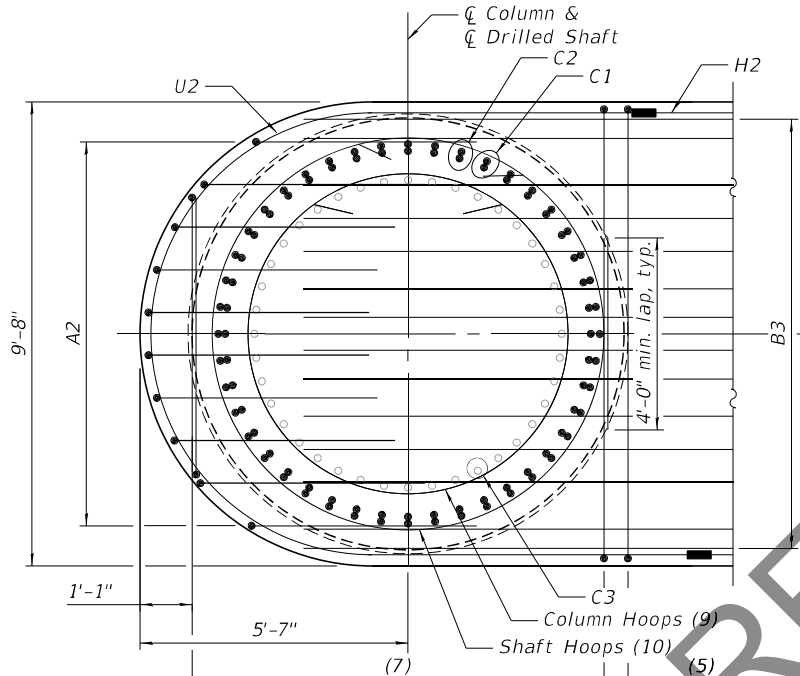


SECTION G-G

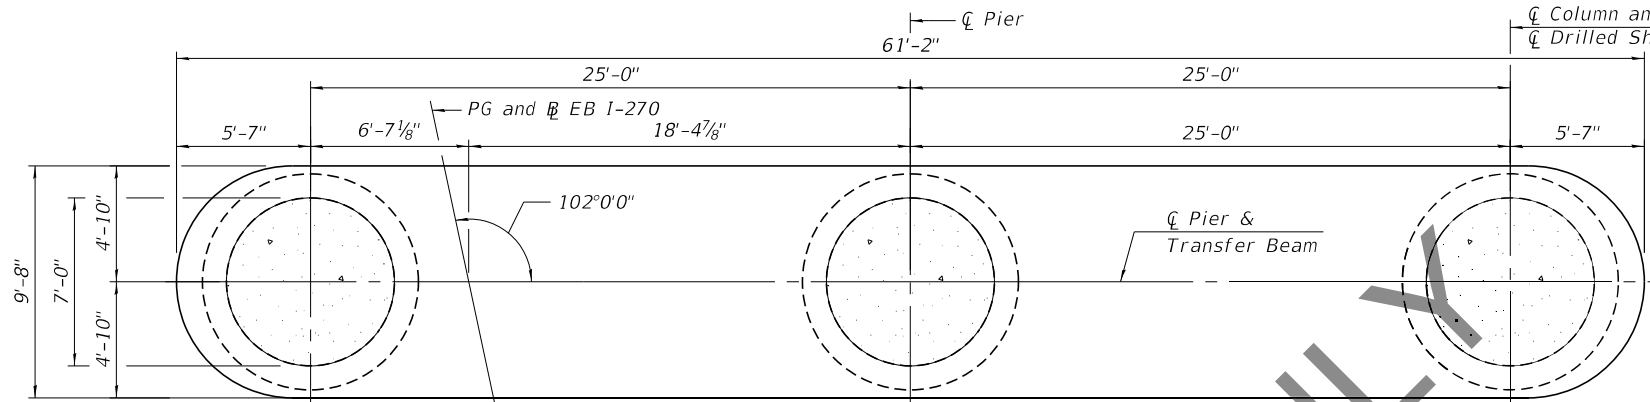

PLAN - TRANSFER BEAM

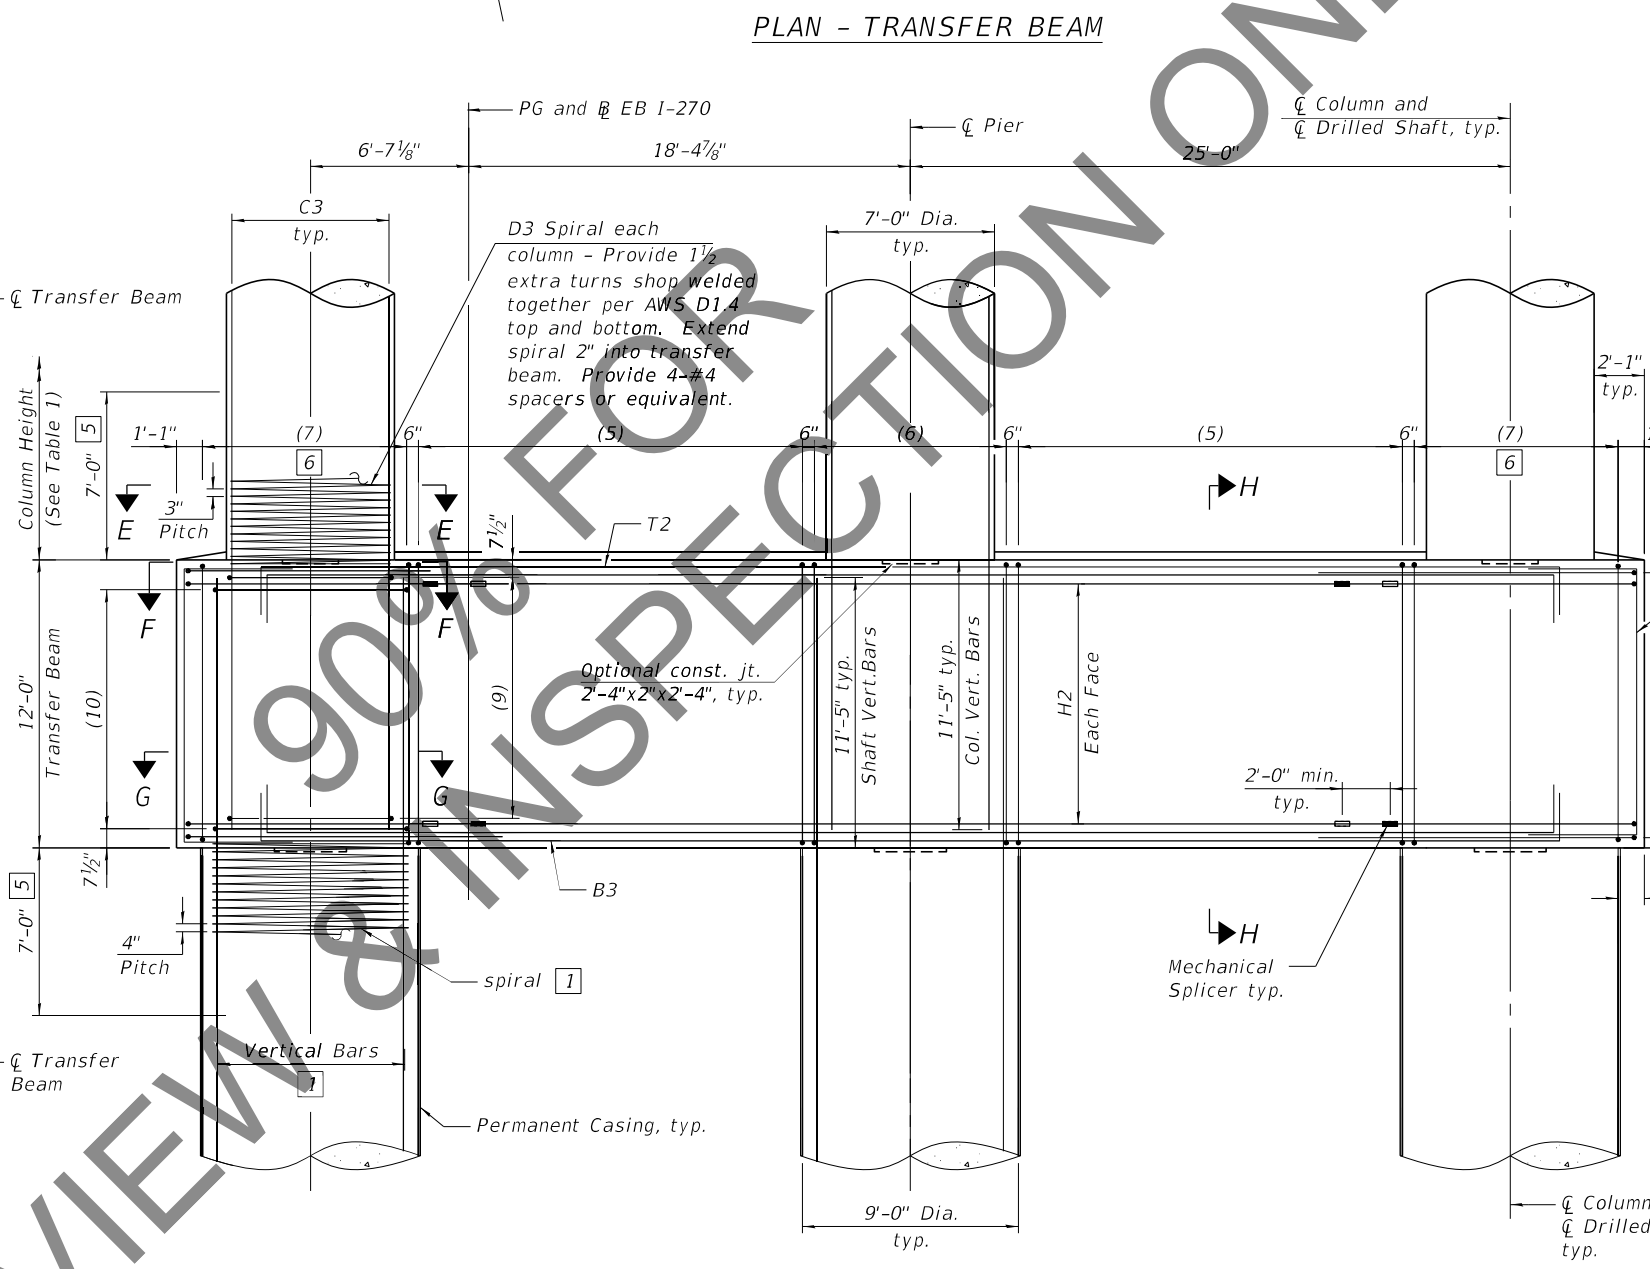

PART ELEVATION - TRANSFER BEAM
(Looking East)

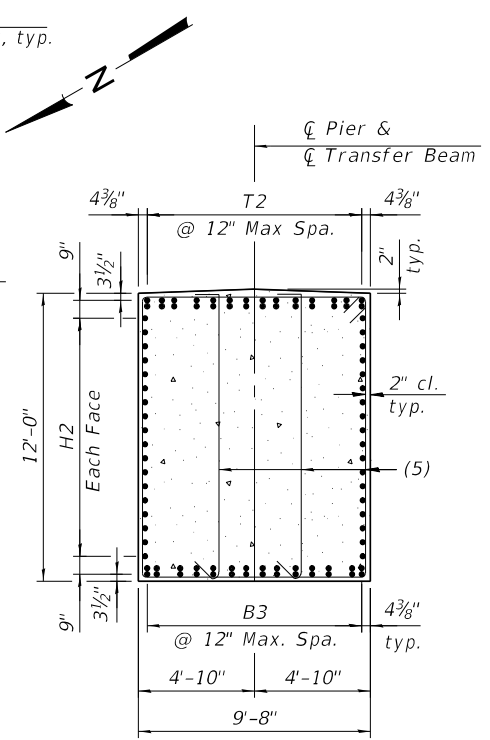

SECTION H-H

- 1 See sheet 237 of 292 for additional rebar placement.
- 2 Adjust transfer beam rebar slightly when conflict with column or shaft vertical bar.
- 5 No splicing of bars allowed in this region.
- 6 Field cut bars when needed to keep 2" clear concrete cover.


Notes:
For Top Plan and Part Elevation, see sheet 235 of 292.
For Drilled Shaft Details, see sheet 237 of 292.
For additional notes, bar details, and Bill of Material, see sheets 238, 239 and 240 of 292.
For Table 1, see sheet 238 of 292.
For Mechanical Splicer details, see sheet 248 of 292.

TABLE 1

		Pier 24
☒ Pier Station		1830+75.02
Bearing Seat Elevation	Girder 1	445.19
	Girder 2	445.41
	Girder 3	445.60
	Girder 4	445.40
	Girder 5	445.21
	Girder 6	445.01
Top of Cap Elevation		445.01
Bottom of Cap Elevation		437.01
Column Height		12'-9 ⁵ / ₈ "
Top of Shaft Elevation		412.20
Approx. Tip Elevation		318.70
Est. Ground Surface Elevation		413.20
Est. Top of Rock Elevation		332.20
Min. bottom of Permanent Casing Elevation		330.20
Dim X		82'-0"
Dim Y		80'-0"
Dim Z		13'-6"
S1		2 ⁵ / ₈ "
S2		2 ¹ / ₄ "
S3		2 ³ / ₈ "
S4		2 ¹ / ₄ "
S5		2 ³ / ₈ "


Pier 24

Mark	Bar Callouts
(1)	43 sets of 1-#6 s2401(E) and 3-#6 s2405(E) at 5" cts.
(2)	11 sets of 2-#6 s2402(E) at 8" cts.
(3)	6 sets of 4-#6 s2407(E) at 5" cts.
(4)	47-#6 s2408(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s2403(E) and 2-#6 s2406(E) at 6" cts.
(6)	17 sets of 2-#6 s2404(E) at 6" cts
(7)	18 sets of 2-#6 s2404(E) at 6" cts.
(8)	14-#7 hp2402(E) hoops at 3"
(9)	44-#7 hp2402(E) hoops at 3"
(10)	33-#7 hp2401(E) hoops at 4"
T1	20-#11 p2401(E) or p2402(E) at 7 ³ / ₄ "
T2	14 bundles of 1-#11 p2405(E) (top) and 1-#11 p2406(E) (bot) at 12" max
B1	20-#11 p2403(E) at 7 ³ / ₄ "
B2	14-#7 p2404(E) at 7 ³ / ₄ "
B3	14 bundles of 1-#11 p2405(E) (bot) and 1-#11 p2406(E) (top) at 12" max
H1	10-#8 h2401(E) at 7 ¹ / ₂ "
H2	18-#9 h2402(E) at 7"
H3	19-#6 h2403(E) at abt. 8 ¹ / ₆ "
A1	8 sets of 1-#7 u2403(E) & 1-#7 u2404(E) at 10 ¹ / ₂ "
A2	10-#7 u2405(E) at 10 ³ / ₄ "
U1	11-#8 u2401(E) space with h2401(E) and p2401(E)
U2	20-#9 u2402(E) splice with h2402(E) and space with p2405(E)
C1	22 bundles of 2-#14 v2401(E) and 2-#14 v2402(E) alternate eq. spa.
C2	22 bundles of 2-#14 v2403(E) and 2-#14 v2404(E) alternate eq. spa.
C3	40-#11 v2405(E) eq. spa.
D1	#7 sp2401(E) at 6" pitch
D2	#7 sp2402(E) at 4" pitch
D3	#7 sp2403(E) at 3" pitch
K1	20-#5 s2409(E) spa. at 5"
K2	3-#5 h2404(E) space with n2401(E)
K3	1-#5 h2404(E) ea. face
K4	2-#5 h2405(E) ea. face
K5	3-#5 n2401(E) at 12" ea. face

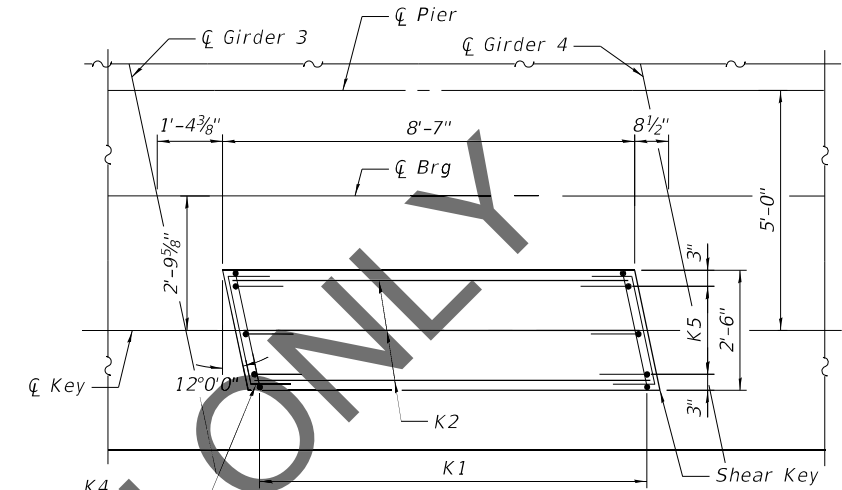

PLAN

Down station key shown.
Up station key mirrored
about ☒ Pier and
opposite hand.

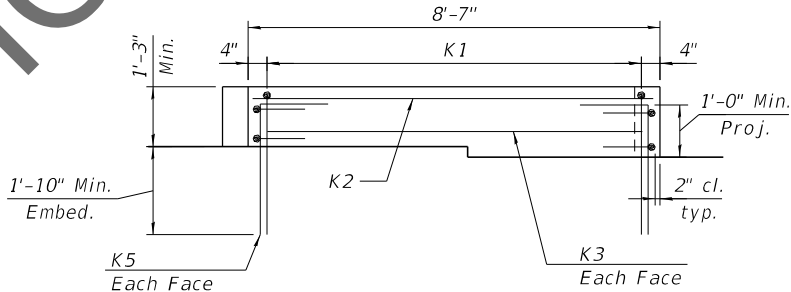

ELEVATION

SHEAR KEY DETAILS


Notes:

For Pier Plan and Elevation, see sheets 235, 236 and 237 of 292 .
For bar details, see sheet 239 of 292 .
For Bill of Material, see sheet 240 of 292 .

MODEL: Default
FILE NAME: C:\CIS4PDF\917545087_123\060-0350-0876\90-caa-74aPRT.dgn
9/10/2021 4:42:45 PM


USER NAME =	DESIGNED - GX	REVISED -
	CHECKED - TMB	REVISED -
PLOT SCALE =	DRAWN - JG	REVISED -
PLOT DATE =	CHECKED - TMB	REVISED -

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	439
			CONTRACT NO. 76J90	
		ILLINOIS	FED. AID PROJECT	

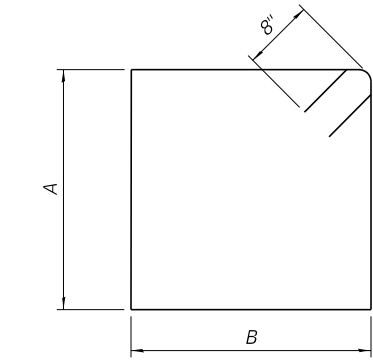


BARS s2401(E) & s2403(E)

Bars	A	B
s2401(E)	7' -8"	12' -8"
s2403(E)	11' -8"	9' -4"




BARS s2402(E) & s2404(E) & s2407(E)

Bars	A	B
s2402(E)	7' -8"	8' -4"
s2404(E)	11' -8"	6' -8"
s2407(E)	6' -4"	5' -10"




BARS s2405(E) & s2406(E)

Bars	A
s2405(E)	7' -8"
s2406(E)	11' -8"

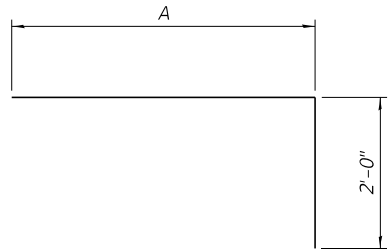


BARS p2401(E) & p2402(E)

Bars	A
p2401(E)	24' -0"
p2402(E)	49' -5"




BARS p2405(E) & p2406(E)

Bars	A
p2405(E)	54' -2"
p2406(E)	53' -8"




BARS u2403(E)

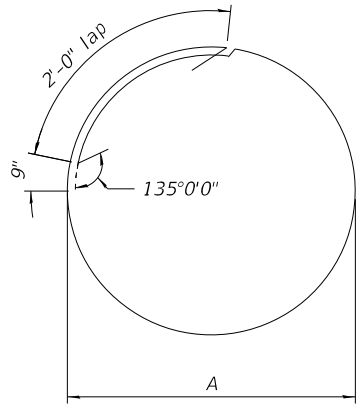


BARS hp2401(E) & hp2402(E)

Bars	A
hp2401(E)	8' -2"
hp2402(E)	6' -8"




BARS u2401(E) & u2402(E)

Bars	A	B	C	R
u2401(E)	5' -4"	19' -8"	5' -4"	6' -3"
u2402(E)	5' -9"	14' -5"	7' -9"	4' -7"

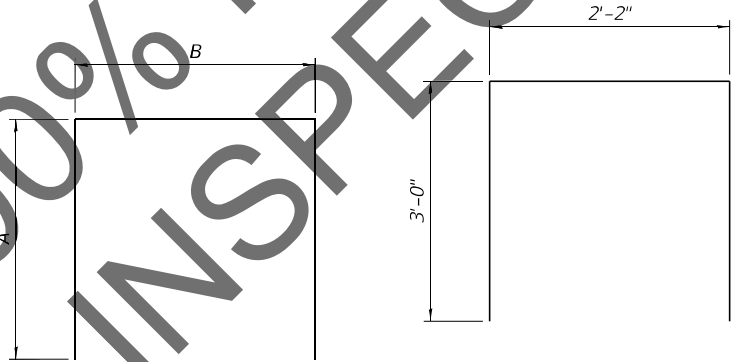


BARS u2405(E) & s2408(E)


Bars	A	B
u2405(E)	4' -7"	11' -6"
s2408(E)	2' -9"	12' -8"




BARS s2409(E)

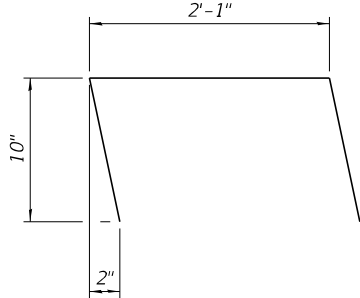

BARS h2405(E)



BARS n2401(E)




BARS u2404(E)

Pier 24
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h2401(E)	20	#8	51'-2"	—
h2402(E)	36	#9	38'-0"	—
h2403(E)	19	#6	31'-7"	—
h2404(E)	10	#5	8'-3"	—
h2405(E)	8	#5	3'-11"	┘
hp2401(E)	99	#7	29'-2"	○
hp2402(E)	174	#7	24'-6"	○
n2401(E)	12	#5	3'-10"	┘
p2401(E)	20	#11	26'-0"	┘
p2402(E)	20	#11	51'-5"	┘
p2403(E)	20	#11	57'-9"	—
p2404(E)	28	#7	2'-11"	—
p2405(E)	28	#11	58'-2"	┘
p2406(E)	28	#11	57'-8"	┘
s2401(E)	86	#6	42'-0"	□
s2402(E)	66	#6	24'-4"	□
s2403(E)	66	#6	43'-4"	□
s2404(E)	106	#6	25'-0"	□
s2405(E)	258	#6	9'-4"	┘
s2406(E)	132	#6	13'-4"	┘
s2407(E)	48	#6	18'-0"	□
s2408(E)	47	#6	18'-2"	□
s2409(E)	40	#5	8'-2"	□
*** sp2401(E)	3	#7	12'-6"	〰
*** sp2402(E)	3	#7	81'-2"	〰
*** sp2403(E)	3	#7	13'-2"	〰
u2401(E)	22	#8	30'-4"	⊂
u2402(E)	40	#9	27'-11"	⊂
u2403(E)	16	#7	6'-9"	┘
u2404(E)	16	#7	6'-10"	┘
u2405(E)	20	#7	20'-8"	□
v2401(E)	132	#14	51'-1"	—
v2402(E)	132	#14	53'-8"	—
v2403(E)	132	#14	47'-8"	—
v2404(E)	132	#14	57'-1"	—
v2405(E)	120	#11	31'-9"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	556.2
Reinforcement Bars, Epoxy Coated			Pound	369,130
Permanent Casing			Foot	246
Drilled Shaft in Soil			Cu. Yd.	566
Drilled Shaft in Rock			Cu. Yd.	86
Concrete Sealer			Sq. Ft.	5,620
Crosshole Sonic Logging Access Ducts			Foot	281
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	281
Thermal Integrity Profile Testing			Each	3


*** Length is height of spiral.

Notes:
For Pier Plan and Elevation, see sheets 235 thru 237 of 292.
For additional bar details, see sheets 238 and 239 of 292.
Pier 24 vertical load drilled shaft foundation design is based on end bearing in bedrock. For vertical load design, penetration into rock is required to achieve the factored resistance used in design (103,790kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.
The quantities and reinforcement detailing are based on the estimated top of competent rock and the estimated elevations shown and may change based on the actual elevations encountered at each shaft.
Wet construction methods within permanent casing may be required. The Contractor's installation procedure shall clearly address cleaning and inspection methods proposed for use with wet construction methods which will ensure adequate end bearing on rock is achieved.

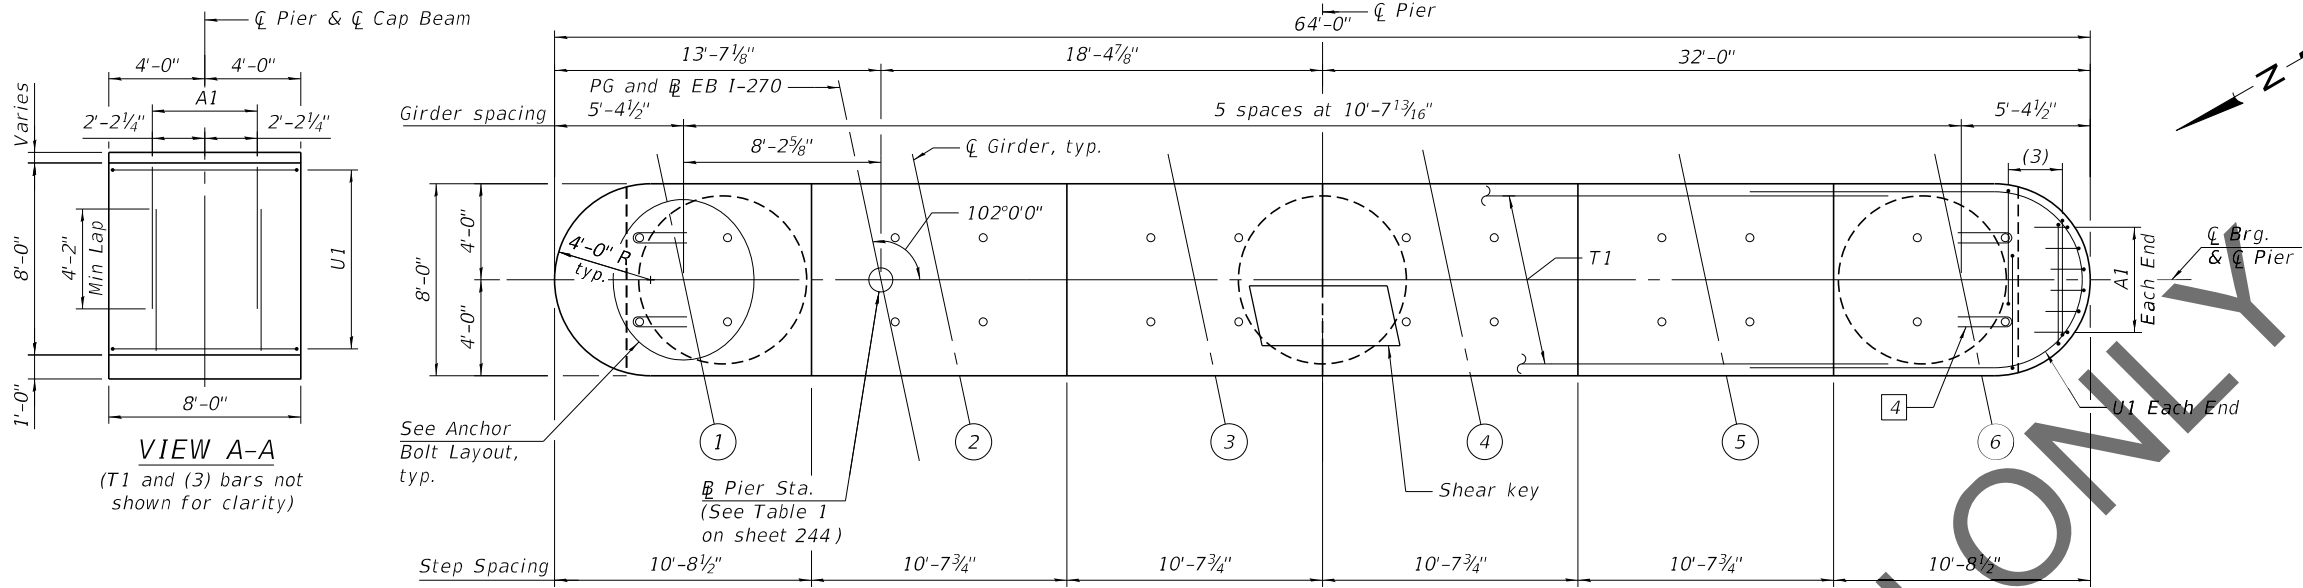


TOP PLAN


Notes:
Space reinforcement in cap to miss anchor bolts.
Pour steps monolithically with cap.

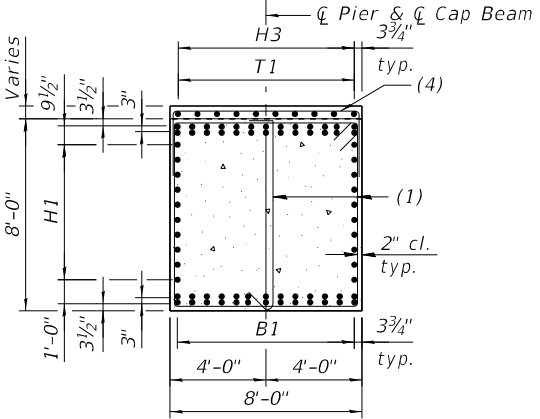

SECTION C-C

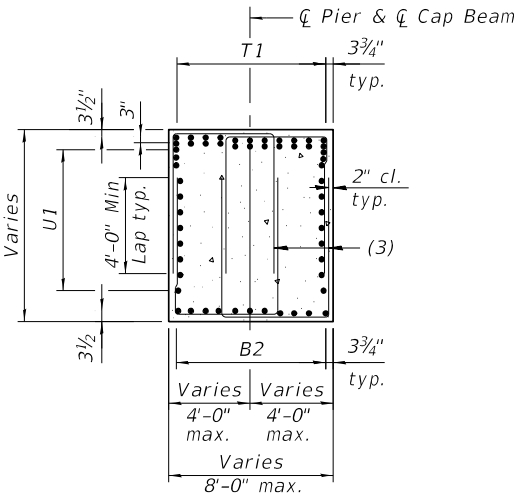

SECTION D-D

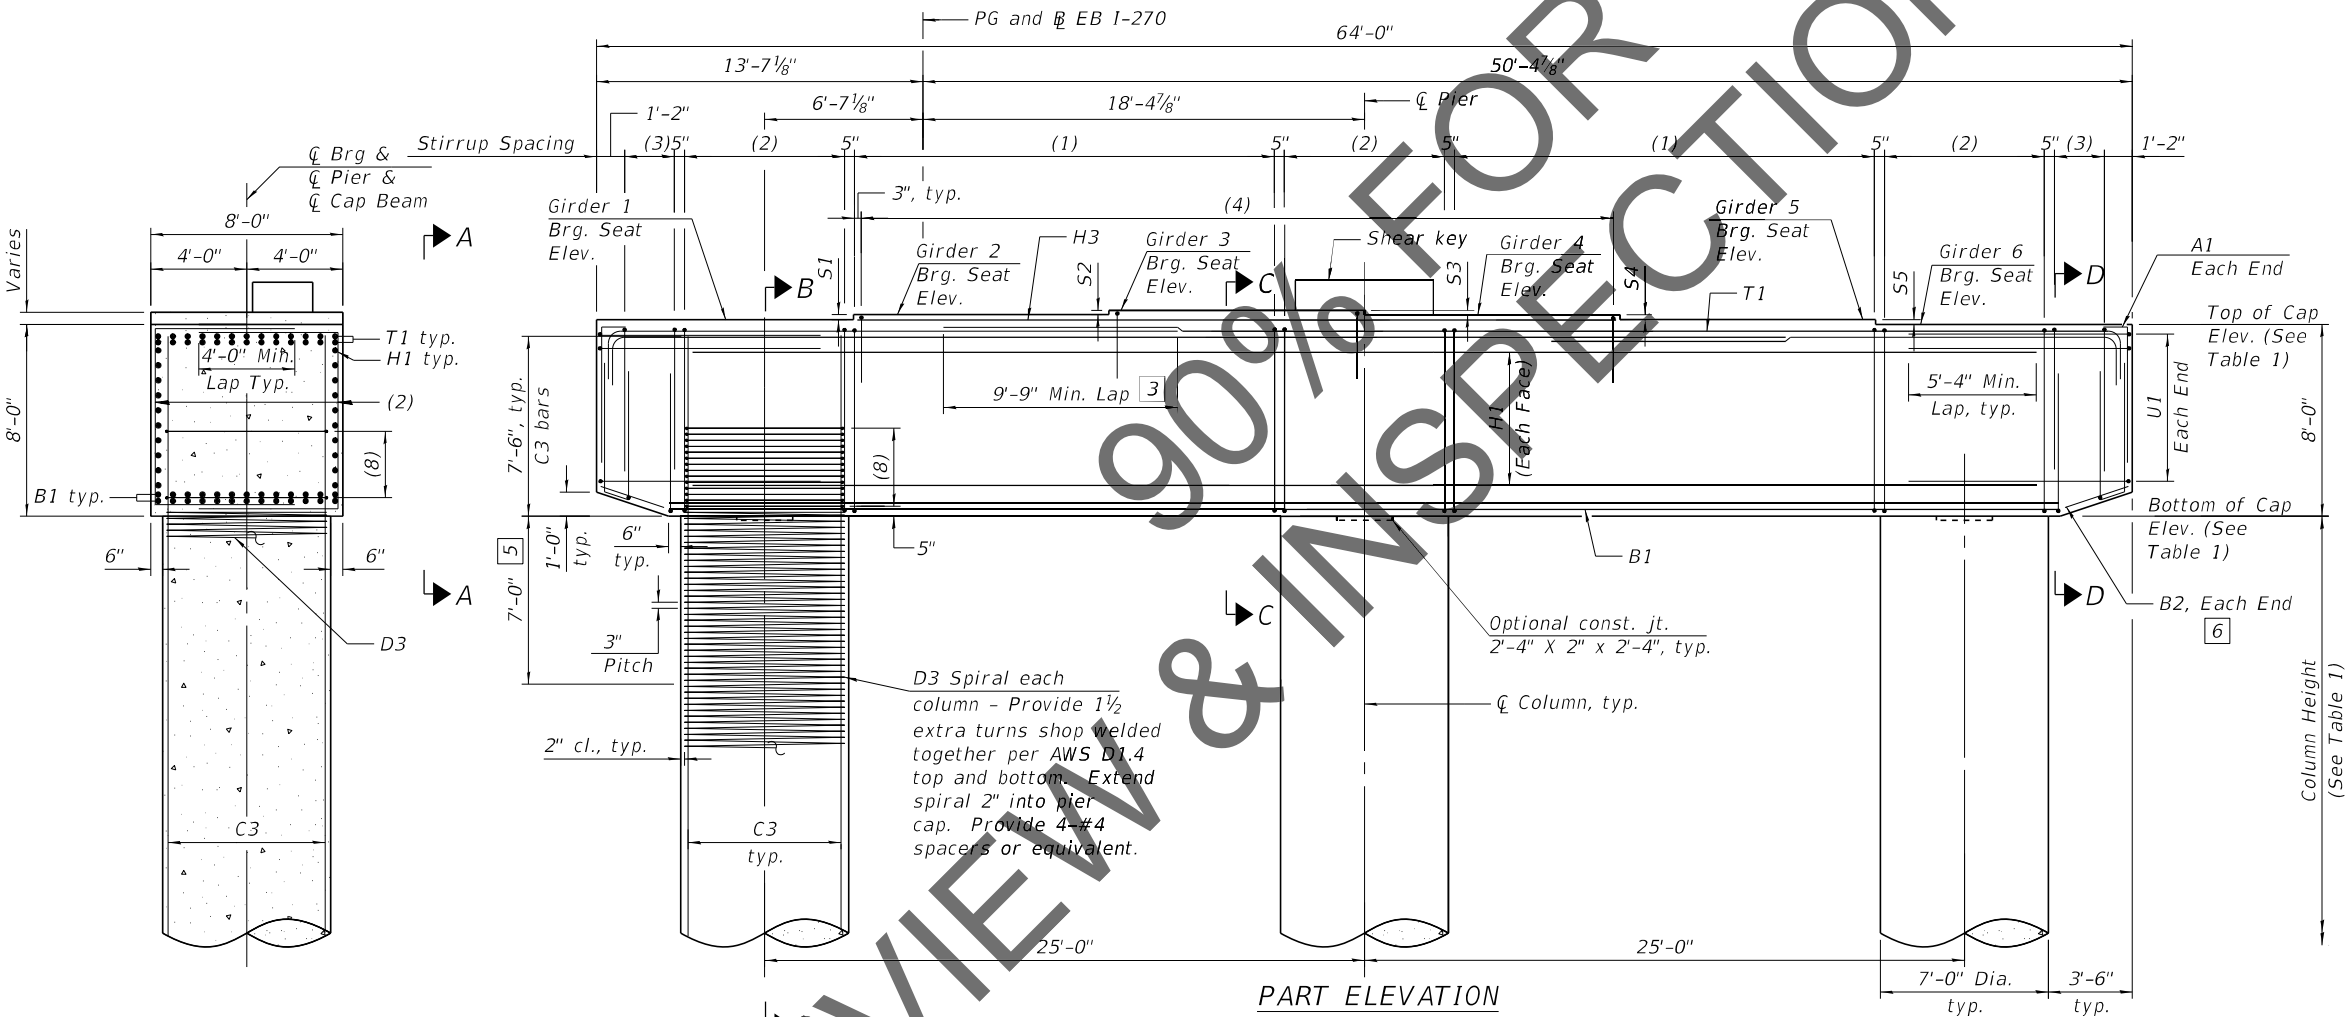


PART ELEVATION

(Looking East)

- [3] Alternate placement cap top rebars to stagger the laps
- [4] Provide 2 - R bar at each anchor shown. Place first R bar with top mat reinforcement and second R bar 6" below top U bar
- [5] No splicing of bars allowed in this region.
- [6] Field cut bars when needed to keep 2" clear concrete cover.


Notes:
For bar details and Bill of Materials see sheets 245 and 246 of 292 .
For column height, step height and all Elevations, See Table 1 on sheet 244 of 292 .
For bearing details, see sheet 160 of 292 .
For bar callouts and shear key details, see sheet 244 of 292 .

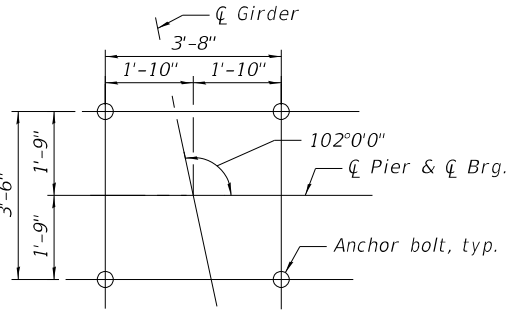


ANCHOR BOLTS LAYOUT

SECTION B-B


MODEL: Default
FILE NAME: C:\C54PDF\920945087_265060-0350-D876\90-cbar77aPPE.dgn
9/11/2021 5:26:25 PM

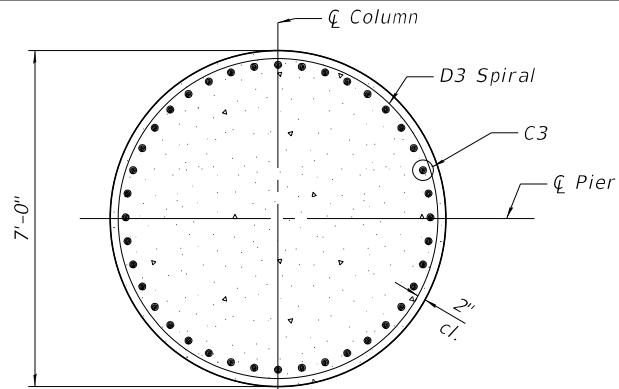


SECTION E-E

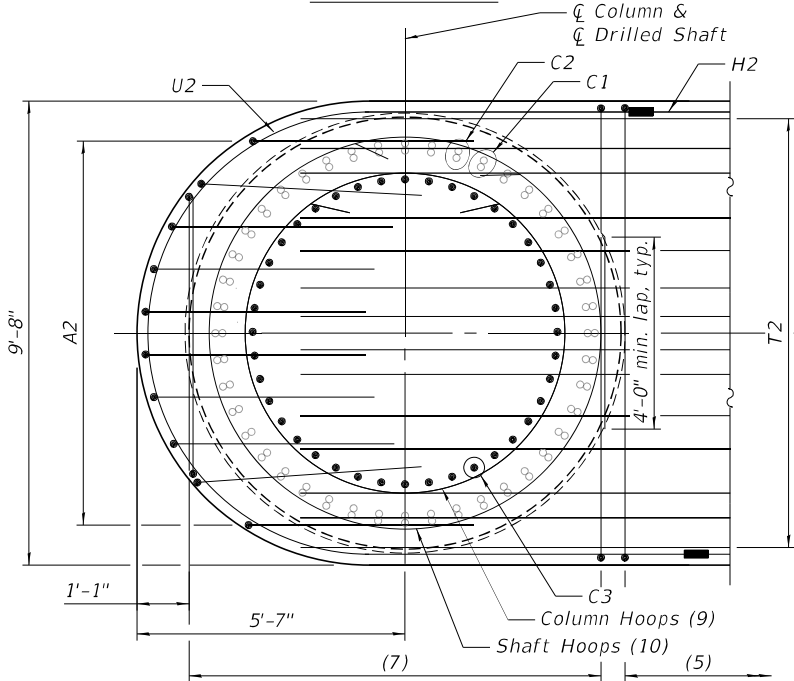


SECTION F-F

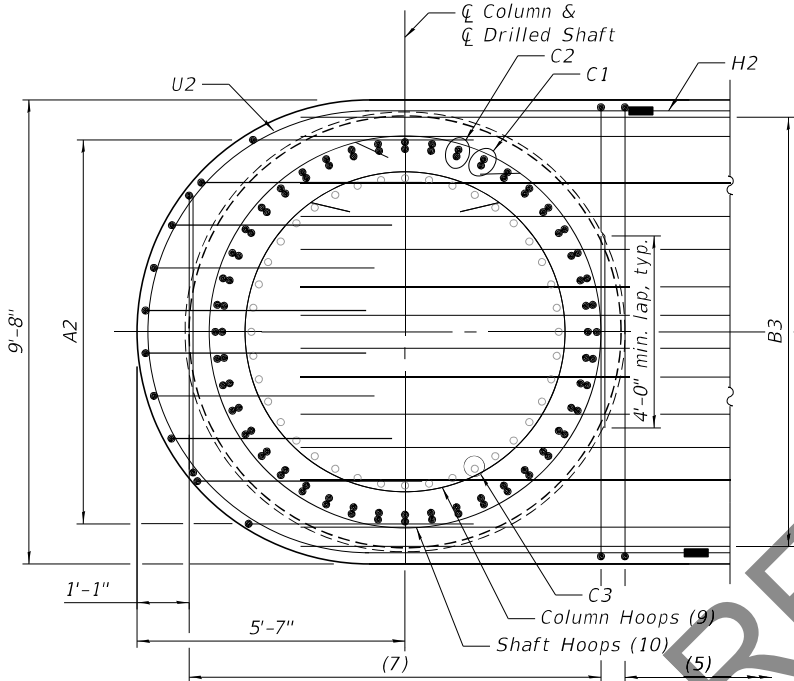


SECTION G-G

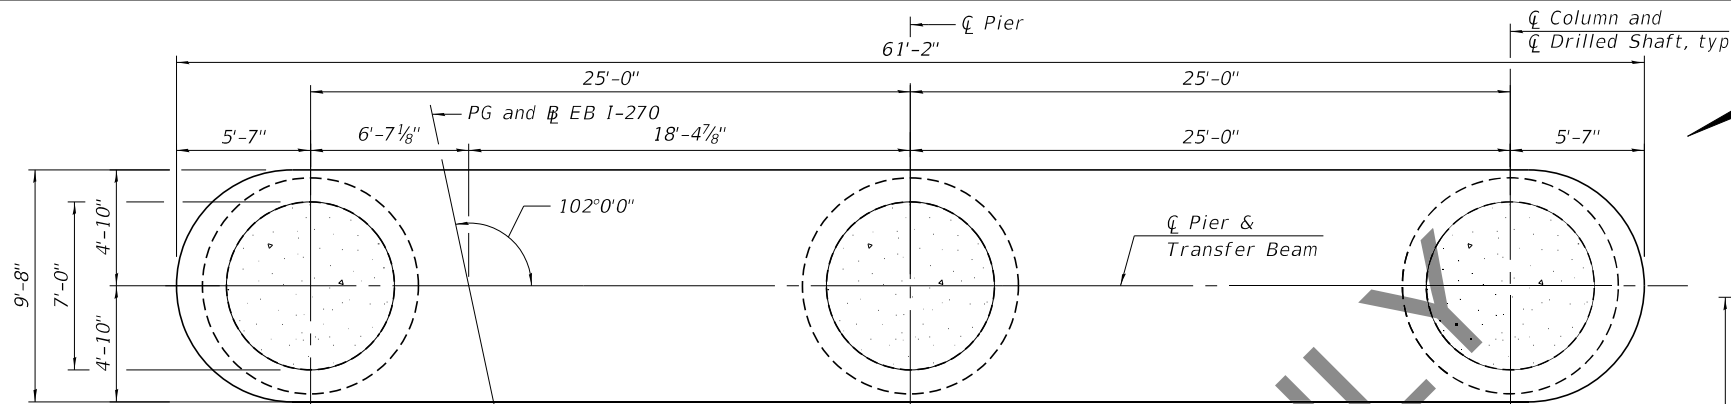

PLAN - TRANSFER BEAM

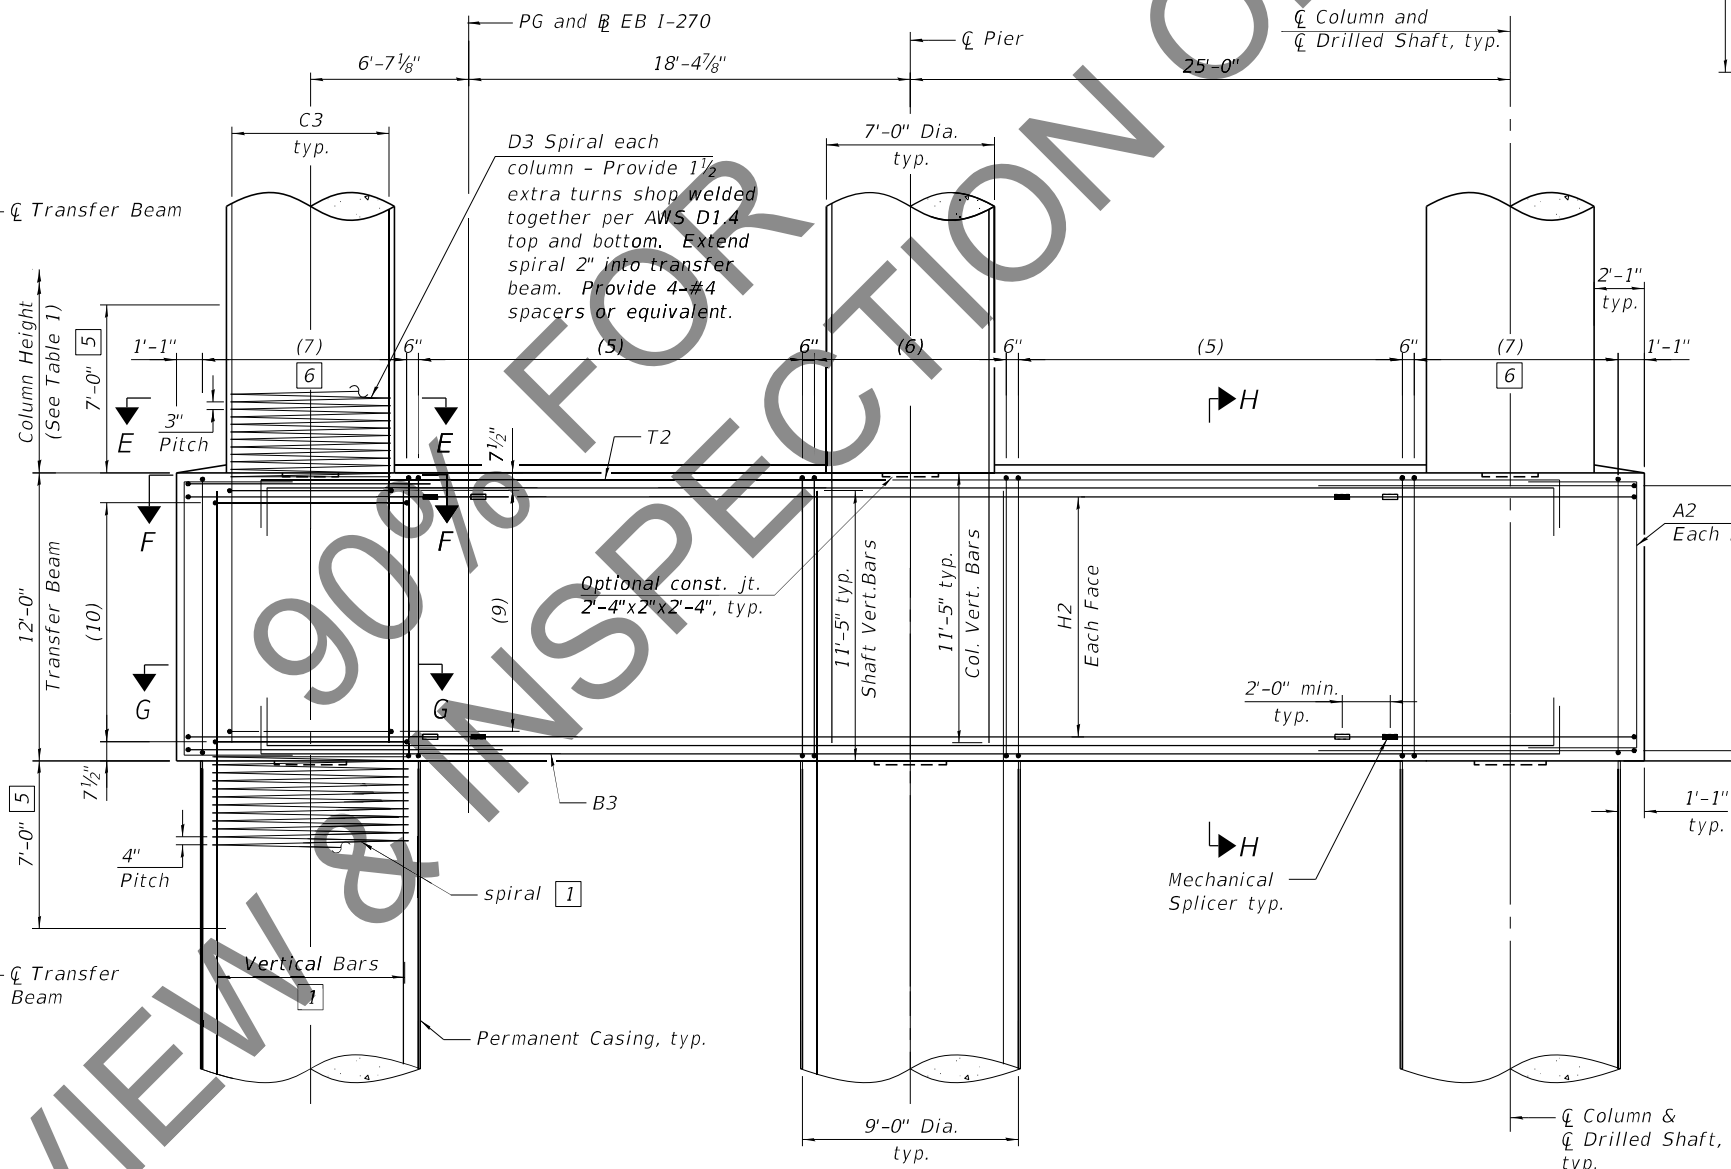

PART ELEVATION - TRANSFER BEAM
(Looking East)

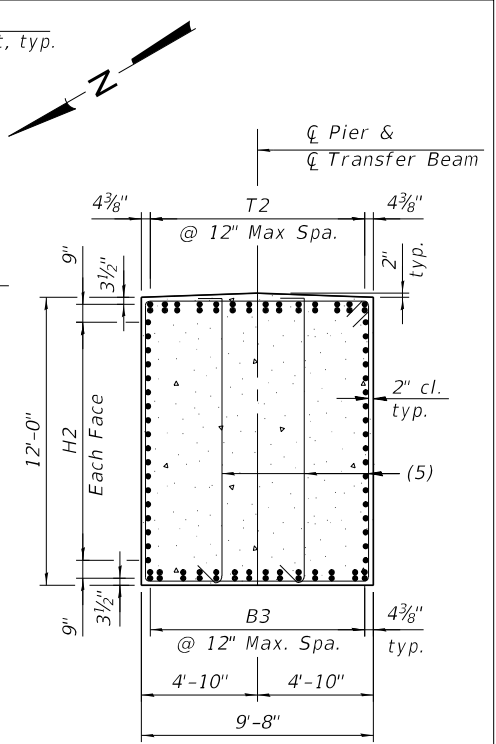

SECTION H-H

- See sheet 243 of 292 for additional rebar placement.
- Adjust transfer beam rebar slightly when conflict with column or shaft vertical bar.
- No splicing of bars allowed in this region.
- Field cut bars when needed to keep 2" clear concrete cover.


Notes:
For Top Plan and Part Elevation, see sheet 241 of 292.
For Drilled Shaft Details, see sheet 243 of 292.
For additional notes, bar details, and Bill of Material, see sheets 244, 245 and 246 of 292.
For Table 1, see sheet 244 of 292.
For Mechanical Splicer details, see sheet 248 of 292.

TABLE 1

		Pier 25
☒ Pier Station		1832+56.56
Bearing Seat Elevation	Girder 1	445.24
	Girder 2	445.46
	Girder 3	445.64
	Girder 4	445.45
	Girder 5	445.25
	Girder 6	445.05
Top of Cap Elevation		445.05
Bottom of Cap Elevation		437.05
Column Height		13'-9"
Top of Shaft Elevation		411.30
Approx. Tip Elevation		318.80
Est. Ground Surface Elevation		412.30
Est. Top of Rock Elevation		332.30
Min. bottom of Permanent Casing Elevation		330.30
Dim X		81'-0"
Dim Y		79'-0"
Dim Z		13'-6"
S1		2 5⁄8 "
S2		2 1⁄8 "
S3		2 ¼ "
S4		2 3⁄8 "
S5		2 3⁄8 "

Pier 25


Mark	Bar Callouts
(1)	43 sets of 1-#6 s2501(E) and 1-#6 s2505(E) at 5" cts.
(2)	11 sets of 2-#6 s2502(E) at 8" cts.
(3)	6 sets of 4-#6 s2507(E) at 5" cts.
(4)	47-#6 s2508(E) at abt. 8" cts.
(5)	33 sets of 1-#6 s2503(E) and 2-#6 s2506(E) at 6" cts.
(6)	17 sets of 2-#6 s2504(E) at 6" cts
(7)	18 sets of 2-#6 s2504(E) at 6" cts.
(8)	14-#7 hp2502(E) hoops at 3"
(9)	44-#7 hp2502(E) hoops at 3"
(10)	33-#7 hp2501(E) hoops at 4"
T1	2 layers of 13-#11 p2501(E) or p2502(E) at 7 3⁄8"
T2	14 bundles of 1-#11 p2505(E) (top) and 1-#11 p2506(E) (bot) at 12" max
B1	2 layers of 13-#11 p2503(E) at 7 3⁄8"
B2	11-#7 p2504(E) at 7 3⁄8"
B3	14 bundles of 1-#11 p2505(E) (bot) and 1-#11 p2506(E) (top) at 12" max
H1	10-#8 h2501(E) at 7 1⁄2"
H2	18-#9 h2502(E) at 7"
H3	10-#6 h2503(E) at abt. 9 3⁄4"
A1	6 sets of 1-#7 u2503(E) & 1-#7 u2504(E) at 10 1⁄2"
A2	10-#7 u2505(E) at 10 3⁄4"
U1	11-#8 u2501(E) space with h2501(E) and p2501(E)
U2	20-#9 u2502(E) splice with h2502(E) and space with p2505(E)
C1	22 bundles of 2-#14 v2501(E) and 2-#14 v2502(E) alternate eq. spa.
C2	22 bundles of 2-#14 v2503(E) and 2-#14 v2504(E) alternate eq. spa.
C3	40-#11 v2505(E) eq. spa.
D1	#7 sp2501(E) at 6" pitch
D2	#7 sp2502(E) at 4" pitch
D3	#7 sp2503(E) at 3" pitch
K1	13-#5 s2509(E) spa. at 5"
K2	3-#5 h2504(E) space with n2501(E)
K3	1-#5 h2504(E) ea. face
K4	2-#5 h2505(E) ea. face
K5	3-#5 n2501(E) at 12" ea. face
R	#5 s2510(E)

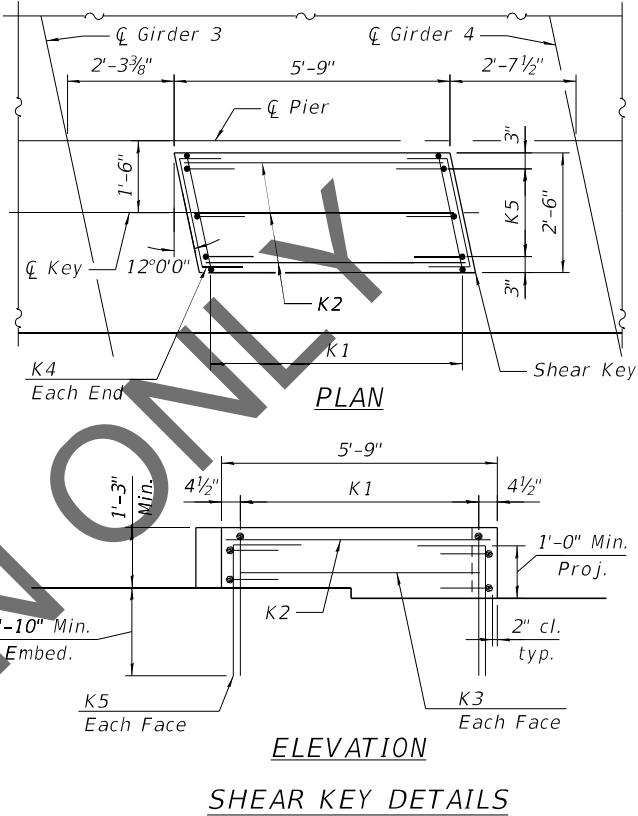

Notes:
For Pier Plan and Elevation, see sheets 241, 242 and 243 of 292.
For bar details, see sheet 245 of 292.
For Bill of Material, see sheet 246 of 292.


MODEL: Default
FILE NAME: C:\CS4PDF\917545087_125\060-0350-D876\90-cbar*79aPRT.dgn
9/10/2021 4:37:58 PM

MODEL: Default
FILE NAME: C:\C54PDF\917545087_126\060-0350-0876\90-cba-80aPRT.dgn
9/10/2021 4:38:08 PM




BARS s2501(E) & s2503(E)

Bars	A	B
s2501(E)	7' -8"	7' -8"
s2503(E)	11' -8"	9' -4"




BARS s2502(E) & s2504(E) & s2507(E)

Bars	A	B
s2502(E)	7' -8"	5' -10"
s2504(E)	11' -8"	6' -8"
s2507(E)	4' -10"	5' -10"




BARS s2505(E) & s2506(E)

Bars	A
s2505(E)	7' -8"
s2506(E)	11' -8"




BARS p2501(E) & p2502(E)

Bars	A
p2501(E)	24' -0"
p2502(E)	49' -5"




BARS p2505(E) & p2506(E)

Bars	A
p2505(E)	54' -2"
p2506(E)	53' -8"




BARS u2503(E)

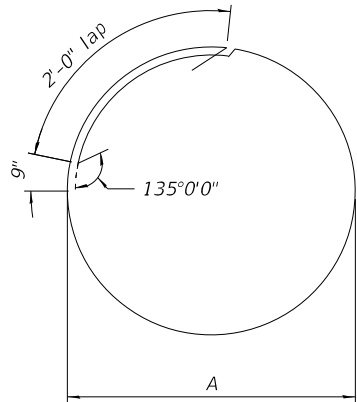


BARS hp2501(E) & hp2502(E)

Bars	A
hp2501(E)	8' -2"
hp2502(E)	6' -8"




BARS u2501(E) & u2502(E)

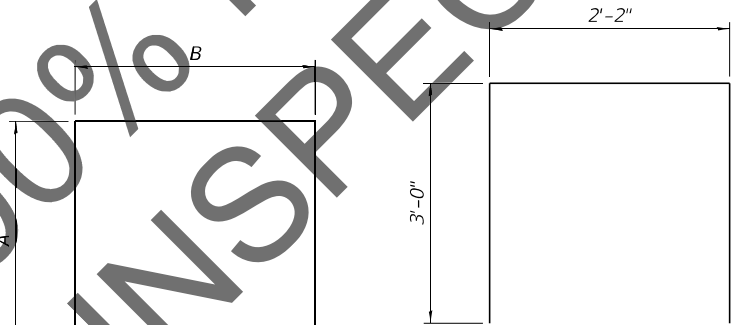


BARS u2505(E) & s2508(E)


Bars	A	B
u2505(E)	4' -7"	11' -6"
s2508(E)	2' -9"	7' -8"




BARS s2509(E)




BARS h2505(E)



BARS n2501(E)



BARS s2510(E)



BARS u2504(E)

Pier 25
BILL OF MATERIAL

Bar	No.	Size	Length	Shape
h2501(E)	20	#8	56'-2"	—
h2502(E)	36	#9	38'-0"	—
h2503(E)	10	#6	31'-7"	—
h2504(E)	5	#5	5'-5"	—
h2505(E)	4	#5	3'-11"	┘
hp2501(E)	99	#7	29'-2"	○
hp2502(E)	174	#7	24'-6"	○
n2501(E)	6	#5	3'-10"	┘
p2501(E)	26	#11	26'-0"	┘
p2502(E)	26	#11	51'-5"	┘
p2503(E)	26	#11	57'-9"	—
p2504(E)	22	#7	2'-11"	—
p2505(E)	28	#11	58'-2"	┘
p2506(E)	28	#11	57'-8"	┘
s2501(E)	86	#6	32'-0"	□
s2502(E)	66	#6	19'-4"	□
s2503(E)	66	#6	43'-4"	□
s2504(E)	106	#6	25'-0"	□
s2505(E)	86	#6	9'-4"	┘
s2506(E)	132	#6	13'-4"	┘
s2507(E)	48	#6	16'-6"	□
s2508(E)	47	#6	13'-2"	□
s2509(E)	13	#5	8'-2"	□
s2510(E)	8	#5	5'-5"	▯
*** sp2501(E)	3	#7	12'-6"	〰〰〰
*** sp2502(E)	3	#7	80'-2"	〰〰〰
*** sp2503(E)	3	#7	14'-1"	〰〰〰
u2501(E)	22	#8	22'-5"	┘
u2502(E)	40	#9	27'-11"	┘
u2503(E)	12	#7	6'-9"	┘
u2504(E)	12	#7	6'-10"	┘
u2505(E)	20	#7	20'-8"	□
v2501(E)	132	#14	50'-7"	—
v2502(E)	132	#14	53'-2"	—
v2503(E)	132	#14	48'-1"	—
v2504(E)	132	#14	55'-8"	—
v2505(E)	120	#11	32'-8"	—
Structure Excavation			Cu. Yd.	32
Concrete Structures			Cu. Yd.	467.6
Reinforcement Bars, Epoxy Coated			Pound	366,290
Permanent Casing			Foot	243
Drilled Shaft in Soil			Cu. Yd.	559
Drilled Shaft in Rock			Cu. Yd.	86
Crosshole Sonic Logging Access Ducts			Foot	278
Crosshole Sonic Logging Testing			Each	3
Thermal Integrity Profile Data Collection			Foot	278
Thermal Integrity Profile Testing			Each	3

*** Length is height of spiral.

Notes:
For Pier Plan and Elevation, see sheets 241 thru 243 of 292.
For additional bar details, see sheets 244 and 245 of 292.
Pier 25 vertical load drilled shaft foundation design is based on end bearing in bedrock.
For vertical load design, penetration into rock is required to achieve the factored resistance used in design (16,180 kip). The limits shown for drilled shaft in rock is the minimum penetration required to achieve lateral fixity in rock for lateral load design.
The quantities and reinforcement detailing are based on the estimated top of competent rock and the estimated elevations shown and may change based on the actual elevations encountered at each shaft.
Wet construction methods within permanent casing may be required. The Contractor's installation procedure shall clearly address cleaning and inspection methods proposed for use with wet construction methods which will ensure adequate end bearing on rock is achieved.

MODEL: Default
FILE NAME: C:\C54PDF\F917545087_127\060-0350-0876\96-cba-81aPBM.dgn
9/10/2021 4:38:05 PM

HORNER SHIFRIN

Teaming with: PARSONS


USER NAME =	DESIGNED - TMB	REVISED -
	CHECKED - GX/EJA	REVISED -
PLOT SCALE =	DRAWN - TMB	REVISED -
PLOT DATE =	CHECKED - GX	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 25 BILL OF MATERIALS
STRUCTURE NO. 060-0350 (EB)


SHEET 246 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	446
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				




STEEL PILE TABLE

Designation	Depth d	Flange width bf	Web and Flange thickness t	Encasement diameter A
HP 14x117	14 1/4"	14 7/8"	1 3/16"	30"
x102	14"	14 3/4"	1 1/16"	30"
x89	13 7/8"	14 3/4"	5/8"	30"
x73	13 5/8"	14 5/8"	1/2"	30"
HP 12x84	12 1/4"	12 1/4"	1 1/16"	24"
x74	12 1/8"	12 1/4"	5/8"	24"
x63	12"	12 1/8"	1/2"	24"
x53	11 3/4"	12"	7/16"	24"
HP 10x57	10"	10 1/4"	9/16"	24"
x42	9 3/4"	10 1/8"	7/16"	24"
HP 8x36	8"	8 1/8"	7/16"	18"

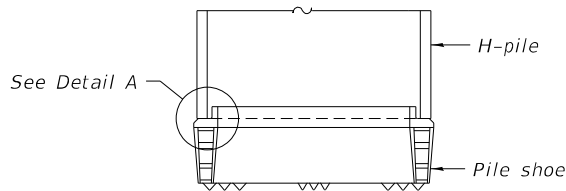


ELEVATION

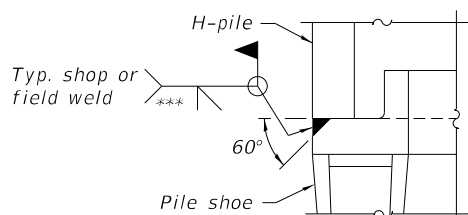


DETAIL A

SHOE ATTACHMENT


Note:
The steel H-piles shall be according to
AASHTO M270 Grade 50.

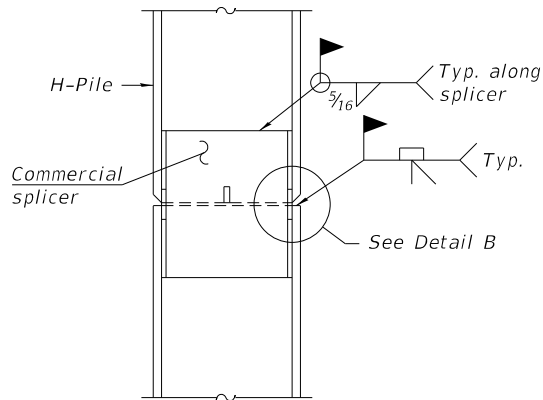

ELEVATION




DETAIL "B"

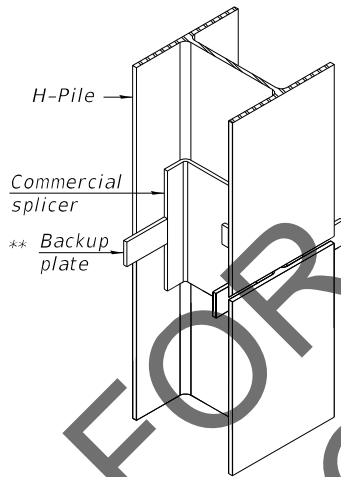

ISOMETRIC VIEW


WELDED COMMERCIAL SPLICE

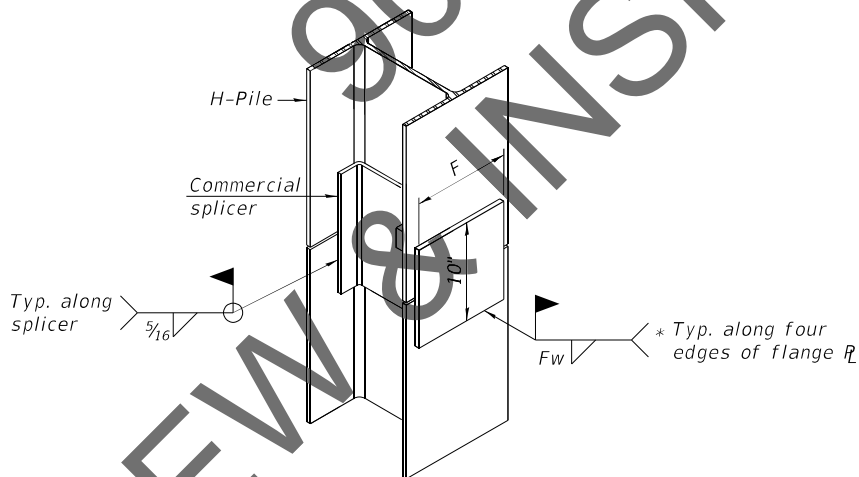


ISOMETRIC VIEW

WELDED COMMERCIAL SPLICE ALTERNATE

- * Interrupt welds 1/4" from end of web and/or each flange.
- ** Remove portions of backup plates that extend outside the flanges.
- *** Weld size per pile shoe manufacturer (5/16" min.).

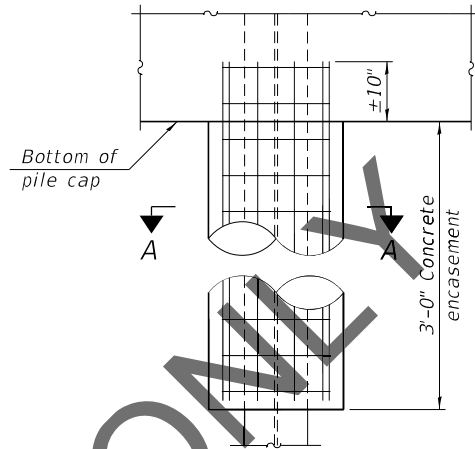


ELEVATION

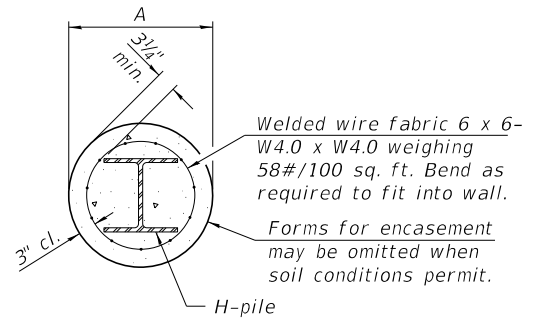


SECTION A-A


INDIVIDUAL PILE
CONCRETE ENCASUREMENT
(when specified)

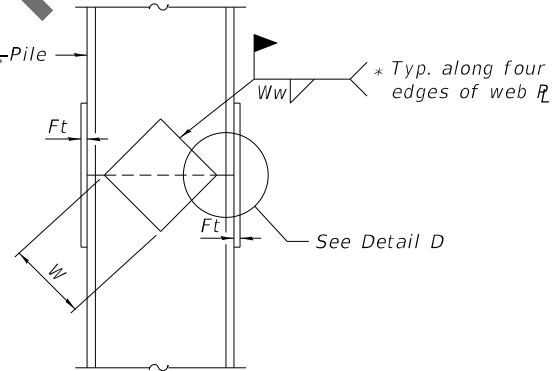

ELEVATION

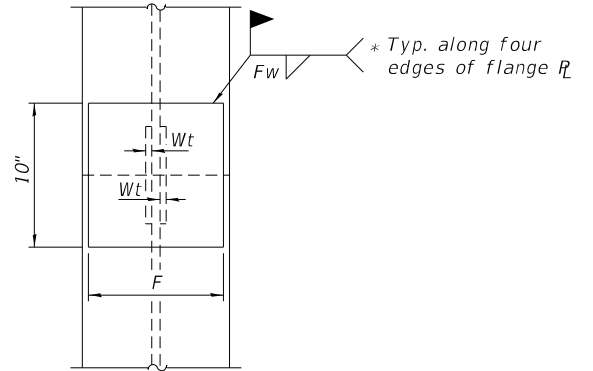

END VIEW



DETAIL D

WELDED PLATE FIELD SPLICE

Designation	F	Ft	Fw	W	Wt	Ww
HP 14x117	12 1/2"	1"	7/8"	7 3/4"	5/8"	1/2"
x102	12 1/2"	7/8"	3/4"	7 3/4"	5/8"	1/2"
x89	12 1/2"	3/4"	1 1/16"	7 3/4"	5/8"	1/2"
x73	12 1/2"	5/8"	9/16"	7 3/4"	5/8"	1/2"
HP 12x84	10"	7/8"	1 1/16"	6 1/2"	5/8"	1/2"
x74	10"	7/8"	1 1/16"	6 1/2"	5/8"	1/2"
x63	10"	5/8"	1/2"	6 1/2"	1/2"	3/8"
x53	10"	5/8"	1/2"	6 1/2"	1/2"	3/8"
HP 10x57	8"	3/4"	9/16"	5 1/4"	1/2"	3/8"
x42	8"	5/8"	9/16"	5 1/4"	1/2"	3/8"
HP 8x36	7"	5/8"	7/16"	4 1/4"	1/2"	3/8"

F-HP

1-1-2020

HORNER SHIFRIN
PARSONS

USER NAME =
PLOT SCALE =
PLOT DATE =

DESIGNED - NHP
CHECKED - GLC
DRAWN - EAT
CHECKED - BTF

REVISED -
REVISED -
REVISED -
REVISED -


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

HP PILE DETAILS
STRUCTURE NO. 060-0350 (EB)

SHEET 247 OF 292 SHEETS

F.A.I. RTE. SECTION COUNTY TOTAL SHEETS SHEET NO.
270 60B-1 MADISON 860 447
CONTRACT NO. 76J90
ILLINOIS FED. AID PROJECT

9/13/2021 1:51:48 PM

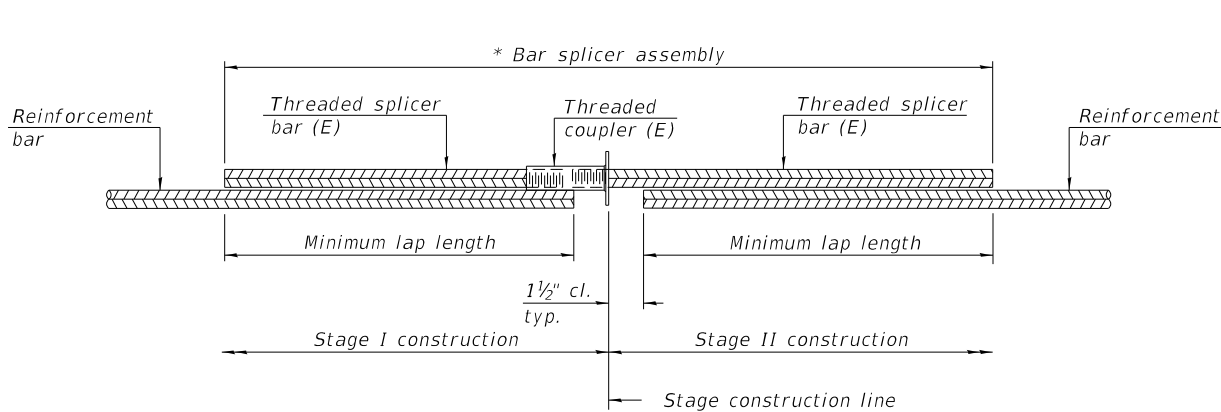


STANDARD BAR SPLICER ASSEMBLY PLAN
(All components shall be provided from one supplier)

Threaded splicer bar length = min. lap length + 1 1/2" + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

Location	Bar size	No. assemblies required	Minimum lap length

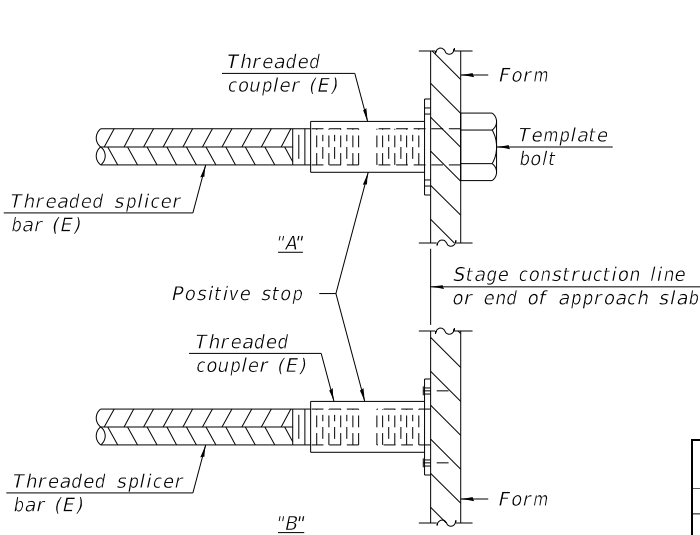


INSTALLATION AND SETTING METHODS

"A" : Set bar splicer assembly by means of a template bolt.
"B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms.
(E) : Indicates epoxy coating.

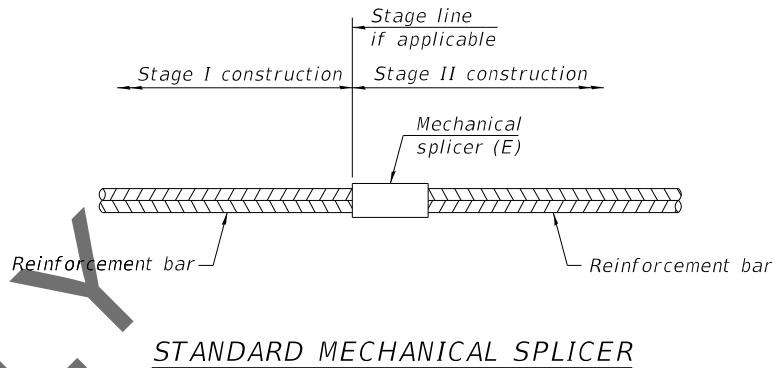

Location	Bar size	No. assemblies required
Pier 1	#9	72
Pier 1	#11	56
Pier 1	#14	198
Pier 2	#9	72
Pier 2	#11	56
Pier 2	#14	198
Pier 3	#9	72
Pier 3	#11	56
Pier 3	#14	198
Pier 4	#9	72
Pier 4	#11	56
Pier 4	#14	198
Pier 5	#9	72
Pier 5	#11	56
Pier 5	#14	198
Pier 6	#9	72
Pier 6	#14	198
Pier 7	#9	72
Pier 7	#14	198
Pier 8	#9	72
Pier 8	#14	198
Pier 9	#9	72
Pier 9	#14	198
Pier 10	#9	72
Pier 10	#14	198
Pier 11	#9	72
Pier 11	#14	198

Location	Bar size	No. assemblies required
Pier 12	#9	72
Pier 12	#14	198
Pier 13	#9	72
Pier 13	#14	198
Pier 14	#9	72
Pier 14	#14	198
Pier 15	#9	72
Pier 15	#14	198
Pier 16	#9	72
Pier 16	#14	198
Pier 17	#9	72
Pier 17	#14	198
Pier 18	#9	72
Pier 18	#14	264
Pier 19	#9	72
Pier 19	#14	264
Pier 20	#9	72
Pier 20	#14	264
Pier 21	#9	72
Pier 21	#14	264
Pier 22	#9	72
Pier 22	#14	264
Pier 23	#9	72
Pier 23	#14	264
Pier 24	#9	72
Pier 24	#14	264
Pier 25	#9	72
Pier 25	#14	264

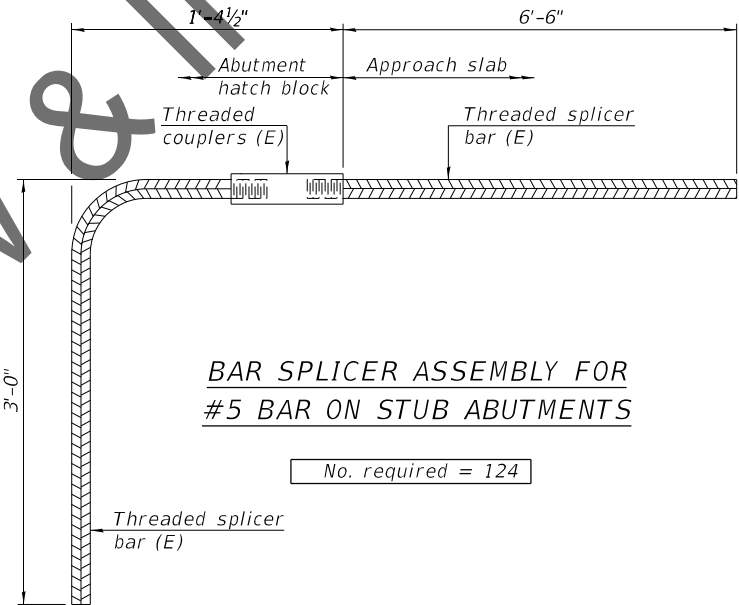

BAR SPLICER ASSEMBLY FOR
#5 BAR ON STUB ABUTMENTS

No. required = 124

Notes:
Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.
All reinforcement shall be lapped and tied to the splicer bars.
Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.
See approved list of bar splicer assemblies and mechanical splicers for alternatives.

Page 1 of 1

Date 09/20/18

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 **LOCATION** West Abutment, SEC. , TWP. Land Grant 00114, RNG.

COUNTY	St. Louis	DRILLING METHOD	HSA	HAMMER TYPE	Automatic
--------	-----------	-----------------	-----	-------------	-----------

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BORING LOGS – WEST ABUTMENT
STRUCTURE NO. 060-0350 (EB)**

SHEET 249 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	449
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\CS4PDF\9295\45087 567\060-0350-D876J90-cda-01aBOR.dgn

9/13/2021 7:42:31 PM



Page 1 of 2

Date 03/30/21

ROUTE	FAI 270	DESCRIPTION	I-270 over the Mississippi River	LOGGED BY	SCI
-------	---------	-------------	----------------------------------	-----------	-----

SECTION 60B-1 LOCATION Pier 3 SEC. TWP. Land Grant 00114, RNG.
Lat 38.7657626 Long -90.01789774

COUNTY	Madison	DRILLING METHOD	HSA, NQ Casing	HAMMER TYPE	Automatic
--------	---------	-----------------	----------------	-------------	-----------

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	402.9	ft
Station	806+89.23	E	L	C	O	Stream Bed Elev.		ft

BORING NO. <u>BB-08</u>	T	W		S	Groundwater Elev.:
Station <u>1783+46.58</u>	H	S	Qu	T	First Encounter <u> </u> ft
Offset <u>69.4 ft R (EB)</u>					Upon Completion <u> </u> ft
Ground Surface Elev. <u>410.4</u> ft	(ft)	(/6")	(tsf)	(%)	After <u> </u> Hrs. <u> </u> ft

River surface elevation at 410.4 (+/-) feet. Surface elevation at river bottom = 397.7 (+/-) feet.			
Sampling began 12.1 feet below water level.			

Silty Loam: Dark gray, wet, very soft, A-4. 397.7

Clay: Dark gray, very moist, soft, A-7. 398.3

Wood	392.8
------	-------

Weathered Limestone	391.5
Borehole continued with rock coring.	391.3

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Page 1 of 2

Date 03/30/21

ROUTE	FAI 270	DESCRIPTION	I-270 over the Mississippi River	LOGGED BY	SCI
-------	---------	-------------	----------------------------------	-----------	-----

SECTION 60B-1 LOCATION Pier 3, SEC. TWP. Land Grant 00114, RNG.
Lat 38.7657626 Long -90.01789774

COUNTY	Madison	CORING METHOD	Conventional	R		CORE	S	M
--------	---------	---------------	--------------	---	--	------	---	---

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE	NX		C	T	R	I
Station	806+89.23				Q	I	E	S

BORING NO.	BB-08	Top of Rock Elev.	391.5	ft	P	R	E	D	E	G	U
Station	1783+46.58	Begin Core Elev.	301.3	ft	T	E	R	-	T	H	R
Offset	69.4 ft R (EB)				H	R	Y				
Ground Surface Elev.	410.4				(ft)	(#)	(%)	(%)	(min/ft)	(tsf)	(%)

Limestone: Light gray to white, hard to very hard, very finely crystalline, medium to 391.3 thick bedding, fractured, slightly weathered, dense.	1	94	79	2.9		
Depth 20.1'. Dry Density: 160.2 pcf.					745.9	0.1

Depth 25.7'. Dry Density: 165.4 pcf.	783.4	0.1
--------------------------------------	-------	-----

Calcareous Sandstone. Gray to greenish gray, hard to very hard, very finely to finely crystalline, medium to thick bedded, slightly weathered, dense.	577.3	0.2
Depth 33.4', Dry Density: 151.6 pcf.		

Limestone: Light gray to white, hard to very hard, finely crystalline, medium to thick bedding, fractured, slightly weathered, dense.	57.50				
---	-------	--	--	--	--

Color pictures of the cores _____ Yes _____
 Cores will be stored for examination until _____ completion _____
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



Page 2 of 2

Date 03/30/21

ROUTE	FAI 270	DESCRIPTION	I-270 over the Mississippi River	LOGGED BY	SCI
--------------	---------	--------------------	----------------------------------	------------------	-----

SECTION	60B-1	LOCATION	Pier 3, SEC., TWP. Land Grant 00114, RNG.				
			Lat 38.7657626	Long -90.01789774			

COUNTY	Madison	CORING METHOD	Conventional	R	CORE	S	M
--------	---------	---------------	--------------	---	------	---	---

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE	Coll. Barrel NX	C O V	Q	T I M	R E N	I S T
Station	806+89.23							

BORING NO.	BB-08	Top of Rock Elev.	391.5	ft	P	R	E	D	E	G	U
Station	1783+46.58	Begin Core Elev.	391.3	ft	T	E	.			H	R
Offset	69.4 ft R (EB)				Y						E
Ground Surface Elev.	410.4	ft			(ft)	(#)	(%)	(%)	(min/ft)	(tsf)	(%)

Limestone: Light gray to white, hard to very hard, finely crystalline, medium to thick bedding, fractured, slightly weathered, dense. (<i>continued</i>)	3	95	81	2.7		
Medium to massive bedding (banded from 41.5 to 42.2 feet).	40					

[illegible]

	361.3					
Boring terminated at 49.07 feet.						

Color pictures of the cores Yes
 Cores will be stored for examination until completion
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BORING LOGS - PIER 3
STRUCTURE NO. 060-0350 (EB)

SHEET 250 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	450
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\C54PDF\929745087_5711060-0350-D876\90-cda-03aBOR.dgn
9/13/2021 8:27:46 PM



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 04/11/21

ROUTE FAI 270DESCRIPTION I-270 over the MississippiLOGGED BY SCI

SECTION 60B-1LOCATION Pier 4, SEC. TWP. Land Grant 00114, RNG. Lat 38.765505 Long -90.178189

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-10
Station 1785+71.61
Offset 40.9 ft R (EB)
Ground Surface Elev. 409.2 ft

DEPTH (ft)

DIAMETER (in)

LOGS (tsf)

MOISTURE (%)

Surface Water Elev. 379.6 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

DEPTH (ft)

DIAMETER (in)

LOGS (tsf)

MOISTURE (%)

River surface elevation at 409.2 (+/-) feet. Surface elevation at river bottom = 385.4 (+/-) feet. Sampling began 23.5 feet below water level.

389.2-20

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 04/11/21

ROUTE FAI 270DESCRIPTION I-270 over the MississippiLOGGED BY SCI

SECTION 60B-1LOCATION Pier 4, SEC. TWP. Land Grant 00114, RNG. Lat 38.765505 Long -90.178189

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-10
Station 1785+71.61
Offset 40.9 ft R (EB)
Ground Surface Elev. 409.2 ft

DEPTH (ft)

DIAMETER (in)

LOGS (tsf)

MOISTURE (%)

CORING BARREL TYPE & SIZE NQ
Core Diameter 1.86 in
Top of Rock Elev. 385.6 ft
Begin Core Elev. 385.6 ft

DEPTH (ft)

DIAMETER (in)

LOGS (tsf)

MOISTURE (%)

Limestone: Light gray, hard to very hard, very finely crystalline to aphanitic, thin to thick bedding, slightly weathered, dense. (continued)

29.1' Depth, Dry Density: 161.0 pcf.

Calcareous Sandstone: Gray to greenish-gray, very hard to hard, finely crystalline to aphanitic, thin to thick bedding, slightly weathered, dense, with clayey shale deposits.

31.7' Depth, Dry Density: 156.7 pcf.

Limestone: Light gray, hard to very hard, finely crystalline to aphanitic, thin to thick bedding, slightly weathered, dense.

34.5' Depth, Dry Density: 161.2 pcf.

38.9' Depth, Dry Density: 163.4 pcf.

365.6

Boring terminated at 43.6 feet.
Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 4
STRUCTURE NO. 060-0350 (EB)

SHEET 251 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	451
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: C:\C54PDF\929745087_569\060-0350-D876\9b-cda-04aBOR.dgn



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 10/28/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 5, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76537354 Long -90.17740575

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-12
Station 1788+08.41
Offset 36.9 ft R (EB)
Ground Surface Elev. 393.4 ft

DEPTHS

ft

(ft)

(/6")

(tsf)

(%)

Surface Water Elev. 393.4 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

River surface elevation at 393.4 (+/-) feet. Surface elevation at river bottom = 383.6 (+/-) feet. Sampling began 9.8 feet below water level.

Weathered Limestone

Borehole continued with rock coring.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 10/28/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 5, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76537354 Long -90.17740575

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-12
Station 1788+08.41
Offset 36.9 ft R (EB)
Ground Surface Elev. 393.4 ft

DEPTHS

ft

(#)

(%)

(%)

(min/ft)

(tsf)

(%)

CORING BARREL TYPE & SIZE Solid Barrel NQ
Core Diameter 1.86 in
Top of Rock Elev. 384.7 ft
Begin Core Elev. 383.6 ft

Limestone: Light gray, moderately hard, very finely crystalline, thin to medium bedding, slightly to moderately weathered, dense.
Sandy Limestone: Light gray, very hard, fine to coarse grained, banded to thinly bedded, fresh, interbedded with dark gray sandstone bands.
Depth 13.0', Dry Density: 162.4 pcf.
Depth 18.0', Dry Density: 156.9 pcf.
Limestone: Light gray, moderately hard, very finely crystalline, thin to medium bedding, slightly to moderately weathered, dense.
Depth 20.6', Dry Density: 160.6 pcf.
Depth 25.1', Dry Density: 159.9 pcf.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 10/28/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 5, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76537354 Long -90.17740575

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-12
Station 1788+08.41
Offset 36.9 ft R (EB)
Ground Surface Elev. 393.4 ft

DEPTHS

ft

(#)

(%)

(%)

(min/ft)

(tsf)

(%)

CORING BARREL TYPE & SIZE Solid Barrel NQ
Core Diameter 1.86 in
Top of Rock Elev. 384.7 ft
Begin Core Elev. 383.6 ft

Limestone: Light gray, moderately hard, very finely crystalline, thin to medium bedding, slightly to moderately weathered, dense. (continued)
Depth 30.0', Dry Density: 162.6 pcf.
Depth 34.8', Dry Density: 159.9 pcf.
Boring terminated at 39.8 feet.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 5
STRUCTURE NO. 060–0350 (EB)

SHEET 252 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	452
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		



Page 1 of 2

Date 10/27/20

ROUTE	FAI 270	DESCRIPTION	I-270 over the Mississippi River	LOGGED BY	SCI
-------	---------	-------------	----------------------------------	-----------	-----

SECTION 60B-1 LOCATION Pier 6, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76517488 Long -90.17661147

COUNTY Madison DRILLING METHOD HSA, NQ Casing HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	394.2 ft
Station	806+89.23	E	L	C	O	Stream Bed Elev.	ft

BORING NO. <u>BB-14</u>	T	W	S	Groundwater Elev.:
Station <u>1790+46.17</u>	H	S	Qu	First Encounter _____ ft
Offset <u>35.8 ft R (EB)</u>				Upon Completion _____ ft
Ground Surface Elev. <u>394.2</u> ft	(ft)	(ft)	(tsf)	After _____ Hrs. _____ ft

River surface elevation at 394.2 (+/-) feet. Surface elevation at river bottom = 387.6 (+/-) feet.			
Sampling began 6.6 feet below water level.			

Sand: Brown, fine to coarse grained, very loose, A-3.	2 1 1	NC	--
---	-------------	----	----

	383.7			
Borehole continued with rock coring.				

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Page 1 of 2

Date 10/27/20

ROUTE	FAI 270	DESCRIPTION	I-270 over the Mississippi River	LOGGED BY	SCI
-------	---------	-------------	----------------------------------	-----------	-----

SECTION	60B-1	LOCATION	Pier 6, SEC., TWP. Land Grant 00114, RNG.
		Lat	38.76517488 Long -90.17661147

COUNTY Madison CORING METHOD Conventional

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE	Solid Barrel		C	.	T	R	I
Station	806+89.23		NQ		D	Q	I	E	S
					E		M	N	T
					C				
					O				
					V				

LOGGING NO. <u>BB-14</u>	Top of Rock Elev. <u>383.7</u> ft	P	R	E	D	E	G	C
Station <u>1/90+46.17</u>	Begin Core Elev. <u>383.7</u> ft	T	H	E			H	E
Offset <u>35.8 ft R (EB)</u>		(ft)	(#)	(%)	(%)	(min/ft)	(tsf)	(%)
Ground Surface Elev. <u>394.2</u> ft								

Limestone: Light gray, very finely crystalline, banded to thinly bedded, fresh, dense.	383.7	1	91	83	4.5
---	-------	---	----	----	-----

Depth 12.5', Dry Density: 163.8 pcf.

Sandy Limestone: Light gray, very hard, fine to coarse grained, banded to thinly bedded, fresh, interbedded with dark gray sandstone bands. Depth 18.6'. Dry Density: 163.7 pcf.	621.1	0.1
---	-------	-----

limestone: Light gray, very finely crystalline, thin to thick bedding, fresh, dense.	2	95	64	6.2		
--	---	----	----	-----	--	--

Depth 24.6', Dry Density: 163.0 pcf	-25				581.4	0.2
-------------------------------------	-----	--	--	--	-------	-----

Depth 28.6'; Dry Density: 165.5 pcf.					650.1	0.2
--------------------------------------	--	--	--	--	-------	-----

Color pictures of the cores Yes
 Cores will be stored for examination until completion
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



Page 2 of 2

Date 10/27/20

ROUTE	FAI 270	DESCRIPTION	I-270 over the Mississippi River	LOGGED BY	SCI
--------------	---------	--------------------	----------------------------------	------------------	-----

SECTION 60B-1 LOCATION Pier 6, SEC. , TWP. Land Grant 00114, RNG.
Lat 38.76517488 Long -90.17661147

COUNTY Madison CORING METHOD Conventional

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE	Consolidator NQ	D E F	C O V	C O V	Q	T I M	R E N	I S T
Station	806+89.23									

BORING NO.	BB-14	Top of Rock Elev.	383.7	ft	P T H (ft)	R E T H (#)	E R Y (%)	D . (%)	E (min/ft)	G T H (tsf)	U R E (%)
Station	1790+46.17	Begin Core Elev.	383.7	ft							
Offset	35.8 ft R (EB)										
Ground Surface Elev.	394.2	ft									

Limestone: Light gray, very finely crystalline, thin to thick bedding, fresh, dense. (continued)	3	100	66	6.7		
---	---	-----	----	-----	--	--

Depth 34.6', Dry Density: 165.3 pcf.	-35				837.9	0.2
--------------------------------------	-----	--	--	--	-------	-----

Depth 39.6', Dry Density: 165.7 pcf.	-40				617.3	0.2
--------------------------------------	-----	--	--	--	-------	-----

Boring terminated at 40.5 feet.						
---------------------------------	--	--	--	--	--	--

Color pictures of the cores Yes
 Cores will be stored for examination until completion
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 6
STRUCTURE NO. 060-0350 (EB)

SHEET 253 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	453
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\ICS4PDF\929745087 570\060-0350-D876190-cda-05aBOR.dgn

9/13/2021 8:27:42 PM

MODEL: Default
FILE NAME: C:\C54PDF\929745087_572\060-0350-D876\9b-cda-06aBOR.dgn



Illinois Department
of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 04/10/21

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 7, SEC., TWP. Land Grant 00114, RNG.
Lat 38.765035 Long -90.175830

COUNTY Madison DRILLING METHOD HSA, NQ Casing HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-18
Station 1792+82.43
Offset 35.8 ft R (EB)
Ground Surface Elev. 407.8 ft

DEPTH (ft) (ft) (6") (tsf) (%)

1
2
1

NC

--

Surface Water Elev. 399.1 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

DEPTH (ft) (ft) (6") (tsf) (%)

2
3
3

NC

--

Sand: Brown, fine-grained, very loose, A-3. (continued)
386.3
Clay Loam: Dark gray, soft, A-7.
385.8
Sand: Gray, fine-grained, loose, A-3.
380.9

Borehole continued with rock coring.
50/1" NC --

Sand: Brown, fine-grained, very loose, A-3.
400.0

1
2
1

NC

--

3
4
4

NC

--

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department
of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 04/10/21

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 7, SEC., TWP. Land Grant 00114, RNG.
Lat 38.765035 Long -90.175830

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-18
Station 1792+82.43
Offset 35.8 ft R (EB)
Ground Surface Elev. 407.8 ft

CORING BARREL TYPE & SIZE Solid Barrel NQ

Core Diameter 1.86 in
Top of Rock Elev. 380.9 ft
Begin Core Elev. 380.7 ft

DEPTH (ft) (ft) (6") (tsf) (%)

1
2

96
98

69
70

4.1
5.4

834.7
827.5
585.5
370.4

0.1
0.1
0.3
0.5

Limestone: Light gray, hard to very hard, very finely crystalline to aphanitic, banded to medium bedding, slightly weathered, dense, with clayey shale deposits. (continued)
Depth 28.5', Dry Density: 165.5 pcf.

Depth 34.4', Dry Density: 165.4 pcf.

Calcareous Sandstone: Light gray to greenish-gray, hard to very hard, finely crystalline, medium bedding, slightly weathered, dense, calcareous, dense, with clayey shale deposits.
Depth 40.3', Dry Density: 165.9 pcf.

Depth 43.7', Dry Density: 161.2 pcf.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



Illinois Department
of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 04/10/21

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 7, SEC., TWP. Land Grant 00114, RNG.
Lat 38.765035 Long -90.175830

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-18
Station 1792+82.43
Offset 35.8 ft R (EB)
Ground Surface Elev. 407.8 ft

CORING BARREL TYPE & SIZE Solid Barrel NQ

Core Diameter 1.86 in
Top of Rock Elev. 380.9 ft
Begin Core Elev. 380.7 ft

DEPTH (ft) (ft) (6") (tsf) (%)

3

98

80

4.8

503.4

0.2

Limestone: Gray, hard to very hard, very finely crystalline, banded to massive bedding, slightly weathered, dense. (continued)
Depth 47.3', Dry Density: 162.8 pcf.

Depth 54.8', Dry Density: 164.8 pcf.

Boring terminated at 57.1 feet,

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

MODEL: Default
FILE NAME: C:\C54PDF\929745087_573\060-0350-D876\9b-cda-08aBOR.dgn



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 1

Date 11/27/18

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 9, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76466 Long -90.174188

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-16A
Station 1797+61.34
Offset 1.0 ft R (EB)
Ground Surface Elev. 400.2 ft

D
E
P
T
H

ft

B
L
O
W
S

(ft)

U
C
S

(/6")

M
O
I
S
T

(tsf)

Qu

(%)

Surface Water Elev. 400.2 ft

Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

D
E
P
T
H

ft

B
L
O
W
S

(/6")

U
C
S

(tsf)

Qu

(%)

River surface elevation at 400.2 (+/-) feet. Surface elevation at river bottom = 380.1 (+/-) feet. Sampling began 20.1 feet below water level.

380.1

5

4

4

NC

--

366.6

100

NC

--

Borehole continued with rock coring.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 1

Date 11/27/18

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 9, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76466 Long -90.174188

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-16A
Station 1797+61.34
Offset 1.0 ft R (EB)
Ground Surface Elev. 400.2 ft

D
E
P
T
H

ft

C
O
R
E

(#)

R
E
C
O
V
E
R
Y

(%)

R
Q
D
-

(%)

C
O
R
E
T
I
M
E

(min/ft)

S
T
R
E
N
G
T
H

(tsf)

M
O
I
S
T
U
R
E

(%)

CORING BARREL TYPE & SIZE NQ

Core Diameter 1.86 in
Top of Rock Elev. 366.6 ft
Begin Core Elev. 366.6 ft

Limestone: Gray, moderately hard to hard, banded to thinly bedded, slightly weathered, dense.
Depth 34.2'. Dry Density: 165.7 pcf.

4" Closed vertical fracture.

Boring terminated at 37.3 feet.

366.6

1

93

45

6.8

771.3

0.2

362.9

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 1

Date 11/28/18

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 9, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76462 Long -90.17426

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-16B
Station 1797+61.34
Offset 1.0 ft R (EB)
Ground Surface Elev. 400.2 ft

D
E
P
T
H

ft

B
L
O
W
S

(/6")

U
C
S

(tsf)

M
O
I
S
T

(%)

Qu

(%)

Surface Water Elev. 400.2 ft

Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

D
E
P
T
H

ft

B
L
O
W
S

(/6")

U
C
S

(tsf)

Qu

(%)

River surface elevation at 400.2 (+/-) feet. Surface elevation at river bottom = 378.2 (+/-) feet. Sampling began 22.0 feet below water level.

378.2

367.4

Sand: Gray, fine to coarse grained, Sampling not performed. See BB-16A. A-2.

Borehole continued with rock coring.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 9
STRUCTURE NO. 060–0350 (EB)

SHEET 256 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	456
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

9/13/2021 8:28:15 PM

MODEL: Default
FILE NAME: C:\C54PDF\929745087_574\060-0350-D876\90-cda-09aBOR.dgn

 CDI DESIGN, INC.	USER NAME =	DESIGNED -	REVISED -
		CHECKED -	REVISED -
	PLOT SCALE =	DRAWN - JGS	REVISED -
	PLOT DATE =	CHECKED -	REVISED -

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	457
		CONTRACT NO. 76J90		
		ILLINOIS FED. AID PROJECT		



Illinois Department of Transportation

Division of Highways
sci engineering inc

Page 1 of 1

ROCK CORE LOG

Date 11/28/18

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 9, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76462 Long -90.17426

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)CORING BARREL TYPE & SIZE Solid Barrel NQ
Station 806+89.23Core Diameter 1.86 in
BORING NO. BB-16BTop of Rock Elev. 367.4 ft
Station 1797+61.34Begin Core Elev. 367.4 ft
Offset 1.0 ft R (EB)
Ground Surface Elev. 400.2 ft

DEPTH (ft)	COVER (#)	RECOVERY (%)	R.Q.D. (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
1	90	52	5.4			
35					871.0	0.2
361.2						

Limestone: Gray, moderately hard, very finely crystalline, banded to thinly bedded, 367.4 slightly weathered, dense.

Tan.

Depth 36.0', Dry Density: 164.3 pcf.

Thinly to medium bedded.

Boring terminated at 39.0 feet.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

Page 1 of 2

SOIL BORING LOG

Date 11/29/18

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 9, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76463 Long -90.17427

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)CORING BARREL TYPE & SIZE Solid Barrel NQ
Station 806+89.23Core Diameter 1.86 in
BORING NO. BB-16CTop of Rock Elev. 367.4 ft
Station 1797+61.34Begin Core Elev. 367.4 ft
Offset 1.0 ft R (EB)
Ground Surface Elev. 400.2 ft

DEPTH (ft)	COVER (#)	RECOVERY (%)	R.Q.D. (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
1	90	52	5.4			
35					871.0	0.2
361.2						

Limestone: Gray, moderately hard, very finely crystalline, banded to thinly bedded, 367.4 slightly weathered, dense.

Tan.

Depth 36.0', Dry Density: 164.3 pcf.

Thinly to medium bedded.

Boring terminated at 39.0 feet.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

Page 1 of 2

ROCK CORE LOG

Date 11/29/18

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 16, SEC., TWP. Land Grant 00114, RNG.
Lat 38.76463 Long -90.17427

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)CORING BARREL TYPE & SIZE Solid Barrel NQ
Station 806+89.23Core Diameter 1.86 in
BORING NO. BB-16CTop of Rock Elev. 367.4 ft
Station 1797+61.34Begin Core Elev. 367.4 ft
Offset 1.0 ft R (EB)
Ground Surface Elev. 400.2 ft

DEPTH (ft)	COVER (#)	RECOVERY (%)	R.Q.D. (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
1	90	52	5.4			
35					871.0	0.2
361.2						

Limestone: Gray, moderately hard, very finely crystalline, banded to thinly bedded, 367.4 slightly weathered, dense.

Tan.

Depth 36.0', Dry Density: 164.3 pcf.

Thinly to medium bedded.

Boring terminated at 39.0 feet.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

MODEL: Default
FILE NAME: C:\CS4PDF\929745087_578\060-0350-D876J90-cda-10aBOR.dgn
9/13/2021 8:30:03 PM



Illinois Department of Transportation

Division of Highways

sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 11/29/18

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 16, SEC. TWP. Land Grant 00114, RNG. Lat 38.76483 Long -90.17427

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)CORING BARREL TYPE & SIZE Solid Barrel NQ

Station 806+89.23

BORING NO. BB-16C

Station 1797+61.34

Offset 1.0 ft R (EB)

Ground Surface Elev. 400.2 ft

Core Diameter 1.86 in

Top of Rock Elev. 373.6 ft

Begin Core Elev. 372.9 ft

DEPTH (ft)	CORE (#)	RECOVER (%)	ROQ (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
4	98	84	5.6			
Sandy Limestone: Light gray, very hard, fine to coarse grained, banded to thinly bedded, fresh, slightly fractured, oolitic, interbedded with dark gray sandstone bands. (continued)						
-50						
Depth 49.9', Dry Density: 166.0 pcf.	349.6				850.8	0.2
Limestone: Light gray and white, very hard, finely crystalline, banded, slightly weathered, slightly fractured, some interbedded fine grained sandstone beds.						
-55						
Thickly bedded, no sandstone interbeds, trace fine sand.						
342.9						
Boring terminated at 56.6 feet.						
-60						
-65						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938) BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 9
STRUCTURE NO. 060–0350 (EB)

SHEET 258 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	458
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

Page 1 of 1

Date 10/14/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 11, SEC. , TWP. Land Grant 00114, RNG.
Lat 38.764277 Long -90.172991

COUNTY Madison DRILLING METHOD HSA, NQ Casing HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D	B	L	U	M		Surface Water Elev.	388.6	D	B	L	U	M	
Station	806+89.23	E	P	O	C	O		Stream Bed Elev.		E	P	O	C	O	
		T	W	S	Qu	T				T	W	S	Qu	T	
BORING NO.	BB-24							Groundwater Elev.:							
Station	1801+26.60							First Encounter							
Offset	26.5 ft R (EB)							Upon Completion							
Ground Surface Elev.	388.6	(ft)	(/6")	(tsf)	(%)			After	Hrs.	(ft)	(/6")	(tsf)	(%)		

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 1 of 1

Date 10/14/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION	60B-1	LOCATION	Pier 11, SEC. , TWP. Land Grant 00114, RNG.
		Lat	38.764277 Long -90.172991

COUNTY	Madison	CORING METHOD	Conventional	R	D	CORE	S	M
--------	---------	---------------	--------------	---	---	------	---	---

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE	NQ		<table border="1"> <tr> <td>DEPTH</td> <td>CORE PRE</td> <td>CORE Y</td> <td>Q</td> <td>T</td> <td>R</td> <td>I</td> </tr> <tr> <td>(ft)</td> <td>(#)</td> <td>(%)</td> <td>(%)</td> <td>(min/ft)</td> <td>(tsf)</td> <td>(%)</td> </tr> </table>	DEPTH	CORE PRE	CORE Y	Q	T	R	I	(ft)	(#)	(%)	(%)	(min/ft)	(tsf)	(%)
DEPTH	CORE PRE	CORE Y	Q	T		R	I												
(ft)	(#)	(%)	(%)	(min/ft)		(tsf)	(%)												
Station	806+89.23	Core Diameter	1.86	in															
BORING NO.	BB-24	Top of Rock Elev.	364.7	ft															
Station	1801+26.60	Begin Core Elev.	364.2	ft															
Offset	26.5 ft R (EB)																		
Ground Surface Elev.	388.6	ft																	

Depth	Stratigraphic Unit	Thickness (ft)	Dry Density (pcf)	Moisture (%)	Specific Gravity	Unit Weight (pcf)
0.0 - 29.0	Limestone: Light gray, hard, very finely crystalline, thinly bedded, slightly to moderately weathered, dense.	29.0	166.1	25.0	2.70	799.9
29.0 - 32.6	Sandy Limestone: Gray, hard, fine-grained, thinly to medium bedded, slightly weathered, dense to pitted.	3.6	163.7	25.0	2.70	799.9
32.6 - 35.2	Shale Clay: Greenish-gray	2.6	163.7	25.0	2.70	799.9
35.2 - 35.9	Argillaceous Limestone: Light gray, hard, aphanitic, thinly bedded, slightly weathered.	0.7	163.7	25.0	2.70	799.9
35.9 - 36.0	Moderately hard to hard, medium bedding, with shale partings	0.1	163.7	25.0	2.70	799.9
36.0 - 38.0	Limestone: Gray, hard, finely crystalline, medium bedded, slightly weathered, dense.	2.0	165.3	25.0	2.70	800.0
38.0 - 43.6	Limestone: Gray, hard, finely crystalline, medium bedded, slightly weathered, dense.	5.6	164.1	25.0	2.70	804.9

Color pictures of the cores Yes
 Cores will be stored for examination until completion
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)

Page 2 of 1

Date 10/14/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION	60B-1	LOCATION	Pier 11, SEC. , TWP. Land Grant 00114, RNG.
		Lat	38.764277 Long -90.172991

COUNTY	<u>Madison</u>	CORING METHOD	<u>Conventional</u>	R		CORE	S	M
--------	----------------	---------------	---------------------	---	--	------	---	---

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE		CORING METHOD		CORING NO.	
Station	806+89.23						
BORING NO.	BB-24	Core Diameter		1.86	in		
Station	1801+26.60	Top of Rock Elev.		364.7	ft		
Offset	26.5 ft R (EB)	Begin Core Elev.		364.2	ft		
Ground Surface Elev.	388.6	ft					
			DEPTH	CORRECTION	CORRECTION	TIME	REMARKS
			(ft)	(#)	(%)	(%)	(min/ft)
							(tsf)
							(%)

Limestone: gray, hard, very finely crystalline, medium to thickly bedded, slightly weathered. Depth 45.1 feet. Dry Density: 161.9 pcf.					
	3	100	90	2.3	744.3 0.2
Depth 52.6 feet. Dry Density: 166.1 pcf.					
					773.8 0.1
Boring terminated at 54.4 feet.	334.2				

Color pictures of the cores Yes
 Cores will be stored for examination until completion
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BORING LOGS - PIER 11
STRUCTURE NO. 060-0350 (EB)

SHEET 260 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	460
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\ICS4PDF\9297\45087 577\060-0350-D876J90-cda-12aBOR.dgn

9/13/2021 8:28:05 PM

Page 1 of 2

Date 10/21/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 13, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763906 Long -90.171306

COUNTY Madison DRILLING METHOD HSA, NQ Casing HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D	B	L	U	M	O	Surface Water Elev.	390.3	D	B	L	U	M	O
Station	806+89.23	E	P	O	C	I	S	Stream Bed Elev.	ft	E	P	O	C	I	S
BORING NO.	BB-28	H	W	S	Qu	T		Groundwater Elev.:		H	W	S	Qu	T	
Station	1806+25.33							First Encounter	ft						
Offset	6.9 ft R (EB)							Upon Completion	ft						
Ground Surface Elev.	390.3	(ft)	(ft)	(6")	(tsf)	(%)		After	Hrs.	(ft)	(6")	(tsf)	(%)		

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 2 of 2

Date 10/21/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 13, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763906 Long -90.171306

COUNTY Madison DRILLING METHOD HSA, NQ Casing HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D E P T H	B L O W S	U C S	M O I S T	Surface Water Elev.	390.3	ft	
Station	806+89.23					Stream Bed Elev.		ft	
BORING NO.	BB-28	11	(ft)	(6")	(tsf)	(%)	Groundwater Elev.:		
Station	1806+25.33						First Encounter		ft
Offset	6.9 ft R (EB)						Upon Completion		ft
Ground Surface Elev.	390.3						After	Hrs.	ft

Sand: Gray, fine to coarse
grained, very loose to loose,
A-3. (continued)

	2	NC	--
	5		
Weathered Limestone.	347.3		
Borehole continued with rock coring.	346.7	50/5"	
	-45		
	-50		
	-55		
	-60		

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 1 of 2Date 10/21/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 13, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763906 Long -90.171306

COUNTY	<u>Madison</u>	CORING METHOD	<u>Conventional</u>	R		CORE	S	M
--------	----------------	---------------	---------------------	---	--	------	---	---

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE		NO		D E P T H	C O R E	C O V E R Y	Q U A L I T Y	T I M E	R E N G T H	I S T U R E
Station	806+89.23	Core Diameter	1.86	in								
BORING NO.	BB-28	Top of Rock Elev.	347.3	ft								
Station	1806+25.33	Begin Core Elev.	346.7	ft								
Offset	6.9 ft R (EB)					(ft)	(#)	(%)	(%)	(min/ft)	(tsf)	(%)
Ground Surface Elev.	390.3	ft										

346.7	1	99	88	3.2		
Limestone: Light gray, hard, very finely crystalline, medium to thickly bedded, slightly weathered, dense. -45 Depth 46.1 feet. Dry Density: 166.0 pcf.					1097.1	0.1
-50 Depth 50.5 feet. Dry Density: 166.2 pcf.					1404.0	0.1
Aphanitic, trace shaley limestone. -55 Depth 56.0 feet. Dry Density: 165.5 pcf.	2	99	94	3.2	1255.4	0.2
-60 Depth 61.3 feet. Dry Density: 166.9 pcf.					819.3	0.1
326.7						

Color pictures of the cores _____ Yes _____
 Cores will be stored for examination until _____ completion _____
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BORING LOGS – PIER 13
STRUCTURE NO. 060-0350 (EB)

SHEET 262 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	462
		CONTRACT NO. 76190		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\CS4PDF\9297\45087_582\060-0350-D876J90-cda-14aBOR.dgn

9/13/2021 8:29:00 PM

MODEL: Default
FILE NAME: C:\C54PDF\929745087_580\060-0350-D876\90-cda-15aBOR.dgn

USER NAME	=	DESIGNED	-	REVISED	-
		CHECKED	-	REVISED	-
PLOT SCALE	=	DRAWN	- JGS	REVISED	-
PLOT DATE	=	CHECKED	-	REVISED	-

BORING LOGS - PIER 13	
STRUCTURE NO. 060-0350 (EB)	
SHEET 263	OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	463
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				



Illinois Department
of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 13, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763906 Long -90.171306

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE Solid Barrel NQ
Core Diameter 1.86 in
Top of Rock Elev. 347.3 ft
Begin Core Elev. 346.7 ft

BORING NO. BB-28
Station 1806+25.33
Offset 6.9 ft R (EB)
Ground Surface Elev. 390.3 ft

DEPTH (ft)	CORE (#)	RECOVER (%)	RECOVERED (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
3	100	97		3.2		
65					1012.5	0.1
71					1041.7	0.1
73.6						
75						
80						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

90% FOR
REVIEW & INSPECTION ONLY

MODEL: Default
FILE NAME: C:\C54PDF\929745087_5811060-0350-D876\9b-cda-16aBOR.dgn
9/13/2021 8:29:22 PM



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 10/22/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 14, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763645 Long -90.170586

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-30
Station 1808+52.52
Offset 27.6 ft R (EB)
Ground Surface Elev. 389.9 ft

DEPTH (ft)

DIAMETER (in)

BLUES QU

MOISTURE (%)

Surface Water Elev. 389.9 ft

Stream Bed Elev.

Groundwater Elev.:
First Encounter
Upon Completion
After Hrs.

DEPTH (ft)

DIAMETER (in)

BLUES QU

MOISTURE (%)

River surface elevation at 389.9 (+/-) feet. Surface elevation at river bottom = 365.0 (+/-) feet. Sampling began 24.9 feet below water level.

389.9

-20

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 10/22/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 14, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763645 Long -90.170586

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-30
Station 1808+52.52
Offset 27.6 ft R (EB)
Ground Surface Elev. 389.9 ft

DEPTH (ft)

DIAMETER (in)

BLUES QU

MOISTURE (%)

Surface Water Elev. 389.9 ft

Stream Bed Elev.

Groundwater Elev.:
First Encounter
Upon Completion
After Hrs.

DEPTH (ft)

DIAMETER (in)

BLUES QU

MOISTURE (%)

Sand: fine to coarse grained, medium dense, A-1. (continued)

389.9

-20

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 10/22/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 14, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763645 Long -90.170586

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-30
Station 1808+52.52
Offset 27.6 ft R (EB)
Ground Surface Elev. 389.9 ft

DEPTH (ft)

DIAMETER (in)

BLUES QU

MOISTURE (%)

Surface Water Elev. 389.9 ft

Stream Bed Elev.

Groundwater Elev.:
First Encounter
Upon Completion
After Hrs.

DEPTH (ft)

DIAMETER (in)

BLUES QU

MOISTURE (%)

Limestone: Light gray, moderately hard to hard, very finely crystalline, medium bedding, slightly weathered, dense.

342.4

-50

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 14
STRUCTURE NO. 060–0350 (EB)

SHEET 264 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	464
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\C54PDF\925745087_585\060-0350-D876\90-cda-1\BOR.dgn

USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	465
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 10/22/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 14, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763645 Long -90.170586

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE
Solid Barrel NQ
Core Diameter 1.86 in
Top of Rock Elev. 342.7 ft
Begin Core Elev. 342.4 ft

BORING NO. BB-30
Station 1808+52.52
Offset 27.6 ft R (EB)
Ground Surface Elev. 389.9 ft

DEPTH
(ft)

CO
RE
Y
(#)

RE
CO
V
E
R
Y
(%)

R
Q
D
(%)

CORE
T
I
M
E
(min/ft)

S
T
R
E
N
G
T
H
(tsf)

M
O
I
S
T
U
R
E
(%)

Argillaceous Limestone: Light gray, hard, very finely crystalline, thickly bedded, dense, trace stylolites.
Depth 67.7 feet. Dry Density: 166.8 pcf.

-70

Moderately hard.
With shale partings.

Hard.

Depth 74.1 feet. Dry Density: 167.3 pcf.

-75

312.4

Boring terminated at 77.5 feet.

-80

-85

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

MODEL: Default
FILE NAME: C:\C54PDF\929745087_583\060-0350-D876\90-cda+1aBOR.dgn
9/13/2021 8:29:48 PM



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCIDate 11/05/20

SECTION 60B-1LOCATION Pier 15, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.76347218 Long -90.16979886

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-34
Station 1810+85.36
Offset 26.6 ft R (EB)
Ground Surface Elev. 391.3 ft

DEPTH (ft)

DIAMETER (in)

UNIT WEIGHT (pcf)

MOISTURE (%)

UCS (tsf)

Failure Mode

Surface Water Elev. 391.3 ft

Stream Bed Elev.

Groundwater Elev.:
First Encounter
Upon Completion
After Hrs.

River surface elevation at 391.3 (+/-) feet. Surface elevation at river bottom = 369.2 (+/-) feet. Sampling began 22.1 feet below water level.

369.2

364.1

340.7

320.6

26

22

18

14

10

6

2

-2

-6

-10

-14

-18

-22

-26

-30

-34

-38

-42

-46

-50

-54

-58

-62

-66

-70

-74

-78

-82

-86

-90

-94

-98

-102

-106

-110

-114

-118

-122

-126

-130

-134

-138

-142

-146

-150

-154

-158

-162

-166

-170

-174

-178

-182

-186

-190

-194

-198

-202

-206

-210

-214

-218

-222

-226

-230

-234

-238

-242

-246

-250

-254

-258

-262

-266

-270

-274

-278

-282

-286

-290

-294

-298

-302

-306

-310

-314

-318

-322

-326

-330

-334

-338

-342

-346

-350

-354

-358

-362

-366

-370

-374

-378

-382

-386

-390

-394

-398

-402

-406

-410

-414

-418

-422

-426

-430

-434

-438

-442

-446

-450

-454

-458

-462

-466

-470

-474

-478

-482

-486

-490

-494

-498

-502

-506

-510

-514

-518

-522

-526

-530

-534

-538

-542

-546

-550

-554

-558

-562

-566

-570

-574

-578

-582

-586

-590

-594

-598

-602

-606

-610

-614

-618

-622

-626

-630

-634

-638

-642

-646

-650

-654

-658

-662

-666

-670

-674

-678

-682

-686

-690

-694

-698

-702

-706

-710

-714

-718

-722

-726

-730

-734

-738

-742

-746

-750

-754

-758

-762

-766

-770

-774

-778

-782

-786

-790

-794

-798

-802

-806

-810

-814

-818

-822

-826

-830

-834

-838

-842

-846

-850

-854

-858

-862

-866

-870

-874

-878

-882

-886

-890

-894

-898

-902

-906

-910

-914

-918

-922

-926

-930

-934

-938

-942

-946

-950

-954

-958

-962

-966

-970

-974

-978

-982

-986

-990

-994

-998

-1002

-1006

-1010

-1014

-1018

-1022

-1026

-1030

-1034

-1038

-1042

-1046

-1050

-1054

-1058

-1062

-1066

-1070

-1074

-1078

-1082

-1086

-1090

-1094

-1098

-1102

-1106

-1110

-1114

-1118

-1122

-1126

-1130

-1134

-1138

-1142

-1146

-1150

-1154

-1158

-1162

-1166

-1170

-1174

-1178

-1182

-1186

-1190

-1194

-1198

-1202

-1206

-1210

-1214

-1218

-1222

-1226

-1230

-1234

-1238

-1242

-1246

-1250

-1254

-1258

-1262

-1266

-1270

-1274

-1278

-1282

-1286

-1290

-1294

-1298

-1302

-1306

-1310

-1314

-1318

-1322

-1326

-1330

-1334

-1338

-1342

-1346

-1350

-1354

-1358

-1362

-1366

-1370

-1374

-1378

-1382

-1386

-1390

-1394

-1398

-1402

-1406

-1410

-1414

-1418

-1422

-1426

-1430

-1434

-1438

-1442

-1446

-1450

-1454

-1458

-1462

-1466

-1470

-1474

-1478

-1482

-1486

-1490

-1494

-1498

-1502

-1506

-1510

-1514

-1518

-1522

-1526

-1530

-1534

-1538

-1542

-1546

-1550

-1554

-1558

-1562

-1566

-1570

-1574

-1578

-1582

-1586

-1590

-1594

-1598

-1602

-1606

-1610

-1614

-1618

-1622

-1626

-1630

-1634

-1638

-1642

-1646

-1650

-1654

-1658

-1662

-1666

-1670

-1674

-1678

-1682

-1686

-1690

-1694

-1698

-1702

-1706

-1710

-1714

-1718

-1722

-1726

-1730

-1734

-1738

-1742

-1746

-1750

-1754

-1758

-1762

-1766

-1770

-1774

-1778

-1782

-1786

-1790

-1794

-1798

-1802

-1806

-1810

-1814

-1818

-1822

-1826

-1830

-1834

-1838

-1842

-1846

-1850

-1854

-1858

-1862

-1866

-1870

-1874

-1878

-1882

-1886

-1890

-1894

-1898

-1902

-1906

-1910

-1914

-1918

-1922

-1926

-1930

-1934

-1938

-1942

-1946

-1950

-1954

-1958

-1962

-1966

-1970

-1974

-1978

-1982

-1986

-1990

-1994

-1998

-2002

-2006

-2010

-2014

-2018

-2022

-2026

-2030

-2034

-2038

-2042

-2046

-2050

-2054

-2058

-2062

-2066

-2070

-2074

-2078

-2082

-2086

-2090

-2094

-2098

-2102

-2106

-2110

-2114

-2118

-2122

-2126

-2130

-2134

-2138

-2142

-2146

-2150

-2154

-2158

-2162

-2166

-2170

-2174

-2178

-2182

-2186

-2190

-2194

-2198

-2202

-2206

-2210

-2214

-2218

-2222

-2226

-2230

-2234

-2238

-2242

-2246

-2250

-2254

-2258

-2262

-2266

-2270

-2274

-2278

-2282

-2286

-2290

-2294

-2298

-2302

-2306

-2310

-2314

-2318

-2322

-2326

-2330

-2334

-2338

-2342

-2346

-2350

-2354

-2358

-2362

-2366

-2370

-2374

-2378

-2382

-2386

-2390

-2394

-2398

-2402

-2406

-2410

-2414

-2418

-2422

-2426

-2430

-2434

-2438

-2442

-2446

-2450

-2454

-2458

-2462

-2466

-2470

-2474

-2478

-2482

-2486

-2490

-2494

-2498

-2502

-2506

-2510

-2514

-2518

-2522

-2526

-2530

-2534

-2538

-2542

-2546

-2550

-2554

-2558

-2562

-2566

-2570

-2574

-2578

-2582

-2586

-2590

-2594

-2598

-2602

-2606

-2610

-2614

-2618

-2622

-2626

-2630

-2634

-2638

-2642

-2646

-2650

-2654

-2658

-2662

-2666

-2670

-2674

-2678

-2682

-2686

-2690

-2694

-2698

-2702

-2706

-2710

-2714

-2718

-2722

-2726

-2730

-2734

-2738

-2742

-2746

-2750

-2754

-2758

-2762

-2766

-2770

-2774

-2778

-2782

-2786

-2790

-2794

-2798

-2802

-2806

-2810

-2814

-2818

-2822

-2826

-2830

-2834

-2838

-2842

-2846

-2850

-2854

-2858

-2862

-2866

-2870

-2874

-2878

-2882

-2886

-2890

-2894

-2898

-2902

-2906

-2910

-2914

-2918

-2922

-2926

-2930

-2934

-2938

-2942

-2946

-2950

-2954

-2958

-2962

-2966

-2970

-2974

-2978

-2982

-2986

-2990

-2994

-2998

-3002

-3006

-3010

-3014

-3018

-3022

-3026

-3030

-3034

-3038

-3042

-3046

-3050

-3054

-3058

-3062

-3066

-3070

-3074

-3078

-3082

-3086

-3090

-3094

-3098

-3102

-3106

-3110

-3114

-3118

-3122

-3126

-3130

-3134

-3138

-3142

-3146

-3150

-3154

-3158

-3162

-3166

-3170

-3174

-3178

-3182

-3186

-3190

-3194

-3198

-3202

-3206

-3210

-3214

-3218

-3222

-3226

-3230

-3234

-3238

-3242

-3246

-3250

-3254

-3258

-3262

-3266

-3270

-3274

-3278

-3282

-3286

-3290

-3294

-3298

-3302

-3306

-3310

-3314

-3318

-3322

-3326

-3330

-3334

-3338

-3342

-3346

-3350

-3354

-3358

-3362

-3366

-3370

-3374

-3378

-3382

-3386

-3390

-3394

-3398

-3402

-3406

-3410

-3414

-3418

-3422

-3426

-3430

-3434

-3438

-3442

-3446

-3450

-3454

-3458

-3462

-3466

-3470

-3474

-3478

-3482

-3486

-3490

-3494

-3498

-3502

-3506

-3510

-3514

-3518

-3522

-3526

-3530

-3534

-3538

-3542

-3546

-3550

-3554

-3558

-3562

-3566

-3570

-3574

-3578

-3582

-3586

-3590

-3594

-3598

-3602

-3606

-3610

-3614

-3618

-3622

-3626

-3630

-3634

-3638

-3642

-3646

-3650

-3654

-3658

-3662

-3666

-3670

-3674

-3678

-3682

-3686

-3690

-3694

-3698

-3702

-3706

-3710

-3714

-3718

-3722

-3726

-3730

-3734

-3738

-3742

-3746

-3750

-3754

-3758

-3762

-3766

-3770

-3774

-3778

-3782

-3786

-3790

-3794

-3798

-3802

-3806

-3810

-3814

-3818

-3822

-3826

-3830

-3834

-3838

-3842

-3846

-3850

-3854

-3858

-3862

-3866

-3870

-3874

-3878

-3882

-3886

-3890

-3894

-3898

-3902

-3906

-3910

-3914

-3918

-3922

-3926

-3930

-3934

-3938

-3942

-3946

-3950

-3954

-3958

-3962

-3966

-3970

-3974

-3978

-3982

-3986

-3990

-3994

-3998

-4002

-4006

-4010

-4014

-4018

-4022

-4026

-4030

-4034

-4038

-4042

-4046

-4050

-4054

-4058

-4062

-4066

-4070

-4074

-4078

-4082

-4086

-4090

-4094

-4098

-4102

-4106

-4110

-4114

-4118

-4122

-4126

-4130

-4134

-4138

-4142

-4146

-4150

-4154

-4158

-4162

-4166

-4170

-4174

-4178

-4182

-4186

-4190

-4194

-4198

-4202

-4206

-4210

-4214

-4218

-4222

-4226

-4230

-4234

-4238

-4242

-4246

-4250

-4254

-4258

-4262

-4266

-4270

-4274

-4278

-4282

-4286

-4290

-4294

-4298

-4302

-4306

-4310

-4314

-4318

-4322

-4326

-4330

-4334

-4338

-4342

-4346

-4350

-4354

-4358

-4362

-4366

-4370

-4374

-4378

-4382

-4386

-4390

-4394

-4398

-4402

-4406

-4410

-4414

-4418

-4422

-4426

-4430

-4434

-4438

-4442

-4446

-4450

-4454

-4458

-4462

-4466

-4470

-4474

-4478

-4482

-4486

-4490

-4494

-4498

-4502

-4506

-4510

-4514

-4518

-4522

-4526

-4530

-4534

-4538

-4542

-4546

-4550

-4554

-4558

-4562

-4566

-4570

-4574

-4578

-4582

-4586

-4590

-4594

-4598

-4602

-4606

-4610

-4614

-4618

-4622

-4626

-4630

-4634

-4638

-4642

-4646

-4650

-4654

-4658

-4662

-4666

-4670

-4674

-4678

-4682

-4686

-4690

-4694

-4698

-4702

-4706

-4710

-4714

-4718

-4722

-4726

-4730

-4734

-4738

-4742

-4746

-4750

-4754

-4758

-4762

-4766

-4770

-4774

-4778

-4782

-4786

-4790

-4794

-4798

-4802

-4806

-4810

-4814

-4818

-4822

-4826

-4830

-4834

-4838

-4842

-4846

-4850

-4854

-4858

-4862

-4866

-4870

-4874

-4878

-4882

-4886

-4890

-4894

-4898

-4902

-4906

-4910

-4914

-4918

-4922

-4926

-4930

-4934

-4938

-4942

-4946

-4950

-4954

-4958

-4962

-4966

-4970

-4974

-4978

-4982

-4986

-4990

-4994

-4998

-5002

-5006

-5010

-5014

-5018

-5022

-5026

-5030

-5034

-5038

-5042

-5046

-5050

-5054

-5058

-5062

-5066

-5070

-5074

-5078

-5082

-5086

-5090

-5094

-5098

-5102

-5106

-5110

-5114

-5118

-5122

-5126

-5130

-5134

-5138

-5142

-5146

-5150

-5154

-5158

-5162

-5166

-5170

-5174

-5178

-5182

-5186

-5190

-5194

-5198

-5202

-5206

-5210

-5214

-5218

-5222

-5226

-5230

-5234

-5238

-5242

-5246

-5250

-5254

-5258

-5262

-5266

-5270

-5274

-5278

-5282

-5286

-5290

-5294

-5298

-5302

-5306

-5310

-5314

-5318

MODEL: Default
FILE NAME: C:\C54PDF\929745087_584\060-0350-D876\90-cda-19aBOR.dgn
9/13/2021 8:19:50 PM



Illinois Department of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 11/05/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 15, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.76347218 Long -90.16979886

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE
Solid Barrel NQ
Core Diameter 1.86 in
Top of Rock Elev. 340.7 ft
Begin Core Elev. 340.6 ft

BORING NO. BB-34
Station 1810+85.36
Offset 26.6 ft R (EB)
Ground Surface Elev. 391.3 ft

DEPTH (ft)	CORE (#)	RECOVER (%)	RECOVER (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
3	98	98		5		
Limestone: Gray, moderately hard, very finely crystalline, medium to thickly bedded, slightly weathered, dense. (continued)						
					274.4	0.8
Brecciated at 73.0-74.5 feet. Depth 73.2', Dry Density: 160.0 pcf.						
					923.4	0.3
Depth 76.0', Dry Density: 164.5 pcf.						
Boring terminated at 80.7 feet.						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =
CHECKED -
PLOT SCALE =
PLOT DATE =

DESIGNED -
CHECKED -
DRAWN - JGS
CHECKED -

REVISED -
REVISED -
REVISED -
REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 15
STRUCTURE NO. 060-0350 (EB)

SHEET 267 OF 292 SHEETS

Page 1 of 1

Date 04/12/21

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 16, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763280 Long -90.168989

COUNTY Madison DRILLING METHOD HSA, NQ Casing HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	406.3 ft	D	B	U	M
Station	806+89.23	E	L	C	O	Stream Bed Elev.	ft	E	L	C	O

BORING NO.	BB-36	T	W	S	Groundwater Elev.:	T	W	S
Station	1813+23.34	H	S	Qu	First Encounter	H	S	Qu
					ft			

Offset	28.8 ft R (EB)					Upon Completion					
Ground Surface Elev.	414.0	ft	(ft)	(/6")	(tsf)	(%)	After	Hrs.		ft	(ft) (/6") (tsf) (%)

River surface elevation at 414.0 (+/-) feet. Surface elevation at river bottom = 376.8 (+/-) feet.			
--	--	--	--

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 2 of 1

Date 04/12/21

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 16, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763280 Long -90.168989

COUNTY Madison DRILLING METHOD HSA, NQ Casing HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	406.3 ft	D	B	U	M
Station	806+89.23	E	L	C	O	Stream Bed Elev.	ft	E	L	C	O

BORING NO.	BB-36	T	W	S	Groundwater Elev.:	T	W	S
Station	1813+23.34	II	S	Qu	First Encounter	II	S	Qu
					_____ ft			

Offset	28.8 ft R (EB)					Upon Completion					
Ground Surface Elev.	414.0	ft	(ft)	(/6")	(tsf)	(%)	After	Hrs.		ft	(ft) (/6") (tsf) (%)



50/0"	NC	--
349.0	65	
Borehole continued with rock coring.		
50	70	
65	75	
80		

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 1 of 1Date 04/12/21

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION	60B-1	LOCATION	Pier 16, SEC. 26, TWP. 4N, RNG. 10W						
			Lat 38.763280 Long -90.168989						

COUNTY	<u>Madison</u>	CORING METHOD	<u>Conventional</u>	R		CORE	S	M
--------	----------------	---------------	---------------------	---	--	------	---	---

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE	NQ	D E F	C O V	Q	T I M	R E N	I S T
Station	806+89.23								

BORING NO.	BB-36	Top of Rock Elev.	349.0	ft	P T H	R E R Y	D .	E	G T H	C R E
Station	1813+23.34	Begin Core Elev.	349.0	ft						

Offset	28.8 ft R (EB)						
Ground Surface Elev.	414.0	ft	(ft)	(#)	(%)	(%)	(min/ft)
						(tsf)	(%)

Limestone: Light gray, hard to very hard, very finely crystalline, banded to thinly bedded, slightly weathered, dense, with clayey shale deposits.	349.0	1	100	66	4.2		
--	-------	---	-----	----	-----	--	--

Depth (ft)	Soil Description	Moisture (%)	Specific Gravity	Unit Weight (pcf)
71.3	Depth 71.3'; Dry Density: 168.6 pcf. With vertical fractures possibly caused by coring process.	880.7	0.1	
73.5	Boring terminated at 73.5 feet.			

Color pictures of the cores Yes
 Cores will be stored for examination until completion
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BORING LOGS – PIER 16
STRUCTURE NO. 060-0350 (EB)

SHEET 268 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	468
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\CS4PDF\9297\45087_586\060-0350-D876J90-cda-20aBOR.dgn

9/13/2021 8:23:30 PM

MODEL: Default
FILE NAME: C:\C54PDF\929745087_589\060-0350-D876\9b-cda-2\1aBOR.dgn
9/13/2021 8:23:26 PM



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 04/21/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SC

SECTION 60B-1LOCATION Pier 16, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763356 Long -90.169075

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-36a
Station 1813+23.34
Offset 28.8 ft R (EB)
Ground Surface Elev. 404.2 ft

DEPTHS (ft) (ft) (/6") (tsf) (%)

Surface Water Elev. 396.8 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

DEPTHS (ft) (/6") (tsf) (%)

River surface elevation at 404.2 (+/-) feet. Surface elevation at river bottom = 374.3 (+/-) feet.

No sampling from the mudline to top of bedrock. See BB-36 for sampled materials.

374.3

384.2 -20

364.2 -40

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 04/21/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SC

SECTION 60B-1LOCATION Pier 16, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763356 Long -90.169075

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-36a
Station 1813+23.34
Offset 28.8 ft R (EB)
Ground Surface Elev. 404.2 ft

DEPTHS (ft) (/6") (tsf) (%)

Surface Water Elev. 396.8 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

DEPTHS (ft) (/6") (tsf) (%)

Borehole continued with rock coring.

247.6

-60

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 04/21/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SC

SECTION 60B-1LOCATION Pier 16, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763356 Long -90.169075

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-36a
Station 1813+23.34
Offset 28.8 ft R (EB)
Ground Surface Elev. 404.2 ft

DEPTHS (ft) (#) (%)

CORING BARREL TYPE & SIZE NQ
Core Diameter 2.06 in
Top of Rock Elev. 347.6 ft
Begin Core Elev. 347.6 ft

RECOVERY (%)
R.Q.D. (%)
CORE TIME (min/ft)
STRENGTH (tsf)
MOISTURE (%)

Limestone: Light gray, hard to very hard, aphanitic, thin to thick bedding, slightly weathered, dense. 347.6

Interbedded with clayey shale from about 57.8 to 58.6 feet.
Depth 57.8', Dry Density: 167.2 pcf.

Massive bedded.

Depth 65.9', Dry Density: 168.0 pcf.

Depth 70.8', Dry Density: 166.5 pcf.

Depth 76.1', Dry Density: 163.7 pcf.

1 97 63 4.1 697.3 0.1

2 100 100 3.5 936.9 0.1

3 99 98 3.9 652.5 0.3

564.3 0.1

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 16
STRUCTURE NO. 060-0350 (EB)

SHEET 269 OF 292 SHEETS

F.A.J RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	469
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

Page 2 of 2Date 04/21/21

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 16, SEC. 26, TWP. 4N, RNG. 10W
Lat 38.763356 Long -90.169075

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB) CORING BARREL TYPE & SIZE NQ
Station 806+89.23

BORING NO.	<u>BB-36a</u>	Top of Rock Elev.	<u>347.6</u>	ft
Station	<u>1813+23.34</u>	Begin Core Elev.	<u>347.6</u>	ft
Offset	<u>28.8 ft R (EB)</u>			
Ground Surface Elev.	<u>404.2</u>			ft

Limestone: Light gray, hard to very hard, aphanitic, thin to thick bedding, slightly weathered, dense. (continued)
Massive to thinly bedded.

Depth 78.8', Dry Density: 165.5 pcf

Depth 84.2', Dry Density: 167.1 pcf

Boring terminated at 86.6 feet

Color pictures of the cores Yes
Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

E LOG

Page 2 of 2

Date 04/21/21

pi River

LOGGED BY SCI

RNG. 10W
9075

D E P T H (ft)	C O R E (#)	R E C O V E R Y (%)	R . Q . D . (%)	CORE T I M E (min/ft)	S T R E N G T H (tsf)	M O I S T U R E (%)
	4	100	84	3.9		
-80					604.3	0.3
-85					555.3	0.1
-90						
-95						

le (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

REVIEW & INSPECTION ONLY



USER NAME =

DESIGNED -

CHECKED -

PLOT SCALE =

DRAWN -

PLOT DATE ==

CHECKED -

REVISÉ -

REVISÉ -

REVISÉ -

REVISÉ -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 16
STRUCTURE NO. 060-0350 (EB)

SHEET 270 OF 292 SHEETS

F.A.J.

370

SECTION

608 1

COUNTY

MADISO

TOTAL
SHEETS

860

CONTRACT NO. 76100

ILLINOIS	FED. AID PROJECT
----------	------------------

MODEL: Default
FILE NAME: C:\C54PDF\929745087_588\060-0350-D876\9b-cda+2.aBOR.dgn



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 4/06-07/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 17, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.763122 Long -90.168363

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-38
Station 1815+17.74
Offset 32.8 ft R (EB)
Ground Surface Elev. 406.0 ft

DEPTHS(ft)(/6")

UCS(tsf)

MOISTURE(%)

Surface Water Elev. 398.6 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

DEPTHS(ft)(/6")

UCS(tsf)

MOISTURE(%)

River surface elevation at 406.0 (+/-) feet. Surface elevation at river bottom = 391.6 (+/-) feet. Sampling began 16.7 feet below water level.

Sand: Gray, fine to coarse grained, very loose to medium dense, very moist to wet. A-3. (continued) With clay lumps.

Trace fine gravel.

Fine grained and no gravel.

Clay Loam: Gray, very soft, very moist. A-7.

Silt: Gray, very, soft, very moist. A-4.

386.5

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 4/06-07/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 17, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.763122 Long -90.168363

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-38
Station 1815+17.74
Offset 32.8 ft R (EB)
Ground Surface Elev. 406.0 ft

DEPTHS(ft)(/6")

UCS(tsf)

MOISTURE(%)

Surface Water Elev. 398.6 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

DEPTHS(ft)(/6")

UCS(tsf)

MOISTURE(%)

Sand: Gray, fine to coarse grained, very loose to medium dense, very moist to wet. A-3. (continued) Trace coarse sand and fine gravel.

Sand: Gray, fine to coarse grained, medium dense, trace fine gravel, very moist to wet. A-1.

Sand: Gray, fine grained, medium dense, very moist to wet. A-3.

Limestone Boring abandoned due to outer casing locked in place (22 ft of casing removed with the lower

346.6

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 04/07/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 17, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.763155 Long -90.168357

COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-38a
Station 1815+17.74
Offset 32.8 ft R (EB)
Ground Surface Elev. 405.1 ft

DEPTHS(ft)(/6")

UCS(tsf)

MOISTURE(%)

Surface Water Elev. 397.8 ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

DEPTHS(ft)(/6")

UCS(tsf)

MOISTURE(%)

River surface elevation at 405.1 (+/-) feet. Surface elevation at river bottom = 392.3 (+/-) feet.

No SPT sampling from the mudline to top of bedrock. See BB-38 for SPT sampled materials.

385.1

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 17
STRUCTURE NO. 060–0350 (EB)

SHEET 271 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	471
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: C:\C54PDF\929745087_592\060-0350-D876\90-cda-24aBOR.dgn



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 04/07/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCILocation Pier 17, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.763155 Long -90.168357

SECTION 60B-1COUNTY MadisonDRILLING METHOD HSA, NQ CasingHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-38a
Station 1815+17.74
Offset 32.8 ft R (EB)
Ground Surface Elev. 405.1 ft

DEPTHS (ft) (in) (tsf) (%)

Surface Water Elev. 397.8 ft

Stream Bed Elev. ft

Groundwater Elev.:
First Encounter ft
Upon Completion ft
After Hrs. ft

346.3

Borehole continued with rock coring.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 04/07/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCILocation Pier 17, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.763155 Long -90.168357

SECTION 60B-1COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-38a
Station 1815+17.74
Offset 32.8 ft R (EB)
Ground Surface Elev. 405.1 ft

CORING BARREL TYPE & SIZE NQ
Core Diameter 1.86 in
Top of Rock Elev. 346.3 ft
Begin Core Elev. 346.3 ft

RECOVERY (%) 98
CORRECTION (%) 87
CORE TIME (min/ft) 3.5
STRENGTH (tsf) 615.3
MOISTURE (%) 0.1

346.3

Limestone: Light gray, hard to very hard, very finely crystalline, massive bedding, slightly weathered, dense.

615.3

Depth 61.9', Dry Density: 167.6 pcf.

615.3

Depth 68.0', Dry Density: 166.9 pcf.

615.3

Depth 71.2', Dry Density: 165.6 pcf.

615.3

Depth 77.0', Dry Density: 166.0 pcf.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 04/07/21

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCILocation Pier 17, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.763155 Long -90.168357

SECTION 60B-1COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-38a
Station 1815+17.74
Offset 32.8 ft R (EB)
Ground Surface Elev. 405.1 ft

CORING BARREL TYPE & SIZE NQ
Core Diameter 1.86 in
Top of Rock Elev. 346.3 ft
Begin Core Elev. 346.3 ft

RECOVERY (%) 100
CORRECTION (%) 90
CORE TIME (min/ft) 3.7
STRENGTH (tsf) 696.2
MOISTURE (%) 0.2

316.4

Thin to thick bedded.
Limestone: Light gray, hard to very hard, very finely crystalline, massive bedding, slightly weathered, dense. (continued)
Depth 78.9', Dry Density: 165.4 pcf.

696.2

Depth 86.1', Dry Density: 166.5 pcf.

696.2

Boring terminated at 88.7 feet.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 17
STRUCTURE NO. 060–0350 (EB)

SHEET 272 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	472
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\C54PDF\929745087_598\060-0350-D876\9b-cda-25aBOR.dgn
9/13/2021 8:25:41 PM



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 11/5-6/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCISCI

SECTION 60B-1LOCATION Pier 18, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76292731 Long -90.16776551

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-44
Station 1816+98.12
Offset 36.5 ft R (EB)
Ground Surface Elev. 416.0 ft

DEPTH (ft)

DIAG. (in)

WATER (in)

TEMP. (F)

MOIST. (%)

UCS (tsf)

Surface Water Elev. ft

Stream Bed Elev. ft

Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

DEPTH (ft)

DIAG. (in)

WATER (in)

TEMP. (F)

MOIST. (%)

UCS (tsf)

Clay: Gray, soft, moist, fill, with layers of fine sand, A-6.

Dark gray, Atterberg Limits test performed.

Medium stiff, with crushed rock.

Silty Clay: Light to dark gray, medium stiff, moist, fill, with layers of fine sand, A-6.

Clay Loam: Gray, medium stiff, moist, A-4.
Grain Size Analysis performed.

Clay: Gray, soft, moist, A-7.

Atterberg Limits test performed.

Clay: Gray, soft, moist, A-7. (continued)

Sandy Loam: Gray, very loose to loose, moist, fine grained, A-2.
Grain Size Analysis performed.

Silty Clay: Gray, medium stiff, moist, A-6.

Sand: Gray, medium dense, moist, fine to coarse grained, A-3.

Gray and brown.

Gray.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 11/5-6/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCISCI

SECTION 60B-1LOCATION Pier 18, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76292731 Long -90.16776551

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-44
Station 1816+98.12
Offset 36.5 ft R (EB)
Ground Surface Elev. 416.0 ft

DEPTH (ft)

DIAG. (in)

WATER (in)

TEMP. (F)

MOIST. (%)

UCS (tsf)

Surface Water Elev. ft

Stream Bed Elev. ft

Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

DEPTH (ft)

DIAG. (in)

WATER (in)

TEMP. (F)

MOIST. (%)

UCS (tsf)

Sand: Gray, medium dense, moist, fine to coarse grained, A-3. (continued)

Trace organics.

Medium dense, trace limestone gravel.

Weathered Limestone.

Borehole continued with rock coring.

With wood.

Sand: Gray, dense, moist, trace organics, A-1.

Trace organics.

Medium dense, trace limestone gravel.

Weathered Limestone.

Borehole continued with rock coring.

With wood.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 11/5-6/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCISCI

SECTION 60B-1LOCATION Pier 18, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76292731 Long -90.16776551

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-44
Station 1816+98.12
Offset 36.5 ft R (EB)
Ground Surface Elev. 416.0 ft

DEPTH (ft)

DIAG. (in)

WATER (in)

TEMP. (F)

MOIST. (%)

UCS (tsf)

Surface Water Elev. ft

Stream Bed Elev. ft

Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

DEPTH (ft)

DIAG. (in)

WATER (in)

TEMP. (F)

MOIST. (%)

UCS (tsf)

Shaley Limestone: Gray, hard to very hard, aphanitic to very finely crystalline, banded to thinly bedded, moderately weathered, dense, with clay seams.

Depth 74.6 feet. Dry Density: 166.6 pcf.

Depth 78.0 feet. Dry Density: 167.3 pcf.

Thinly bedded.
Depth 83.6 feet. Dry Density: 166.0 pcf.

Depth 88.4 feet. Dry Density: 167.3 pcf.

Depth 91.2 feet. Dry Density: 167.0 pcf.

Coring Barrel Type & Size NX
Core Diameter 2.06 in
Top of Rock Elev. 345.0 ft
Begin Core Elev. 343.0 ft

DEPTH (ft)

DIAG. (in)

WATER (in)

TEMP. (F)

MOIST. (%)

UCS (tsf)

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

USER NAME =	DESIGNED -	REVISED -
CHECKED -	REVISED -	
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 18
STRUCTURE NO. 060-0350 (EB)

SHEET 273 OF 292 SHEETS

FAI RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	473
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: C:\C54PDF\925745087_590\060-0350-D876\90-cda-26aBOR.dgn
9/13/2021 8:25:27 PM



Illinois Department of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 11/5-6/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 18, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76292731 Long -90.16776551

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE Solid Barrel NX
Core Diameter 2.06 in
Top of Rock Elev. 345.0 ft
Begin Core Elev. 343.0 ft

BORING NO. BB-44
Station 1816+98.12
Offset 36.5 ft R (EB)
Ground Surface Elev. 416.0 ft

DEPTH (ft)	CORE (#)	RECOVERY (%)	RECOVERED (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
Shaley Limestone: Gray, hard to very hard, aphanitic to very finely crystalline, banded to thinly bedded, moderately weathered, dense, with clay seams. (continued)						
-95						
Depth 96.3 feet. Dry Density: 168.2 pcf.						
-100					1026.9	0.1
314.0						
Boring terminated at 102.0 feet.						
-105						
-110						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

90% FOR
REVIEW & INSPECTION ONLY



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 18
STRUCTURE NO. 060-0350 (EB)

SHEET 274 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	474
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

Page 1 of 2

Date 9/05-06/2018

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 2 of 2

Date 9/05-06/2018

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

Grain Size Analysis Test performed.	5 6 9	NC	--	374.0	Gravel, fine to coarse grained, very dense, with fine to coarse sand, possible cobbles, A-1. (continued)	354.0	55 14 13	NC	--
Sand: Gray, fine to coarse grained, medium dense to dense, trace fine gravel, A-2. (continued)	5 6 9	NC	--	374.0	Sand: coarse grained, medium dense, possible cobbles and boulders, A-1.	352.5	55 14 13	NC	--
Sandy Loam: Gray, fine to coarse grained, medium dense to dense, trace fine gravel, A-1-b.	5 6 9	NC	--	374.0	Sand: Gray, fine to coarse grained, medium dense, with fine to coarse gravel, A-1.	352.5	55 14 13	NC	--
Sand: Gray, fine to coarse grained, medium dense, A-2.	16 17 9	NC	--	369.0	Sand: Gray, fine to coarse grained, medium dense, trace fine gravel, A-2.	349.0	13 13 13	NC	--
Sand: Gray, fine to coarse grained, medium dense to very dense, trace fine gravel, A-1.	11 12 12	NC	--	364.0	Cobble.	341.0	50/4.5 50/0.5	NC	--
Weathered Limestone: Gray. No recovery at 76 and 76.5 ft. End of drilling on 9/4 at 76 feet. Boring terminated at 76.5 feet. Boring grouted to 76.5 feet.	41 30 23	NC	--	356.3		339.5	100/0' 100/0' 100/0'	NC	--

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

MODEL: Default
FILE NAME: C:\C54PDF\929745087_5911060-0350-D876\90-cda-28aBOR.dgn



Illinois Department
of Transportation
Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 11/9-10/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 20, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.7624999 Long -90.16614979

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23
BORING NO. BB-46
Station 1821+84.41
Offset 42.4 ft R (EB)
Ground Surface Elev. 414.5 ft

DEPTH (ft)	DIAGNOSTIC TESTS (ft)	UCS (tsf)	MOISTURE (%)
0	8	0.8	11
2	10	B/20	
4	18	0.8	20
6	31	S/20	
8	3	0.3	19
10	3	S/10	
12	1	0.8	38
14	1	S/15	
16	1	0.4	35
18	1	B/20	
20	5	NC	--
22	7		
24	6	NC	--
26	6		
28	7		
30	3	NC	--
32	5		
34	9		

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter 406.0 ft
Upon Completion ft
After Hrs. None ft

Sand: Gray, loose to medium dense, moist, fine to coarse grained, A-3.
Grain Size Analysis performed.

Sand: Gray, loose, coarse-grained, crushed rock, fill, A-1.
Grain Size Analysis performed.

Clay: Gray, trace brown, soft, A-7.

Atterberg Limits test performed.

Silty Clay: Gray, soft, moist, A-6.

Sandy Loam: Gray, medium dense, moist, A-2.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department
of Transportation
Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 11/9-10/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 20, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.7624999 Long -90.16614979

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23
BORING NO. BB-46
Station 1821+84.41
Offset 42.4 ft R (EB)
Ground Surface Elev. 414.5 ft

DEPTH (ft)	DIAGNOSTIC TESTS (ft)	UCS (tsf)	MOISTURE (%)
0	8	0.8	11
2	10	B/20	
4	18	0.8	20
6	31	S/20	
8	3	0.3	19
10	3	S/10	
12	1	0.8	38
14	1	S/15	
16	1	0.4	35
18	1	B/20	
20	5	NC	--
22	7		
24	6	NC	--
26	6		
28	7		
30	3	NC	--
32	5		
34	9		

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter 406.0 ft
Upon Completion ft
After Hrs. None ft

Sandy Loam: Gray, dense, moist, fine-grained, A-3. (continued)
Sand: Gray, medium dense, moist, fine to coarse grained, A-3.

Sand: Gray, loose to medium dense, moist, fine to coarse grained, A-3. (continued)

Sand: Gray, medium dense, moist, fine grained, A-2.

Weathered Limestone.

Sandy Loam: Gray, dense, moist, fine-grained, A-3.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department
of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 11/9-10/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 20, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.7624999 Long -90.16614979

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23
BORING NO. BB-46
Station 1821+84.41
Offset 42.4 ft R (EB)
Ground Surface Elev. 414.5 ft

DEPTH (ft)	DIAGNOSTIC TESTS (ft)	UCS (tsf)	MOISTURE (%)
0	8	0.8	11
2	10	B/20	
4	18	0.8	20
6	31	S/20	
8	3	0.3	19
10	3	S/10	
12	1	0.8	38
14	1	S/15	
16	1	0.4	35
18	1	B/20	
20	5	NC	--
22	7		
24	6	NC	--
26	6		
28	7		
30	3	NC	--
32	5		
34	9		

Shale Limestone: Gray, aphanitic to very finely crystalline, banded to medium bedding, slightly to moderately weathered, dense.

Depth 78.2 feet. Dry Density: 167.3 pcf.

Depth 82.2 feet. Dry Density: 174.2 pcf.

Limestone: Gray, hard, aphanitic to very finely crystalline, thinly bedded, slightly weathered, dense.

Depth 89.6 feet. Dry Density: 166.6 pcf.

Depth 91.7 feet. Dry Density: 175.4 pcf.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME	=	DESIGNED	-	REVISED	-
CHECKED	-	REVISED	-		
PLOT SCALE	=	DRAWN	-	REVISED	-
PLOT DATE	=	CHECKED	-	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 20
STRUCTURE NO. 060-0350 (EB)

SHEET 276 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	476
				CONTRACT NO. 76J90
ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: C:\C54PDF\929745087_597060-0350-D876J90-cda-29aBOR.dgn
9/13/2021 8:24:42 PM



Illinois Department of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 11/9-10/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 20, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.7624999 Long -90.16614979

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE Solid Barrel NX
Core Diameter 2.06 in
Top of Rock Elev. 341.0 ft
Begin Core Elev. 339.0 ft

BORING NO. BB-46
Station 1821+84.41
Offset 42.4 ft R (EB)
Ground Surface Elev. 414.5 ft

DEPTH (ft)	RECOVERY (%)	RECOVERED (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
3	98	44	3.3		
Shaley Limestone: Gray, hard, aphanitic to very finely crystalline, banded to medium bedded, slightly weathered, dense. (continued)					
Depth 97.5 feet. Dry Density: 173.7 pcf.					
-100					
Depth 102.5 feet. Dry Density: 168.7 pcf.					
-105					
309.0					
Boring terminated at 105.5 feet.					
-110					
-115					

Color pictures of the cores ☐ Yes

Cores will be stored for examination until ☐ completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS -- PIER 20
STRUCTURE NO. 060-0350 (EB)

SHEET 277 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	477
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: C:\C54PDF\929745087_593\060-0350-D876\90-cda-30aBOR.dgn



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCIDate 10/28/20

SECTION 60B-1LOCATION Pier 21, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76231612 Long -90.16539652

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-52
Station 1824+09.39
Offset 39.8 ft R (EB)
Ground Surface Elev. 415.2 ft

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter 406.7 ft
Upon Completion ft
After Hrs. 406.7 ft

DEPTHS (ft) (in) (tsf) (%)
BULGE (in) (tsf) (%)
UCS (tsf) (%)
MOISTURE (%)

Silty Clay: Brown and gray, moist, trace crushed rock, fill, A-7.
Atterberg Limits test performed.
Silty Clay: Gray and light gray, soft, moist, A-7.
Silt: Gray, trace brown, soft, moist, trace organics A-6
Grain Size Analysis performed.
Clay: Gray, very soft, moist, A-7.
Silty Clay Loam: Gray, trace brown, soft, moist, A-6.
Grain Size Analysis performed.
Sand: Gray, medium dense, moist, fine to coarse grained, A-2.

Sand: Gray, medium dense to dense, moist, A-3.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCIDate 10/28/20

SECTION 60B-1LOCATION Pier 21, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76231612 Long -90.16539652

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-52
Station 1824+09.39
Offset 39.8 ft R (EB)
Ground Surface Elev. 415.2 ft

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter 406.7 ft
Upon Completion ft
After Hrs. 406.7 ft

DEPTHS (ft) (in) (tsf) (%)
BULGE (in) (tsf) (%)
UCS (tsf) (%)
MOISTURE (%)

Sand: Gray, medium dense to dense, moist, A-3. (continued)
Loose.
Weathered Limestone.
Borehole continued with rock coring.

Sand: Gray, medium dense, moist, A-1.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCIDate 10/28/20

SECTION 60B-1LOCATION Pier 21, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76231612 Long -90.16539652

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-52
Station 1824+09.39
Offset 39.8 ft R (EB)
Ground Surface Elev. 415.2 ft

CORING BARREL TYPE & SIZE NX
Core Diameter 2.06 in
Top of Rock Elev. 338.7 ft
Begin Core Elev. 337.2 ft

DEPTH (ft) (in) (tsf) (%)
RECOVERY (%)
CORRECTION (%)
CORE TIME (min/ft)
STRENGTH (tsf) (%)
MOISTURE (%)

Limestone: Gray, hard, very finely crystalline, thinly bedded, moderately weathered, dense.
Depth 78.3 feet. Dry Density: 166.8 pcf.
Soft, highly weathered.
Hard, slightly to moderately weathered.
Depth 84.9 feet. Dry Density: 166.1 pcf.
Depth 88.4 feet. Dry Density: 167.6 pcf.
Depth 94.9 feet. Dry Density: 167.6 pcf.

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

USER NAME =	DESIGNED -	REVISED -
CHECKED -	REVISED -	
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 21
STRUCTURE NO. 060–0350 (EB)

SHEET 278 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	478
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

9/13/2021 8:23:57 PM

MODEL: Default
FILE NAME: C:\C54PDF\925745087_599\060-0350-D876\90-cda-3\LABOR.dgn
9/13/2021 8:24:55 PM



Illinois Department of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 10/28/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 21, SEC. 25, TWP. 4N, RNG. 10W
Lat 38.76231612 Long -90.16539652

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE
Solid Barrel NX

BORING NO. BB-52
Station 1824+09.39
Offset 39.8 ft R (EB)
Ground Surface Elev. 415.2 ft

Core Diameter 2.06 in
Top of Rock Elev. 338.7 ft
Begin Core Elev. 337.2 ft

DEPTH (ft)	CORE (#)	RECOVER (%)	R.Q.D. (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
3	100	70	3.2			
Limestone: Gray, hard, very finely crystalline, thin to medium bedded, moderately weathered, dense.						
-100						
Depth 101.3 feet. Dry Density: 167.0 pcf.						
-105					630.1	0.1
-110						
Depth 107.2 feet. Dry Density: 156.0 pcf.						
-115					416.0	0.1
Boring terminated at 108.0 feet.						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

90% FOR REVIEW & INSPECTION ONLY



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 21
STRUCTURE NO. 060–0350 (EB)

SHEET 279 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	479
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: C:\C54PDF\929745087_595\060-0350-D876\90-cda-32aBOR.dgn



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Dat6/20,27-28/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 22, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76211524 Long -90.16461049

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-54
Station 1826+45.17
Offset 40.2 ft R (EB)
Ground Surface Elev. 413.7 ft

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter 405.2 ft
Upon Completion ft
After Hrs. ft

DEPTHS (ft) (6") (tsf) (%)

7
6
6

3.9
S/10

13

No crushed concrete or wood.

5
5
6

3.1
S/20

19

Grain Size Analysis performed.

3
2
3

0.8
S/20

20

405.2

Sand: Brown, fine to coarse grained, loose, moist, A-3.

2
3
4

NC

403.2

Clay: Dark gray, soft to medium stiff, moist, A-6.

5
2
2

NC

42

401.7

Silty Clay Loam: Gray, very soft to soft, moist, A-6.

1
1
0

NC

34

2
1
1

NC

37

Dense.

2
2
2

NC

33

393.7

-20

0

DEPTHS (ft) (6") (tsf) (%)

5
7
9

NC

--

6
8
5

NC

--

6
5
9

NC

--

6
8
11

NC

--

6
6
6

NC

--

6
6
6

NC

--

6
8
6

NC

--

6
7
6

NC

--

373.7

-40

14

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Dat6/20,27-28/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 22, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76211524 Long -90.16461049

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-54
Station 1826+45.17
Offset 40.2 ft R (EB)
Ground Surface Elev. 413.7 ft

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter 405.2 ft
Upon Completion ft
After Hrs. ft

DEPTHS (ft) (6") (tsf) (%)

3
6
11

NC

--

13
9
7

NC

--

6
9
14

NC

--

6
9
12

NC

--

336.7

Borehole continued with rock coring.

353.7

-60

6

DEPTHS (ft) (6") (tsf) (%)

5
7
9

NC

--

6
8
5

NC

--

6
5
9

NC

--

6
6
6

NC

--

6
6
6

NC

--

6
8
6

NC

--

6
7
6

NC

--

353.7

-60

6

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Dat6/20,27-28/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 22, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76211524 Long -90.16461049

COUNTY MadisonCORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-54
Station 1826+45.17
Offset 40.2 ft R (EB)
Ground Surface Elev. 413.7 ft

CORING BARREL TYPE & SIZE NX
Core Diameter 2.06 in
Top of Rock Elev. 336.7 ft
Begin Core Elev. 335.2 ft

DEPTH (ft) (6") (tsf) (%)

1
98

85

2.4

877.0

0.1

80

85

87.3

Limestone: Light gray, hard, very finely crystalline, thin to medium bedded, slightly to moderately weathered, dense, with shale partings.
Depth 78.7 feet. Dry Density: 167.5 pcf.

89.1

Depth 87.3 feet. Dry Density: 167.5 pcf.

89.1

Depth 89.1 feet. Dry Density: 167.4 pcf.

95

Gray.
Depth 95.4 feet. Dry Density: 152.2 pcf.

95

12 inch vertical fracture.

315.2

DEPTH (ft) (6") (tsf) (%)

2
100

67

1.7

874.8

0.1

90

95

95.4

Gray.
Depth 95.4 feet. Dry Density: 152.2 pcf.

95

12 inch vertical fracture.

315.2

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 22
STRUCTURE NO. 060–0350 (EB)

SHEET 280 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	480
			CONTRACT NO. 76J90	
ILLINOIS FED. AID PROJECT				

9/13/2021 8:24:13 PM

MODEL: Default
FILE NAME: C:\C54PDF\929745087_601060-0350-D876J90-cda-3aBOR.dgn
9/13/2021 8:25:52 PM



Illinois Department of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 02/20/2027-28/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 22, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76211524 Long -90.16461049

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE Solid Barrel NX
Core Diameter 2.06 in
Top of Rock Elev. 336.7 ft
Begin Core Elev. 335.2 ft

BORING NO. BB-54
Station 1826+45.17
Offset 40.2 ft R (EB)
Ground Surface Elev. 413.7 ft

DEPTH (ft)	CORE (#)	RECOVER (%)	RECOVER (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
3	100	92	3.4			
Limestone: Gray, hard, very finely crystalline, thin to medium bedded, slightly to moderately weathered, dense.						
6 inch vertical fracture.						
Depth 101.3 feet. Dry Density: 159.3 pcf.						
4 inch vertical fracture.						
Depth 107.7 feet. Dry Density: 168.7 pcf.						
Boring terminated at 108.5 feet.						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 22
STRUCTURE NO. 060–0350 (EB)

SHEET 281 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	481
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

Page 1 of 3Date 9/19-20/2018

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76194319 Long -90.16417755

COUNTY Madison DRILLING METHOD HSA, Mud Rotary HAMMER TYPE Automatic

Surface Water Elev. _____	ft	D	B	U	M
Stream Bed Elev. _____	ft	E	L	C	O
		P	O	S	I
Groundwater Elev.:		T	W		S
First Encounter _____	397.8 ft ▼	H	S	Qu	T
Upon Completion _____	ft				
After _____	Hrs. ft	(ft)	(/6")	(tsf)	(%)

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 2 of 3

Date 9/19-20/2018

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76194319 Long -90.16417755

COUNTY Madison DRILLING METHOD HSA, Mud Rotary HAMMER TYPE Automatic

Surface Water Elev. _____ ft
Stream Bed Elev. _____ ft

Groundwater Elev.:
First Encounter _____ 397.8 ft ▼
Upon Completion _____ ft
After _____ Hrs. _____ ft

D E P T H	B L O W S	U C S	M Q I S T
(ft)	(6")	(tsf)	(%)

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 3 of 3

Date 9/19-20/2018

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76194319 Long -90.16417755

COUNTY Madison DRILLING METHOD HSA, Mud Rotary HAMMER TYPE Automatic

Surface Water Elev. _____ ft
Stream Bed Elev. _____ ft

Groundwater Elev.:
First Encounter _____ 397.8 ft ▼
Upon Completion _____ ft
After _____ Hrs. _____ ft

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



USER NAME	=
PLOT SCALE	=
PLOT DATE	=

DESIGNED	-
CHECKED	-
DRAWN	-
CHECKED	-

REVISED	-
REVISED	-
REVISED	-
REVISED	-

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BORING LOGS - PIER 23
STRUCTURE NO. 060-0350 (EB)

SHEET 282 OF 292 SHEETS

F.AJ RTE.	270

SECTION	
60B-1	
	1111

COUNTY
MADISON
CONTRACT
PROJECT

TOTAL SHEETS	
860	
NO. 76J	

ILLINOIS	FED. AID PROJECT
----------	------------------

MODEL: Default
FILE NAME: C:\C54PDF\929745087_600\060-0350-D876\90-cda-35aBOR.dgn



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 10/16/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 23, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76192505 Long -90.16381082

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-56
Station 1828+83.45
Offset 35.8 ft R (EB)
Ground Surface Elev. 414.0 ft

DEPTH
H

BL
O

UC
S

MO
I
S
T

Qu

(ft)

(/6")

(tsf)

(%)

Surface Water Elev. ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

Clay: Brownish gray, medium stiff, moist, A-7.

Sandy Loam: Brown and gray, fine to coarse grained, loose to medium stiff, moist, A-2.

Clay Loam: Brown, medium stiff, moist, A-6.

Sand: Brown, fine to coarse grained, loose, moist, A-1.

Silty Loam: Brown, medium stiff to stiff, moist, A-4.

Grain Size Analysis performed.

Sand: Brown and gray, fine to coarse grained, medium dense, moist, A-1.

DEPTH
H

BL
O

UC
S

MO
I
S
T

Qu

(ft)

(/6")

(tsf)

(%)

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 10/16/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 23, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76192505 Long -90.16381082

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-56
Station 1828+83.45
Offset 35.8 ft R (EB)
Ground Surface Elev. 414.0 ft

DEPTH
H

BL
O

UC
S

MO
I
S
T

Qu

(ft)

(/6")

(tsf)

(%)

Surface Water Elev. ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

Sand: Brown and gray, fine to coarse grained, loose to medium stiff, moist, A-1.

Sand: Brown and gray, fine to coarse grained, loose to medium stiff, moist, A-1. (continued)

Weathered Limestone.

DEPTH
H

BL
O

UC
S

MO
I
S
T

Qu

(ft)

(/6")

(tsf)

(%)

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

SOIL BORING LOG

Page 3 of 2

Date 10/16/20

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCI

SECTION 60B-1LOCATION Pier 23, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76192505 Long -90.16381082

COUNTY MadisonDRILLING METHOD CFA, Mud RotaryHAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-56
Station 1828+83.45
Offset 35.8 ft R (EB)
Ground Surface Elev. 414.0 ft

DEPTH
H

BL
O

UC
S

MO
I
S
T

Qu

(ft)

(/6")

(tsf)

(%)

Surface Water Elev. ft
Stream Bed Elev. ft

Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

Weathered Limestone.
(continued)
Borehole continued with rock coring.

DEPTH
H

BL
O

UC
S

MO
I
S
T

Qu

(ft)

(/6")

(tsf)

(%)

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 23
STRUCTURE NO. 060–0350 (EB)

SHEET 283 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	483
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

9/13/2021 8:25:57 PM

Page 1 of 2

Date 10/16/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 23, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76192505 Long -90.16381082

COUNTY Madison **CORING METHOD** Conventional

STRUCT. NO. 060-0350 (EB) CORING BARREL TYPE & SIZE NX
Station 806+89.23

BORING NO.	<u>BB-56</u>	Top of Rock Elev.	<u>335.5</u>	ft
Station	<u>1828+83.45</u>	Begin Core Elev.	<u>333.5</u>	ft
Offset	<u>35.8 ft R (EB)</u>			

Ground Surface Elev. 414.0 ft

Limestone: Gray, moderately hard, aphanitic to very finely crystalline, banded to medium bedding, slightly to moderately weathered, dense.

Depth 83.2 feet. Dry Density: 166.9 pcf.

Depth 89.8 feet. Dry Density: 166.9 pcf.

Thin to medium bedded.

Depth 93.1 feet. Dry Density: 164.4 pcf.

Depth 97.3 feet. Dry Density: 162.5 pcf.

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)

BBS, form 138 (Rev. 8-99)

Page 2 of 2

Date 10/16/20

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 23, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76192505 Long -90.16381082

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB) CORING BARREL TYPE & SIZE
Station 806+89.23

BORING NO.	BB-56	Top of Rock Elev.	335.5	ft
Station	1828+83.45	Begin Core Elev.	333.5	ft
Offset	35.8 ft R (EB)			

Ground Surface Elev. 414.0 ft

limestone: Gray, moderately hard, aphanitic to very finely crystalline, banded to medium bedding, moderately weathered, dense, cherty

Depth 103.9 feet. Dry Density: 151.9 pcf.

Boring terminated at 104.8 feet.

Color pictures of the cores _____ Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)

BBS, form 138 (Rev. 8-99)

Page 1 of 1

Date 12/05/18

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76177512 Long -90.16290325

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.		ft	D	B	U	M	
Station	806+89.23	E	L	C	O	Stream Bed Elev.		ft	E	L	C	O	
		P	T	S	I				P	T	S	I	
		W	H	Q	T				W	H	Q	T	
BORING NO.	BB-48					Groundwater Elev.:							
Station	1831+46.47					First Encounter	406.8	ft ▼					
Offset	7.9 ft R (EB)					Upon Completion		ft					
Ground Surface Elev.	414.3	ft	(ft)	(6")	(tsf)	(%)	After	Hrs.	ft	(ft)	(6")	(tsf)	(%)

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 2 of 1

Date 12/05/18

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76177512 Long -90.16290325

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	_____	ft	D	B	U	M
Station	806+89.23	E	L	C	O	Stream Bed Elev.	_____	ft	E	L	C	O
		P	T	S	I				P	T	S	I
BORING NO.	BB-48	L	W		S	Groundwater Elev.:			L	W		S
Station	1831+46.4/	I	S	Qu	T	First Encounter	406.8	ft	I	S	Qu	T
Offset	7.9 ft (E)					Upon Completion	_____	ft				
Ground Surface Elev.	414.3	(ft)	(/6")	(tsf)	(%)	After	_____	Hrs.	(ft)	(/6")	(tsf)	(%)

Soil Description	Grain Size (mm)	Moisture (%)	Shrinkage (%)	Specific Gravity	Void Ratio	Porosity (%)	Unit Weight (pcf)	Soil Classification
Sandy Loam: Gray, fine to coarse grained, medium dense, trace fine gravel, A-1. (continued)	372.3							
Sand: Gray, fine grained, dense, A-2.	14 16 17	NC	--				18 10 9	NC --
Sand: Gray, fine to coarse grained, medium dense, A-1.	367.3							
12.6% Passing the No. 200 Sieve.	6 7 6	NC	--				12 12 13	NC --
Sand: Gray, fine grained, dense, A-2.	342.3							
Gravel: Fine grained, dense, fine to coarse, A-1.	340.0 339.8						15 15 41	NC --
Weathered Limestone: Gray.								
Sand: Gray, coarse grained, trace fine gravel, A-1.	337.3						32 13 11	NC --
	7 10 6	NC	--				14 15 100/5"	NC --

Borehole continued with rock coring.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 1 of 1

Date 12/05/18

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76177512 Long -90.16290325

COUNTY	<u>Madison</u>	CORING METHOD	<u>Conventional</u>	R		CORE	S	M
--------	----------------	---------------	---------------------	---	--	------	---	---

STRUCT. NO.	060-0350 (EB)	CORING BARREL TYPE & SIZE		Solid Barrel NX		D E E P T H (ft)	C O R E (#)	C O V E R Y (%)	J O D . (%)	T I M E (min/ft)	R E N G T H (tsf)	I S T U R E (%)
Station	806+89.23	Core Diameter	2.06	in								
BORING NO.	BB-48	Top of Rock Elev.	333.8	ft								
Station	1831+46.47	Begin Core Elev.	333.8	ft								
Offset	7.9 ft R (EB)											
Ground Surface Elev.	414.3	ft										

Limestone: Gray, hard to very hard, very finely crystalline, banded to thinly bedded, slightly weathered, dense.	333.8	1	96	26	2.1		
	-85						
Thinly to medium bedded. 3.5" Open vertical fracture.							
2" Open vertical fracture.	-90						
<u>Depth 90.15'; Dry Density: 167.5 pcf.</u>	323.8	2	0	0	3.8	745.4	0.1
No recovery.							
	-95						
Boring terminated at 95.5 feet. Boring grouted to 95.5 feet.	318.8						
	-100						

Color pictures of the cores _____ Yes _____
 Cores will be stored for examination until _____ completion _____
 The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
 BBS, form 138 (Rev. 8-99)



USER NAME	=
PLOT SCALE	=
PLOT DATE	=

DESIGNED	-
CHECKED	-
DRAWN	-
CHECKED	-

REVISED	-
REVISED	-
REVISED	-
REVISED	-

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BORING LOGS - PIER 24
STRUCTURE NO. 060-0350 (EB)

SHEET 285 OF 292 SHEETS

F.A.J. RTE.	270
----------------	-----

SECTION

COUNT

TOTAL
SHEETSSHE
NO

CONT

TRACT

NO. 7

6J90

MODEL: Default
FILE NAME: C:\ICS4PDF\9297\45087 611\060-0350-D876J90-cda-37aBOR.dgn

9/13/2021 8:28:49 PM



Illinois Department
of Transportation
Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 10/14-15/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 24 SEC. 36 TWP. 4N. RNG. 10W
Lat 38.76176476 Long -90.16320494

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23
BORING NO. BB-58
Station 1830+65.81
Offset 38.0 ft R (EB)
Ground Surface Elev. 413.2 ft

DEPTH (ft)	DIAMETER (in)	UNIT WEIGHT (pcf)	MOISTURE (%)	TESTS
2	1.7		37	
3	B/20			
4				
409.2	2	1.0	27	
3	P			
4				
3	0.5	26		
4	P			
404.2	4	NC	--	
5				
8				
402.7	6	NC	--	
7				
8				
6	NC	--		
7				
15	6	NC	--	
3				
4	NC	--		
6				
5				
5	NC	--		
7				

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

Sand: Gray, trace brown, medium dense, moist, A-1. (continued)
Grain Size Analysis performed.

Dense.

Medium dense.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department
of Transportation
Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 10/14-15/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 24 SEC. 36 TWP. 4N. RNG. 10W
Lat 38.76176476 Long -90.16320494

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23
BORING NO. BB-58
Station 1830+65.81
Offset 38.0 ft R (EB)
Ground Surface Elev. 413.2 ft

DEPTH (ft)	DIAMETER (in)	UNIT WEIGHT (pcf)	MOISTURE (%)	TESTS
6	NC	--		
5				
9				
8				
12	NC	--		
14				
4	NC	--		
6				
10				
7	NC	--		
5				
10				
10	NC	--		
14				
10	NC	--		
14				
6	NC	--		
9				
10				
14				

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

Sand: Gray, trace brown, medium dense to dense, moist, A-1. (continued)

Weathered Limestone.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department
of Transportation
Division of Highways
sci engineering inc

SOIL BORING LOG

Page 3 of 2

Date 10/14-15/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 24 SEC. 36 TWP. 4N. RNG. 10W
Lat 38.76176476 Long -90.16320494

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23
BORING NO. BB-58
Station 1830+65.81
Offset 38.0 ft R (EB)
Ground Surface Elev. 413.2 ft

DEPTH (ft)	DIAMETER (in)	UNIT WEIGHT (pcf)	MOISTURE (%)	TESTS
25	NC	--		
33				
16				
11	NC	--		
11				
12				
16	NC	--		
8				
9				

Surface Water Elev. ft
Stream Bed Elev. ft
Groundwater Elev.:
First Encounter None ft
Upon Completion ft
After Hrs. ft

Weathered Limestone.
(continued)
Borehole continued with rock coring.

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - PIER 24
STRUCTURE NO. 060-0350 (EB)

SHEET 286 OF 292 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	486
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: C:\C54PDF\929745087_609\060-0350-D876\90-cda-39aBOR.dgn
9/13/2021 8:29:32 PM



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 10/14-15/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCICOUNTY MadisonCORING METHOD Conventional

SECTION 60B-1LOCATION Pier 24, SEC. 36, TWP. 4N, RNG. 10W
Lat -38.76176476 Long -90.16320494

STRUCT. NO. 060-0350 (EB)CORING BARREL TYPE & SIZE Solid Barrel NX
Station 806+89.23

BORING NO. BB-58
Station 1830+65.81
Offset 38.0 ft R (EB)
Ground Surface Elev. 413.2 ft

Core Diameter 2.06 in
Top of Rock Elev. 334.7 ft
Begin Core Elev. 332.2 ft

DEPTH (ft)	COVER (#)	RECOVERY (%)	ROQ (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
332.2	1	100	37	2.6		
Limestone: Gray, hard, aphanitic to very finely crystalline, thin bedding, slightly to moderately weathered, dense.						
Depth 82.2 feet. Dry Density: 167.6 pcf.						
-85					674.5	0.1
-90					768.3	0.1
Depth 89.4 feet. Dry Density: 167.4 pcf.						
Banded to thinly bedded, very finely crystalline to finely crystalline.						
-95	2	100	95	2.6	508.8	0.2
Depth 93.6 feet. Dry Density: 160.2 pcf.						
-100					856.6	0.1
Depth 97.7 feet. Dry Density: 167.0 pcf.						
312.2						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



Illinois Department of Transportation

Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 10/14-15/2020

ROUTE FAI 270DESCRIPTION I-270 over the Mississippi RiverLOGGED BY SCICOUNTY MadisonCORING METHOD Conventional

SECTION 60B-1LOCATION Pier 24, SEC. 36, TWP. 4N, RNG. 10W
Lat -38.76176476 Long -90.16320494

STRUCT. NO. 060-0350 (EB)CORING BARREL TYPE & SIZE Solid Barrel NX
Station 806+89.23

BORING NO. BB-58
Station 1830+65.81
Offset 38.0 ft R (EB)
Ground Surface Elev. 413.2 ft

Core Diameter 2.06 in
Top of Rock Elev. 334.7 ft
Begin Core Elev. 332.2 ft

DEPTH (ft)	COVER (#)	RECOVERY (%)	ROQ (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
332.2	3	100	75	3	1166.2	0.1
Limestone: Gray, hard, aphanitic to very finely crystalline, thin bedding, slightly weathered, dense.						
Depth 101.6 feet. Dry Density: 167.5 pcf.						
-110					982.3	0.1
Depth 109.5 feet. Dry Density: 165.3 pcf.						
-115						
Boring terminated at 111.0 feet.						
-120						

Color pictures of the cores Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =	DESIGNED -	REVISED -
CHECKED -	REVISED -	
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 24
STRUCTURE NO. 060–0350 (EB)

SHEET 287 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	487
CONTRACT NO. 76J90				
ILLINOIS FED. AID PROJECT				

Page 1 of 3Date 9/17-18/2018

SECTION 60B-1 LOCATION East Abutment, SEC. 36, TWP. 4N, RNG. 10W

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	ft	D	B	U	M
-------------	---------------	---	---	---	---	---------------------	----	---	---	---	---

Soil Description	Moisture (%)	Plasticity Index (P)	Shrinkage (%)	Soil Description	Moisture (%)	Plasticity Index (P)	Shrinkage (%)
Clay: Brown, stiff, moist, fill, A-7.	6 7 8	4.5 P	21	Sand: Brown, fine to coarse grained, medium dense to dense, A-2. (continued) Fine grained.	6 8 10	NC	--
Silty Clay Loam: Brown and gray, medium stiff, moist, fill, A-6.	5 7 -5	4.5 P	15		6 9 10	NC	--
Clay: Brown, medium stiff, moist, fill, A-7.	3 3 3	1.6 S/15	32		9 8 8	NC	--
Silty Loam: Brown, medium stiff to stiff, moist, fill, A-4.	3 4 -10	NC	18	Sandy Loam: Brown, fine grained, medium dense to dense, A-2.	5 9 -30	NC	--
Silty Loam: Brown, medium stiff, very moist, A-4.	4 3 2	0.4 S/10	27				
Clay: Brown, medium stiff, moist, A-7.	3 2 -15	1.4 B/20	36	20.7% Finer than the No. 200 Sieve.	6 4 -35	NC	--
Sand: Brown, fine grained, very loose, moist, A-2.	3 2 1	0.5 P	--	Sand: Brown, fine grained, medium dense to dense, A-2.	10 11 12	NC	--

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 2 of 3

Date 9/17-18/2018

SECTION 60B-1 LOCATION East Abutment, SEC. 36, TWP. 4N, RNG. 10W

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	ft	D	B	U	M
-------------	---------------	---	---	---	---	---------------------	----	---	---	---	---

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 3 of 3

Date 9/17-18/2018

SECTION 60B-1 LOCATION East Abutment, SEC. 36, TWP. 4N, RNG. 10W

STRUCT. NO.	060-0350 (EB)	D	B	U	M	Surface Water Elev.	ft
-------------	---------------	---	---	---	---	---------------------	----

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



--	--

PLOT DATE	=
-----------	---

CHECKED -

CHECKED -

REVISÉ -

REVISÉ -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BORING LOGS - PIER 25
STRUCTURE NO. 060-0350 (EB)

SHEET 288 OF 292 SHEETS

RTE.
370

--	--

60B.1

	ILLIN
--	-------

MADISON

PROJECT

860

ILLINOIS	FED. AID PROJECT
----------	------------------

MODEL: Default
FILE NAME: C:\ICS4PDF\9297\45087_603\060-0350-D876J90-cda-40aBOR.dgn

9/13/2021 8:26:26 PM

MODEL: Default
FILE NAME: C:\C54PDF\929745087_610\060-0350-D876\90-cda-41aBOR.dgn

9/13/2021 8:30:35 PM



USER NAME =	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE =	DRAWN - JGS	REVISED -
PLOT DATE =	CHECKED -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS – PIER 25
STRUCTURE NO. 060–0350 (EB)

SHEET 289 OF 292 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	489
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		



Illinois Department
of Transportation
Division of Highways
sci engineering inc

SOIL BORING LOG

Page 1 of 2

Date 10/13-14/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 25, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76159593 Long -90.16259632

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-59
Station 1832+49.87
Offset 42.9 ft R (EB)
Ground Surface Elev. 412.3 ft

DEPTHS	DESCRIPTION	U.C.S.	M.O.I.S.T.	U.C.S.	M.O.I.S.T.
ft	(ft)	(/6")	(tsf)	(%)	
2	Clay: Dark brown, medium stiff to stiff, moist, fill, A-7.				
3		1.8	19		
5		B/20			
409.3					
2	Sandy Loam: Brown, medium stiff to stiff, moist, A-4.	NC	--		
3	Grain Size Analysis performed.				
5					
409.8					
3	Sand: Brown, fine-grained, medium dense to dense, moist, A-3.	NC	--		
5					
7					
5		NC	--		
6					
9					
10					
11					
30					
11					
7					
15		NC	--		
18					
35					
4		NC	--		
6					
7					
15					
4					
6		NC	--		
7					
4					
5					
6					
20					

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



Illinois Department
of Transportation
Division of Highways
sci engineering inc

SOIL BORING LOG

Page 2 of 2

Date 10/13-14/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 25, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76159593 Long -90.16259632

COUNTY Madison DRILLING METHOD CFA, Mud Rotary HAMMER TYPE Automatic

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-59
Station 1832+49.87
Offset 42.9 ft R (EB)
Ground Surface Elev. 412.3 ft

DEPTHS	DESCRIPTION	U.C.S.	M.O.I.S.T.	U.C.S.	M.O.I.S.T.
ft	(ft)	(/6")	(tsf)	(%)	
2	Sand: Gray, fine-grained, medium dense to dense, moist, A-3.				
6		NC	--		
7					
9					
16					
18					
25					
26					
29					
33					
33.8					
33.8					
50/3"		NC	--		
50/4"					
6					
17		NC	--		
50/4"					
70					
12					
14					
18		NC	--		
75					
333.8					
332.3					
332.3					
80					

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Borehole continued with rock coring.



Illinois Department
of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 1 of 2

Date 10/13-14/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 25, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76159593 Long -90.16259632

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

BORING NO. BB-59
Station 1832+49.87
Offset 42.9 ft R (EB)
Ground Surface Elev. 412.3 ft

DEPTHS	DESCRIPTION	U.C.S.	M.O.I.S.T.	U.C.S.	M.O.I.S.T.
ft	(ft)	(/6")	(tsf)	(%)	
1	Limestone: Gray, hard, very finely crystalline, thin to medium bedding, slightly weathered, dense.	83	75	1.9	
84.2	Depth 84.2 feet. Dry Density: 170.3 pcf.				621.3
86.7	Depth 86.7 feet. Dry Density: 172.8 pcf.				817.9
91.2	Depth 91.2 feet. Dry Density: 167.3 pcf.				1099.5
318.3	Void.				
315.3					
312.3	Limestone: Gray, hard, very finely crystalline, thin to medium bedding, slightly weathered, dense.				
312.3					

Color pictures of the cores Yes
Cores will be stored for examination until completion
The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)

MODEL: Default
FILE NAME: C:\CS4PDF\929745087_614\060-0350-D876\90-cda-42aBOR.dgn
9/13/2021 8:30:32 PM



Illinois Department of Transportation
Division of Highways
sci engineering inc

ROCK CORE LOG

Page 2 of 2

Date 10/13-14/2020

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION Pier 25, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76159593 Long -90.16259632

COUNTY Madison CORING METHOD Conventional

STRUCT. NO. 060-0350 (EB)
Station 806+89.23

CORING BARREL TYPE & SIZE Solid Barrel NX
Core Diameter 2.06 in
Top of Rock Elev. 333.8 ft
Begin Core Elev. 332.3 ft

BORING NO. BB-59
Station 1832+49.87
Offset 42.9 ft R (EB)
Ground Surface Elev. 412.3 ft

DEPTH (ft)	CORE (#)	RECOVERY (%)	RECOVERED (%)	CORE TIME (min/ft)	STRENGTH (tsf)	MOISTURE (%)
3	100	82	2.5			
Limestone: Gray, hard, very finely crystalline, thin to medium bedding, slightly weathered, dense.						
Depth 102.4 feet. Dry Density: 167.4 pcf.						
-105					207.7	0.1
Depth 107.0 feet. Dry Density: 169.4 pcf.						
-110					978.7	0.2
Boring terminated at 110.0 feet.						
-115						
-120						

Color pictures of the cores ☐ Yes

Cores will be stored for examination until completion

The "Strength" column represents the uniaxial compressive strength of the core sample (ASTM D-2938)
BBS, form 138 (Rev. 8-99)



USER NAME =
CHECKED -
PLOT SCALE =
PLOT DATE =

DESIGNED -
CHECKED -
DRAWN - JGS
CHECKED -

REVISED -
REVISED -
REVISED -
REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS -- PIER 25
STRUCTURE NO. 060-0350 (EB)

SHEET 290 OF 292 SHEETS

Page 1 of 2Date 09/18/18

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION East Approach, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.7612376 Long -90.16193083

COUNTY Madison DRILLING METHOD HSA HAMMER TYPE Automatic

Surface Water Elev. _____	ft	D	B	U	M
Stream Bed Elev. _____	ft	E	L	C	O
		P	O	S	I
Groundwater Elev.:		T	W		S
First Encounter _____	405.6 ft ▼	H	S	Qu	T
Upon Completion _____	ft				
After _____	Hrs. ft	(ft)	((6")	(tsf)	(%)

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 2 of 2

Date 09/18/18

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION East Approach, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.7612376 Long -90.16193083

COUNTY Madison DRILLING METHOD HSA HAMMER TYPE Automatic

Surface Water Elev. _____ ft
Stream Bed Elev. _____ ft

Groundwater Elev.:
First Encounter _____ 405.6 ft 
Upon Completion _____ ft
After _____ Hrs. _____ ft

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 1 of 1

Date 09/19/18

ROUTE FAI 270 DESCRIPTION I-270 over the Mississippi River LOGGED BY SCI

SECTION 60B-1 LOCATION East Approach, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76092513 Long -90.16052451

COUNTY Madison DRILLING METHOD HSA HAMMER TYPE Automatic

Surface Water Elev. _____ ft	D E P T H	B L O W S	U C S	M O I S T
Stream Bed Elev. _____ ft				
Groundwater Elev.: _____				
First Encounter _____ 404.0 ft 				
Upon Completion _____ ft				
After Hrs. _____ ft	(ft)	(/6")	(tsf)	(%)

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrator)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)

Page 1 of 1

Date 09/19/18

ROUTE	FAI 270	DESCRIPTION	I-270 over the Mississippi River	LOGGED BY	SCI
-------	---------	-------------	----------------------------------	-----------	-----

SECTION 60B-1 LOCATION East Approach, SEC. 36, TWP. 4N, RNG. 10W
Lat 38.76118844 Long -90.16113571

COUNTY Madison DRILLING METHOD HSA HAMMER TYPE Automatic

[illegible]

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer)
AASHTO Classifications are based on visual classifications unless otherwise noted BBS, form 137 (Rev. 8-99)



USER NAME =

DESIGNED .

CHECKED _____

PLOT SCALE = 1:1000

DRAWN

PLOT DATE =

CHECKED

REVISÉ _____

REVISÉ _____

REVISÉ

REVISÉD

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BORING LOGS - EAST ABUTMENT
STRUCTURE NO. 060-0350 (EB)

SHEET 292 OF 292 SHEETS

F.AJ RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60B-1	MADISON	860	492
		CONTRACT NO. 76J90		
ILLINOIS		FED. AID PROJECT		

MODEL: Default
FILE NAME: C:\CS4PDF\9297\45087 612\060-0350-D876J90-cda-44aBOR.dgn

9/13/2021 8:30:07 PM