 			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
F.A.	SECTION		COUNT	ΓY	TOT	AL TS	SHE
VAR.	2009-041	I	*		20	6	
STA.		TO STA.					
FED. ROAD DIST. NO.		ILLINOIS	FED.	AID	PROJ	ECT	

*COOK, DU PAGE, KANE, LAKE, MC HENRY AND WILL

SUMMARY OF QUANTITIES

URBAN INN'S TOTA

			100%. STATE	
CODE NO.	ITEM	UNIT	MAIN QUANTITY	
X0323141	SUPPLEMENTAL SWEEPING	MILE	1430	
X0329915	FULL EXPRESSWAY CLEANING CYCLE	EACH	12	
x0330600	FULL ARTERIAL CLEANING CYCLE	EACH	3	
X0414200	SIGN CLEANING CYCLE	EACH	1	
X0326643	LITTER PICKING	MILE	2145	1/1

EXPRESSWAY CLEANING SCHEDULE OF STARTING DATES - 2010

1st FULL CLEANING CYCLE ---- MARCH 1 2nd FULL CLEANING CYCLE ---- MAY 1 3rd FULL CLEANING CYCLE ---- MAY 20 4th FULL CLEANING CYCLE ---- JUNE 9 5th FULL CLEANNIG CYCLE ---- JUNE 28 6th FULL CLEANING CYCLE ---- JULY 17 7th FULL CLEANING CYCLE ---- AUGUST 5 8th FULL CLEANING CYCLE ---- AUGUST 25 9th FULL CLEANING CYCLE ---- SEPTEMBER 14 10th FULL CLEANING CYCLE ---- OCTOBER 3 11th FULL CLEANING CYCLE ---- OCTOBER 22 12th FULL CLEANING CYCLE ---- NOVEMBER 10 (RECOMMENDED TO BE COMPLETED ON OR BEFORE NOVEMBER 30)

ARTERIAL CLEANING SCHEDULE OF ANTICIPATED STARTING DATES - 2010

INITIAL CLEANING CYCLE --- MARCH 1 1st FULL CLEANING CYCLE ---- JUNE 25 2nd FULL CLEANING CYCLE ---- SEPTEMBER 12 (RECOMMENDED TO BE COMPLETED ON OR BEFORE NOVEMBER 30)

SIGN CLEANING CYCLES SCHEDULE OF STARTING DATES - 2010

---- MARCH 1 SIGN CLEANING CYCLE

- 1. SCHEDULE MAY VARY AS DIRECTED BY THE ENGINEER.
- 2. THE CONTRACTOR MAY NOT START CLEANING CYCLES BEFORE THE DATES SCHEDULED IN THE PLANS WITHOUT WRITTEN AUTHORIZATION FROM THE ENGINEER.
- 3. NO WORK WILL BE ALLOWED DURING ANY LEGAL HOLIDAY PERIOD.
- 4. ALL SCHEDULES OF ANTICIPATED STARTING DATES SHOWN ARE TENTATIVE AS DETERMINE BY THE DEPARTMENT'S OPERATIONAL NEEDS.

EXPRESSWAY CLEANING SCHEDULE OF STARTING DATES - 2011

1st FULL CLEANING CYCLE ---- MARCH 1 2nd FULL CLEANING CYCLE ---- MAY 1 3rd FULL CLEANING CYCLE ---- MAY 20 4th FULL CLEANING CYCLE ---- JUNE 9 5th FULL CLEANNIG CYCLE ---- JUNE 28 6th FULL CLEANING CYCLE ---- JULY 17 7th FULL CLEANING CYCLE ---- AUGUST 5 8th FULL CLEANING CYCLE ---- AUGUST 25 9th FULL CLEANING CYCLE ---- SEPTEMBER 14 10th FULL CLEANING CYCLE ---- OCTOBER 3 11th FULL CLEANING CYCLE ---- OCTOBER 22 12th FULL CLEANING CYCLE ---- NOVEMBER 10 (RECOMMENDED TO BE COMPLETED ON OR BEFORE NOVEMBER 30)

ARTERIAL CLEANING SCHEDULE OF ANTICIPATED STARTING DATES - 2011

INITIAL CLEANING CYCLE 1st FULL CLEANING CYCLE ---- JUNE 25 2nd FULL CLEANING CYCLE ---- SEPTEMBER 12 (RECOMMENDED TO BE COMPLETED ON OR BEFORE NOVEMBER 30)

SIGN CLEANING CYCLES SCHEDULE OF STARTING DATES - 2011

SIGN CLEANING CYCLE ---- MARCH 1

ILLINOIS DEPARTMENT OF TRANSPORTATION SUMMARY OF QUANTITIES AND SCHEDULE OF STARTING DATES

SCALE: VERT. HORIZ.

DRAWN BY CHECKED BY

1 Rev.7-21-09

*COOK, DU PAGE, KANE, LAKE, MC HENRY AND WILL

LEGEND


- 1 AREA OF ROADWAY CLEANING AND RUBBISH REMOVAL
- 2 CURB AND GUTTER
- 3 TRAVELED ROADWAY
- 4 STABILIZED SHOULDER OR MEDIAN
- 5 STEEL PLATE GUARD RAIL
- 6 CONCRETE BARRIER
- 7 NON STABILIZED SURFACE
- 8 RAISED CONCRETE MEDIAN
- 9 LITTER PICKING

NOTE: SLOPE WALLS UNDER BRIDGES ARE NOT INCLUDED IN AREAS TO BE CLEANED.


DEBRIS SHALL BE REMOVED FROM ALL STABILIZED AREAS AND UNDER ALL GUARDRAIL.


LEGEND


*: 10' (TYP.)




TYPICAL EXPRESSWAY CROSS-SECTION NO. 6

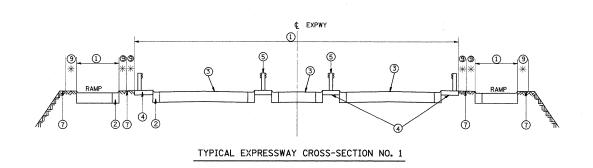

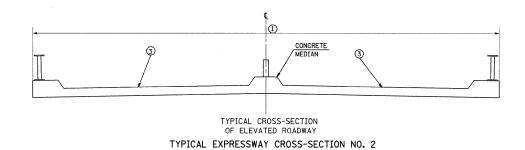



TYPICAL EXPRESSWAY CROSS-SECTION NO. 3



TYPICAL EXPRESSWAY CROSS-SECTION NO. 4 TYPICAL EXPRESSWAY CROSS-SECTION NO. 5

ILLINOIS DEPARTMENT OF TRANSPORTATION TYPICAL EXPRESSWAY CROSS-SECTIONS

SCALE: VERT.

DRAWN BY CHECKED BY

1 Rev. 1-21-09

PLOT DATE = 5/21/2009 FILE NAME = ci\pw.work\PWIDC PLOT SCALE = 52.9412 '/ IN. USER NAME = midyja

