
* (26, 26HB-1&114) R-2 CONTRACT NO. 60363

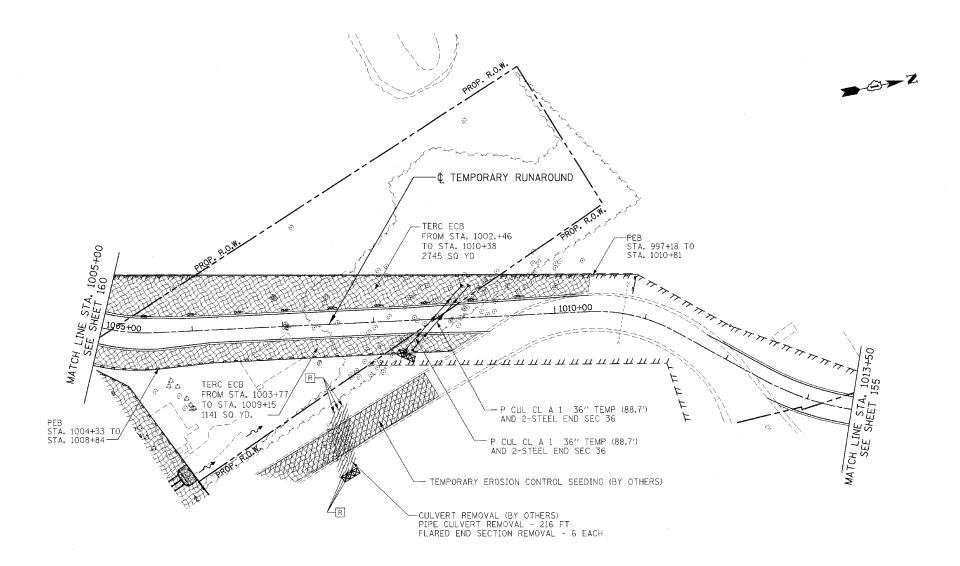

EROSION CONTROL LEGEND

SEDIMENT BASIN

SEDIMENT CONTROL, DRAINAGE STRUCTURE INLET FILTER REINFORCED INLET PROTECTION

PERIMETER EROSION BARRIER (PEB)

TEMPORARY EROSION CONTROL SEEDING AND EROSION CONTROL BLANKET (TERC ECB) SEEDING, CLASS 7 OVER WINTER STAGE

MULCH METHOD 2 AND TEMPORARY EROSION CONTROL SEEDING (MM2 & TERC)

EXISTING TEMPORARY EROSION CONTROL SEEDING AND EROSION CONTROL BLANKET (TERC ECB)

STRUCTURE REMOVAL

DDDDDD TEMP PIPE SLOPE DRAIN

TEMPORARY DITCH CHECK TEMPORARY PIPE REMOVAL

TEMPORARY PAVEMENT, UNLESS OTHERWISE NOTED PAVEMENT REMOVAL, UNLESS OTHERWISE NOTED

NOTES:

AGGREGATE (EROSION CONTROL) 1. FOR PERMANENT DRAINAGE STRUCTURE AND PIPE TFMP PIPE SLOPE DRAIN INFORMATION SEE SHEETS 216 TO 221

2. PER STANDARD 2800001, ALL SEDIMENT BASINS TO BE PLACED AS SHOWN AND REMOVED AT THE END OF THE PROJECT. THE COST WILL BE INCLUDED IN THE CONTRACT UNIT PRICE BID PER CUBIC YARD FOR "EARTH EXCAVATION FOR EROSION CONTROL".

3. AGGREGATE EROSION CONTROL IS NOT REQUIRED FOR SEDIMENT BASINS WHERE THESE DISCHARGE TO STONE RIPRAP.

4. LATERAL SEWER PIPE TO MAINLINE SEWER SHALL HAVE THEIR UPSTREAM ENDS TEMPORARILY PLUGGED ACCORDING TO DETAILS OF SHEET 410, OR AS DIRECTED BY THE ENGINEER. PLUG WILL BE REMOVED UPON CONSTRUCTION OF REMAINING LATERAL PIPE, AS DIRECTED BY THE ENGINEER. COST OF TEMPORARY PLUG AND SUBSEQUENT REMOVAL FOR LATERAL STORM SEWER CONNECTIONS WILL NOT BE PAID FOR SEPARATELY, BUT WILL BE INCLUDED IN THE CONTRACT UNIT PRICE BID PER FOOT FOR STORM SEWERS, OF THE CLASS AND TYPE SPECIFIED.

		ILLINOIS DEPARTMENT OF TRANSPORTATION
		FAI 55 AT FAP 338 ILLINOIS ROUTE 59
REVISIONS		SECTION: (26, 26HB-1&114) R-2
NAME	DATE	SECTION (20, 2016 INITY) IV 2
		FROSTON CONTROL
		PRE STAGE A & B
		STA. 1005+00 TO STA. 1013+50

SCALE: 1"=50" DATE: 03/14/08 DRAWN BY: MRK CHECKED BY: TKL

TENG