
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

EXISTING DECK BEAM

ROUTE NO.	SECTION	POPE		TOTAL. SHEETS	SHEET NO.	SHEET NO. 4		4
F.A.P. 885	IIIBR-I			69	15			;
FED. ROAD DIST. NO. 7		ILLINOIS	PED. AID PROJECT-					

Contract #78033

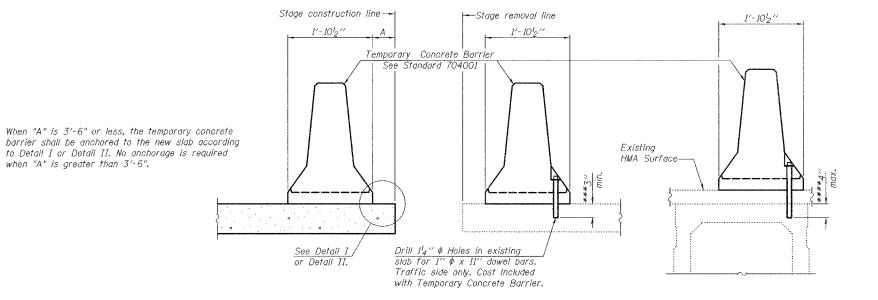

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel $\mathbb R$ to the top layer of couplers with $2^{-5}8$ " ϕ bolts screwed to coupler at approximate € of each barrier panel.

Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x10" steel 12 to the concrete slab or concrete wearing surface with 2-58" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate © of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready

See Roadway Plans for quantity of Temporary Concrete Barrier.

SECTIONS THRU SLAB OR DECK BEAM


EXISTING SLAB

***Dimension shown is minimum required embedment into concrete.

If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.


*****If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not

into existing deck beam concrete.

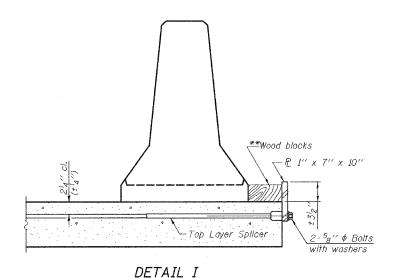

NEW SLAB

**Wood blocks Extended #4 bars \#4 bars 2-5₈" ∮ Expansion Anchors or cast in place inserts with a certified min. proof load of DETAIL II 5,000 Lbs.



STEEL RETAINER P 1" x 7" x 10" * Required only with Detail II

**Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION ILL. ROUTE 146 OVER SUGAR CREEK F.A.P. ROUTE 885 - SECTION 111BR-1 POPE COUNTY STATION 671+76.00 STRUCTURE NO. 076-0006

Consulting Engineers

DESIGNED YSS CHECKED RLM DRAWN PRC CHECKED YSS

03/18/08