

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 BRIDGE REPAIRS 2026	*	4	1
		ILLINOIS	CONTRACT NO. 76U44	
*MADISON, MONROE, ST. CLAIR				

D-98-039-25

FOR INDEX OF SHEETS, SEE SHEET NO. 2

PROPOSED  
HIGHWAY PLANS

VARIOUS ROUTES  
DIST 8 BRIDGE REPAIRS 2026


BRIDGE REPAIRS

VARIOUS COUNTIES  
(MADISON, MONROE, ST. CLAIR)

C-98-097-25




LOCATION OF SECTION INDICATED THUS: -

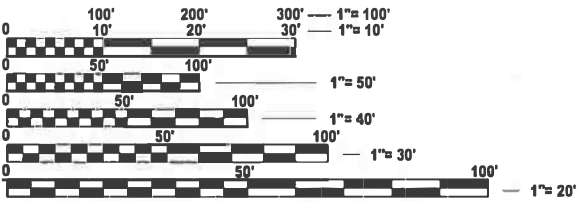

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD  
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT  
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS  
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123  
OR 811

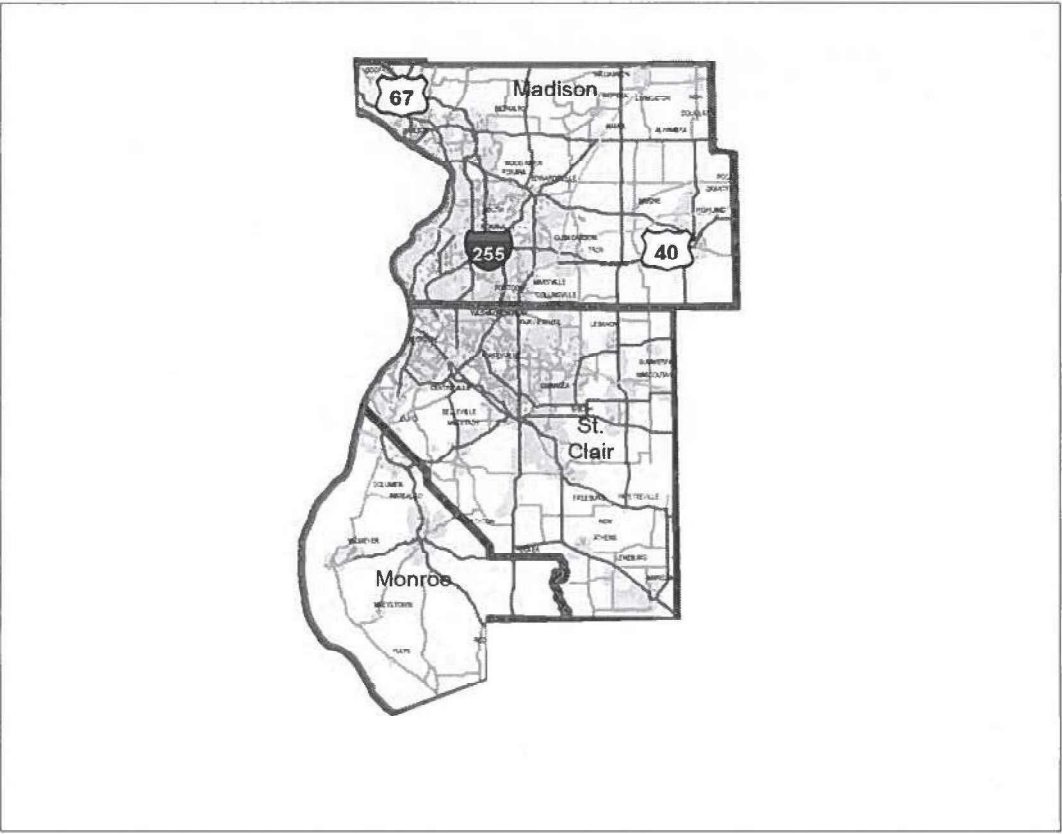

PROJECT ENGINEER : BILLIE OWEN  
PROJECT MANAGER : MIKE BERG

CONTRACT NO. 76U44

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SUBMITTED *[Signature]* 20 25  
*[Signature]* DEPUTY ENGINEER  
June 27 20 25  
*[Signature]* ENGINEER OF DESIGN AND ENVIRONMENT  
June 27 20 25  
*[Signature]* 5  
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS

## INDEX OF SHEETS

1. COVER SHEET
2. INDEX OF SHEETS, STANDARDS, GENERAL NOTES, AND COMMITMENTS
3. SUMMARY OF QUANTITIES
4. DETAILS

## COMMITMENTS

NO COMMITMENTS

## STANDARDS

000001-08	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001001-02	AREAS OF REINFORCEMENT BARS
001006	DECIMAL OF AN INCH AND OF A FOOT
701201-05	LANE CLOSURE, 2L 2W, DAY ONLY 45MPH OR MORE
701400-12	APPROACH TO LANE CLOSURE FREEWAY EXPRESSWAY
701401-13	LANE CLOSURE FREEWAY EXPRESSWAY
701411-09	LANE CLOSURE MULTILANE ENTRANCE OR EXIT RAMP 45MPH OR MORE
701428-01	TRAFFIC CONTROL SETUP REMOVAL FREEWAY EXPRESSWAY
701446-11	TWO LANE CLOSURE FREEWAY EXPRESSWAY
701901-10	TRAFFIC CONTROL DEVICES

## GENERAL NOTES

1. NO SURVEY OF THIS PROJECT AND THE PLANS WERE CREATED USING MICROFILM AND FIELD MEASUREMENTS.
2. THE RESIDENT ENGINEER SHALL VERIFY THE EXISTENCE OF HIGHWAY LIGHTING, INTELLIGENT TRANSPORTATION SYSTEMS (I.T.S.) UTILITIES, AND/OR ELECTRICAL CABLES ASSOCIATED WITH TRAFFIC SIGNALS WITHIN THE PROJECT LIMITS. IF ANY OF THESE EXIST WITHIN THE PROJECT LIMITS, AND IF THESE ITEMS REQUIRE LOCATING, THE CONTRACTOR SHALL BE DIRECTED TO DO SO ACCORDING TO SECTION 803 OF THE STANDARD SPECIFICATIONS. THIS WORK SHALL BE PAID FOR ACCORDING TO ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS.
3. THE DEPARTMENT STRONGLY ENCOURAGES THE PRIME CONTRACTOR AND THEIR APPROVED SUB-CONTRACTORS TO HIRE MINORITY, WOMEN AND DISADVANTAGED INDIVIDUALS FROM ITS FEDERALLY FUNDED HIGHWAY CONSTRUCTION CAREERS TRAINING PROGRAM (HCCTP) TO HELP MEET WORKFORCE AND TRAINEE GOALS. THIS PROGRAM IS TRAINING MINORITIES, WOMEN AND DISADVANTAGED INDIVIDUALS IN HIGHWAY CONSTRUCTION-RELATED SKILLS, E.G., MATH FOR THE TRADES, JOB READINESS, TECHNICAL SKILLS COURSEWORK (CARPENTRY, CONCRETE FLATWORK, BLUEPRINT READING, SITE PLANS, SITE WORK, TOOLS USE, ETC.) AND OSHA 10 HOUR CERTIFICATION, TO PREPARE THEM FOR A CAREER IN THE HIGHWAY CONSTRUCTION TRADES. GRADUATES ARE WELL-TRAINED AND READY TO BECOME PRODUCTIVE ENTRY-LEVEL CONSTRUCTION WORKERS. CONTACT THE DISTRICT 8 EEO OFFICE AT 618-346-3360 AND/OR THE HCCTP COORDINATOR AT 618-874-6528 TO LEARN MORE ABOUT THE PROGRAM AND FOR ASSISTANCE IN MEETING WORKFORCE AND TRAINEE GOALS.
4. ALL TURF AREAS DISTURBED BY THE CONTRACTOR SHALL BE SEEDED, WITH THE APPROPRIATE EROSION CONTROL, AS DIRECTED BY THE ENGINEER, AT THE CONTRACTOR'S EXPENSE.

REV - MS

FILE NAME:	USER NAME = Robert.Hughes	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, STANDARDS, GENERAL NOTES AND COMMITMENTS	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN -	REVISED -			VAR	DIST 8 BRIDGE REPAIRS 2026	*	4	2	
		CHECKED -	REVISED -			*MADISON, MONROE, ST. CLAIR		CONTRACT NO. 76U44			
	PLOT DATE = 5/13/2025	DATE -	REVISED -			ILLINOIS					
						SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.

MODEL: Summary of Quantities [Sheet]  
FILE NAME: c:\p\work\p\robert.hughes@illinois.gov\1093137\0876\44-shl-SOO.dgn







100% STATE

				CONSTR. CODE
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	BRIDGE
				0013 URBAN
70100205	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	EACH	40	40
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	15	15
70100430	TRAFFIC CONTROL AND PROTECTION, STANDARD 701446	EACH	15	15
X7010101	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201 (SPECIAL)	EACH	15	15
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	550	550
X5051204	STRUCTURAL STEEL REMOVAL	POUND	3000	3000
X5051206	STRUCTURAL STEEL REPAIR	POUND	12000	12000
Z0008759	CALL OUT	EACH	55	55
Z0016200	DECK SLAB REPAIR (PARTIAL)	SQ YD	100	100
Z0021920	SILICONE JOINT SEALER (SPECIAL)	FOOT	5000	5000
Z0041895	POLYMER CONCRETE	CU FT	150	150

REV - MS

	USER NAME = Robert.Hughes	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	DIST 8 BRIDGE REPAIRS 2026	*	4	3
		CHECKED -	REVISED -					* MADISON, MONROE, ST. CLAIR		CONTRACT NO. 76U44		
	PLOT DATE = 5/15/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 1 SHEETS	STA.	TO STA.	ILLINOIS		

JOINT OPENINGS ALONG THE DIRECTION OF TRAFFIC  
CAN NOT EXCEED 4".

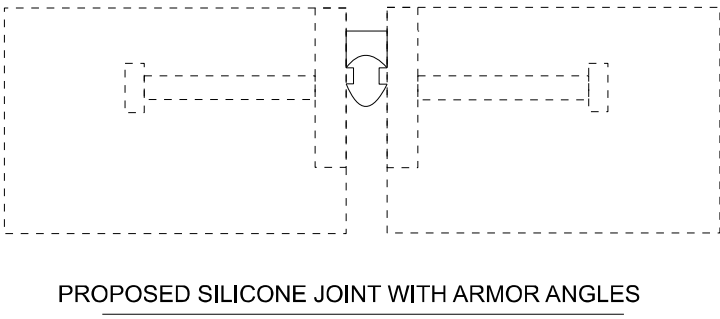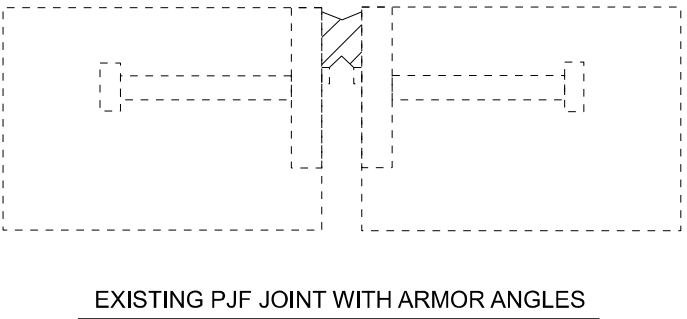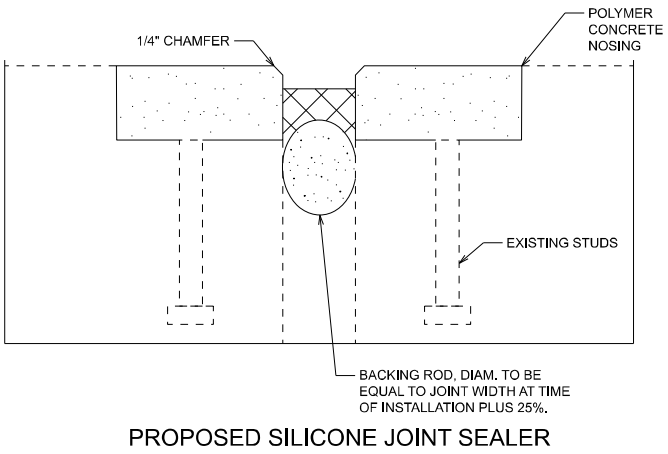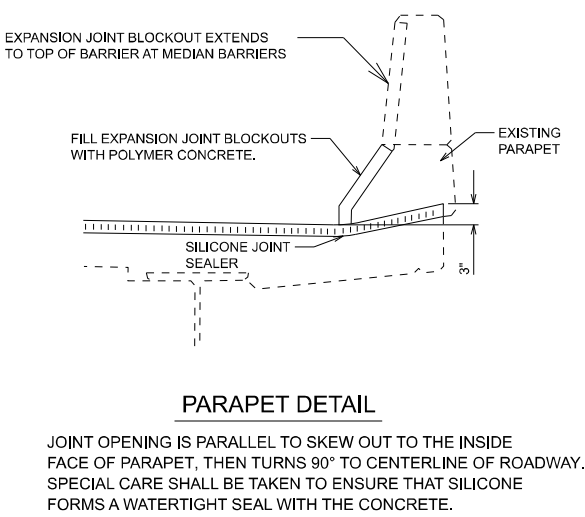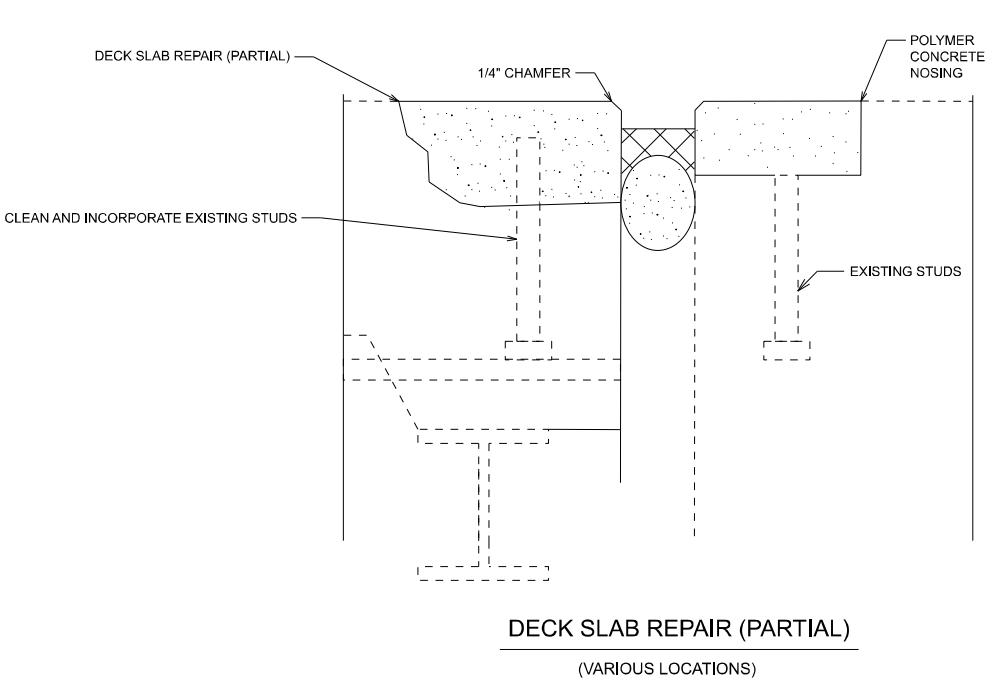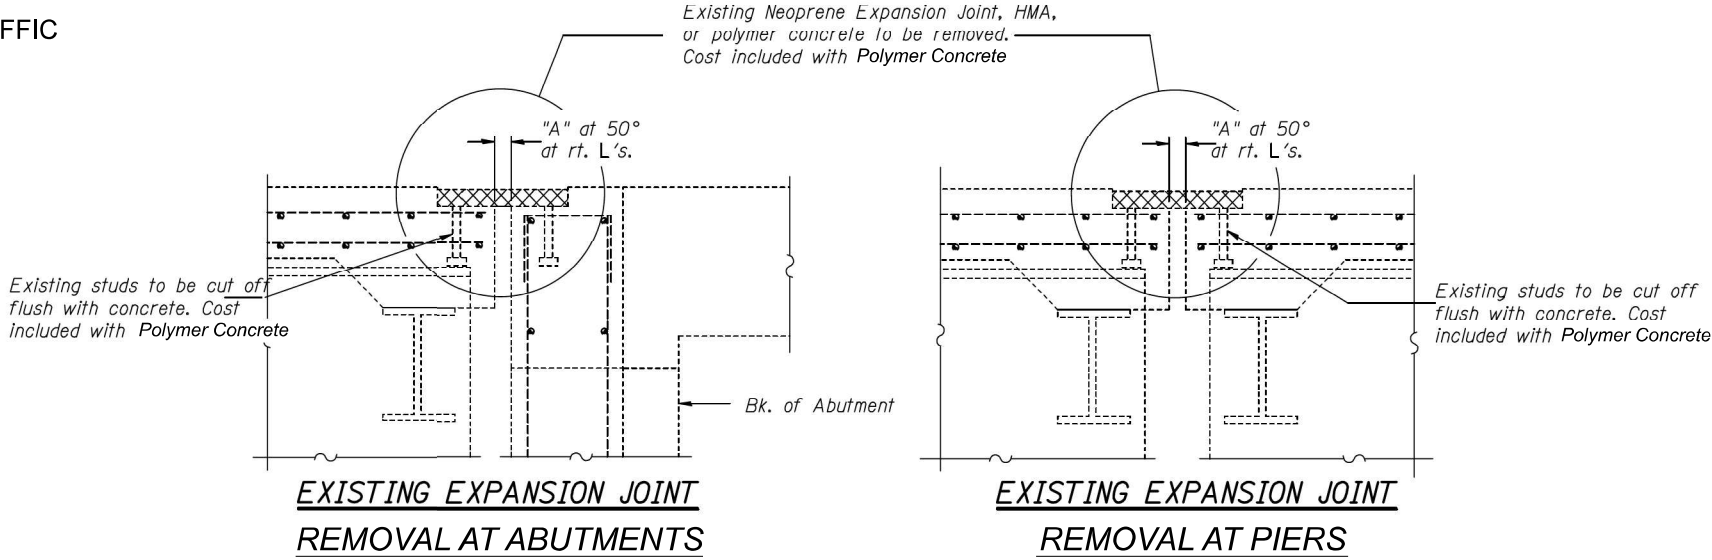

MODEL: Details 1 [Sheet]  
FILE NAME: c:\p\work\dwg\robert.hughes@illinois.gov\1093137\B876\444-sh-detailed.dgn

USER NAME	= Robert,Hughes	DESIGNED	-	REVISED	-
		DRAWN	-	REVISED	-
		CHECKED	-	REVISED	-
PLOT DATE	= 5/15/2025	DATE	-	REVISED	-

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

DETAILS

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 BRIDGE REPAIRS 2026	*	4	4
*MADISON, MONROE, ST. CLAIR		CONTRACT NO. 76U44		
ILLINOIS				