

Notes:

All cast iron parts shall be gray iron conforming to the requirements of AASHTO M 105, Class 35B.

Bolts, anchor studs, washers and nuts shall conform to the requirements of ASTM A 307 and shall be galvanized according to AASHTO M 232.

Downspouts located on the exterior side of a painted steel fascia beam shall be painted with the finish coat specified for the exterior side of the fascia beam.


As an alternate, bolts, anchor studs, washers and nuts may be stainless steel according to Article 1006.29(d) of the Standard Specifications.

Structural steel weldments of equal sections and of the same configuration may be substituted for the cast iron scupper frame. Fillet or full penetration welds shall be used for the weldments. Details shall be submitted to the Engineer for approval. Structural steel weldments shall not be substituted for the cast iron scupper grate. Structural steel frames and downspouts shall be galvanized according to AASHTO M111.

The Contractor shall take appropriate measures to assure that Protective Coat is not applied to the scupper.

Cost of the Grate, Frame, Downspout, Anchor Studs, Bolts, Washers and Nuts including complete installation of the scupper shall be paid for at the contract unit price each for Drainage Scupper, DS-11.

Alternate fiberglass downspout conforming to ASTM D 2996 with a short-time rupture strength hoop tensile stress of 30,000 psi min. may be used in lieu of the cast iron or steel equivalent.

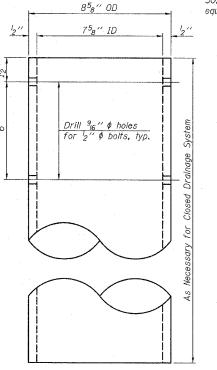

2"

## ANCHOR STUD DETAIL

## BILL OF MATERIAL

ITEM	UNIT	QUANTITY
Drainage Scupper, DS-11	Each	24
		*

SHEET S-37 OF S-53

ILLINOIS DEPARTMENT OF TE	REVISIONS
TE ILLINOIS DEPARTMENT OF IT	NAME DATE
DRAINAGE SCUPPER	
ILLINOIS 60 OVE	
F.A.P. RTE. 335 SECTI	
LAKE COUNTY STA	
S.N. 049-2012 ISTHA B	
DESI	
SCALE: DRAW	
DATE: MAY 8, 2007 CHEC	

5° Draft typ. 5° Draft 10° Draft

typ.

4 locations

7/2"

SECTION A-A

Drill and tap  ${}^{l_2}$ "-13 $x^3$ 4" DP. for  ${}^{l_2}$ "  $\phi$  Anchor Studs

 $B \blacktriangleleft^{\downarrow}$ 

PLAN

1'-5'8"

1'-44"

1'-4"


♣\_\_

Drill and tap scupper for 4  $l_2$ "  $\phi$  stainless steel hexagon

head bolts with lock washers

VANE GRATE DETAIL



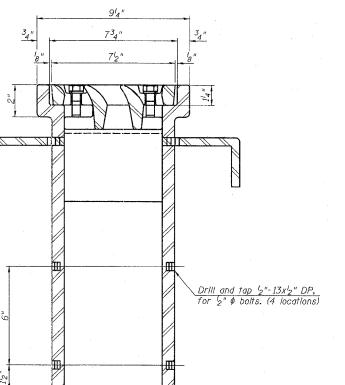

34" 71/2"

SECTION B-B

Note B: Temporary Steel Plate will be installed in lieu of scupper grate during Stage II Construction. Cost included with Drainage Scuppers, DS-II.

TYLININTERNATIONAL

BOLT HOLE DETAIL

**DOWNSPOUT** 

**TRANSPORTATION** R, DS-11

ER I-94 TION 119R-2 4. 445+54.14 BRIDGE NO. 407 SIGNED BY: SP

AWN BY: SP ECKED BY: PF