
| CONTRACT NO. 70585
| SECTION | COUNTY | TOTAL SHEET NO. |
| 121BR | VERMILION | /3A F.A.P. SECTION 840 121BR

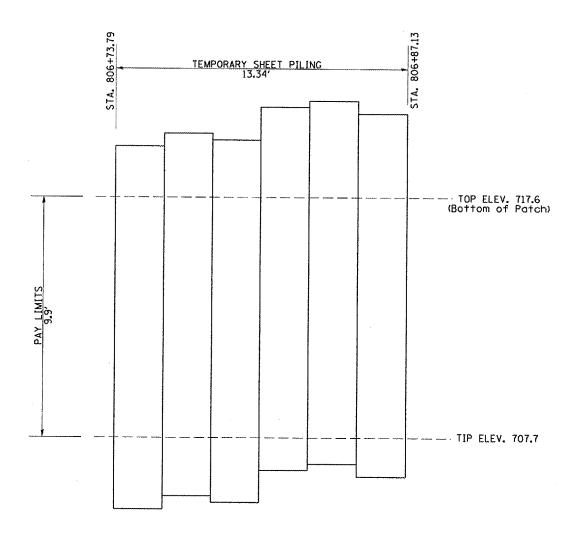

TABULATION OF PAY LIMITS

STA "A"	OFFSET FT, (m)	STA "B"	OFFSET FT. (m)	TOP ELEV.	TIP ELEV.	QUANTITY SO.FT. (m 2)
806+73.79		806+87.13		717.6	707.7	132.1

NOTES:

PAYMENT WILL BE MADE ONLY FOR TEMPORARY SHEET PILING WITHIN THE LIMITS SHOWN ABOVE.

THE TOP ELEV. IS BASED ON THE GROUND LEVEL TO BE MAINTAINED BEHIND THE TEMPORARY SHEET PILING.

THE TIP ELEV. IS BASED ON THE SOIL BORINGS AND THE RECOM-MENDATIONS OF THE DISTRICT MATERIALS ENGINEER.

THE TOP ELEV., TIP ELEV., AND LIMITS OF SHEET PILING ARE SUBJECT TO CHANGES BASED ON APPROVED SHOP DRAWINGS.

HARD DRIVING MAY BE ENCOUNTERED DURING THE SHEET PILING INSTALLATION. THE CONTRACTOR SHALL PROVIDE THE APPROPRIATE DRIVING EQUIPMENT FOR THE SOIL CONDITIONS INDICATED ON THE BORING LOGS.

IF THE CONTRACTOR CHOOSES TO ALTER THE TEMPORARY CANTILEVERED SHEET PILING DESIGN REQUIREMENTS. THEN FULL DESIGN SUBMITTALS WITH THE REQUIRED SEALS WILL BE EXPECTED BY THE DEPARTMENT, FOR REVIEW AND APPROVAL.

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

	REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION			
	NAME	DATE	TELINOIS DEL VICINEILI	OF TRANSFORTATION		
			TEMPORARY SHEET PILING			
			DETAIL			
			SCALE: VERT. NOT TO SCALE DATE	DRAWN BY CHECKEO BY		