



Illinois Department of Transportation

Division of Aeronautics

1 Langhorne Bond Drive / Capital Airport / Springfield, Illinois / 62707-8415

July 17, 2018

SUBJECT: Pekin Municipal Airport
Pekin, Illinois
Tazewell County
Illinois Project Number: C15-4685
SBG Project Number: 3-17-SBGP-133/TBD
Contract No. PN011
Item No. 2A, August 3, 2018 Letting
Addendum A

NOTICE TO PROSPECTIVE BIDDERS

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

Reason for Addendum:

Revision to Item 800505 Longitudinal Joint Sealant application and quantity.

To All Plan Holders:

Plan Changes:

Sheet 02 and 08.

Special Provisions Changes:

None.

Prime contractors must utilize the enclosed material when preparing their bid and must include any Schedule of Prices changes in their bidding proposal.

Bidders using computer-generated bids are cautioned to reflect any and all Schedule of Prices changes, if involved, into their computer programs.

Questions on this addendum may be directed to Lindsay Hausman of Hanson Professional Services at 217.747.9314.



INDEX OF SHEETS	
SHEET NO.	TITLE
1	COVER SHEET
2	SHEET INDEX AND SUMMARY OF QUANTITIES
3	SITE AND SAFETY PLAN
4	CONSTRUCTION SITE AND SAFETY PLAN NOTES
5	CONSTRUCTION SAFETY NOTES
6	CONSTRUCTION SAFETY DETAILS
7	ALIGNMENT DATA TABLE
8	TYPICAL SECTIONS AND PAVEMENT DETAILS
9	STORMWATER POLLUTION PREVENTION PLAN
10	SWPPP DETAILS
11	REMOVAL PLAN 1
12	REMOVAL PLAN 2
13	REMOVAL PLAN 3
14	REMOVAL PLAN 4
15	MILLING GRADING PLAN
16	CRACK REPAIR PLAN
17	PLAN & PROFILE - RUNWAY 9-27 - STA. 100+00 - 105+43
18	PLAN & PROFILE - RUNWAY 9-27 - STA. 105+43 - 110+85
19	PLAN & PROFILE - RUNWAY 9-27 - STA. 110+85 - 116+28
20	PLAN & PROFILE - RUNWAY 9-27 - STA. 116+28 - 121+70
21	PLAN & PROFILE - RUNWAY 9-27 - STA. 121+70 - 127+13
22	PLAN & PROFILE - RUNWAY 9-27 - STA. 127+13 - 132+56
23	PLAN & PROFILE - RUNWAY 9-27 - STA. 132+56 - 137+98
24	PLAN & PROFILE - RUNWAY 9-27 - STA. 137+98 - 143+41
25	PLAN & PROFILE - RUNWAY 9-27 - STA. 143+41 - 148+83
26	PLAN & PROFILE - RUNWAY 9-27 - STA. 148+83 - 150+00
27	PLAN & PROFILE - TURNAROUND - STA. 10+00 - 15+43
28	PLAN & PROFILE - TURNAROUND - STA. 15+43 - 16+69
29	CROSS SECTIONS - RUNWAY 9-27 - STA. 100+00 - 104+00
30	CROSS SECTIONS - RUNWAY 9-27 - STA. 104+50 - 108+50
31	CROSS SECTIONS - RUNWAY 9-27 - STA. 109+00 - 113+00
32	CROSS SECTIONS - RUNWAY 9-27 - STA. 113+50 - 117+50
33	CROSS SECTIONS - RUNWAY 9-27 - STA. 118+00 - 122+00
34	CROSS SECTIONS - RUNWAY 9-27 - STA. 122+50 - 126+50
35	CROSS SECTIONS - RUNWAY 9-27 - STA. 127+00 - 131+00
36	CROSS SECTIONS - RUNWAY 9-27 - STA. 131+50 - 135+50
37	CROSS SECTIONS - RUNWAY 9-27 - STA. 136+00 - 140+00
38	CROSS SECTIONS - RUNWAY 9-27 - STA. 140+50 - 144+50
39	CROSS SECTIONS - RUNWAY 9-27 - STA. 145+00 - 149+00
40	CROSS SECTIONS - RUNWAY 9-27 - STA. 149+50 - 150+00
41	CROSS SECTIONS - TURNAROUND - STA. 10+38 - 14+00
42	CROSS SECTIONS - TURNAROUND - STA. 14+50 - 16+16
43	MARKING PLAN 1
44	MARKING PLAN 2
45	MARKING PLAN 3
46	LANDSCAPING PLAN

SUMMARY OF QUANTITIES			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
AR150510	ENGINEER'S FIELD OFFICE	LUMP SUM	1.00
AR150520	MOBILIZATION	LUMP SUM	1.00
AR150530	TRAFFIC MAINTENANCE	LUMP SUM	1.00
AR152410	UNCLASSIFIED EXCAVATION	CUBIC YARD	10,876.00
AR152480	SHOULDER ADJUSTMENT	SQUARE YARD	6,024.00
AR154606	GRANULAR DRAINAGE SUBBASE - 6"	SQUARE YARD	32,490.00
AR156510	SILT FENCE	LINEAR FOOT	320.00
AR156513	SEPARATION FABRIC	SQUARE YARD	32,490.00
AR201661	CLEAN & SEAL BITUMINOUS CRACKS	LINEAR FOOT	1,013.00
AR201662	BITUMINOUS SAND MIX	SQUARE YARD	76.00
AR201663	SAND MIX CRACK REPAIR	LINEAR FOOT	1,013.00
AR201670	CRACK CONTROL FABRIC	SQUARE YARD	113.00
AR209604	CRUSHED AGG. BASE COURSE - 4"	SQUARE YARD	32,490.00
AR401614	BIT. SURF. CSE. - METHOD II, SUPERPAVE	TON	5,385.00
AR401630	BITUMINOUS SURFACE TEST SECTION	EACH	1.00
AR401650	BITUMINOUS PAVEMENT MILLING	SQUARE YARD	13,082.00
AR401660	SAW & SEAL BIT. JOINTS	LINEAR FOOT	220.00
AR401665	BITUMINOUS PAVEMENT SAWING	LINEAR FOOT	1,064.00
AR401910	REMOVE & REPLACE BIT. PAVEMENT	SQUARE YARD	12.00
AR403614	BIT. BASE CSE. - METHOD II, SUPERPAVE	TON	3,817.00
AR403630	BITUMINOUS BASE TEST SECTION	EACH	1.00
AR602510	BITUMINOUS PRIME COAT	GALLON	9,500.00
AR603510	BITUMINOUS TACK COAT	GALLON	6,713.00
AR620520	PAVEMENT MARKING-WATERBORNE	SQUARE FOOT	27,825.00
AR620525	PAVEMENT MARKING-BLACK BORDER	SQUARE FOOT	8,368.00
AR800502	FULL DEPTH BIT. PAVEMENT MILLING	SQUARE YARD	31,713.00
AR800505	LONGITUDINAL JOINT SEALANT	LINEAR FOOT	15,579.00
AR800509	MILLINGS SUBBASE, 7.5. IN.	SQUARE YARD	32,490.00
AR901510	SEEDING	ACRE	1.25
AR908510	MULCHING	ACRE	1.25



**RECONSTRUCT
RUNWAY 9-27
INCLUDING
TURNAROUND
PAVEMENT**

IDA No: C15-4685
SBGP No:
3-17-SBGP-133/TBD

Contract No.: PN011

NO.	DATE	DESCRIPTION		
		LAY	DWN	REV
A	7/17/18	LJS Application		
		LDH	LDH	RAW

ISSUE: JUNE 8, 2018

PROJECT NO: 18A0007
CAD FILE: 02-SOQ.DWG
LAYOUT BY: LDH 5/12/18
DRAWN BY: LDH 5/12/18
REVIEWED BY: KMS 5/16/18

© Copyright Hanson Professional Services Inc. 2013

SHEET TITLE

**SHEET INDEX AND
SUMMARY OF
QUANTITIES**



**RECONSTRUCT
RUNWAY 9-27
INCLUDING
TURNAROUND
PAVEMENT**

IDA No: C15-4685
SBGP No:
3-17-SBGP-133/TBD

Contract No.: PN011


NO.	DATE	DESCRIPTION
A	7/17/18	LJS Application LDH LDH RAW
		LAY DWN REV

ISSUE: JUNE 8, 2018
PROJECT NO: 18A0007
CAD FILE: 08-TYP.DWG
LAYOUT BY: LDH 5/12/18
DRAWN BY: LDH 5/12/18
REVIEWED BY: KMS 5/16/18

© Copyright Hanson Professional Services Inc. 2013

SHEET TITLE


**TYPICAL SECTIONS
AND PAVEMENT
DETAILS**

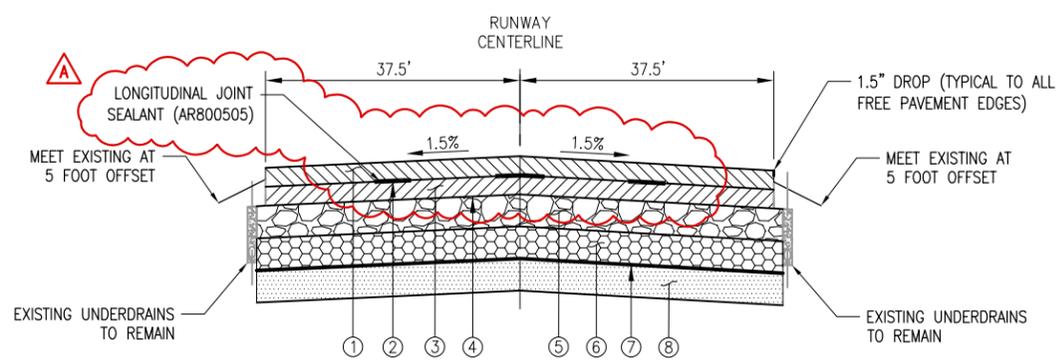

TYPICAL SECTION A-A - RUNWAY 9-27

(SECTION SHOWN LOOKING EAST)


- ① PROPOSED 2 INCH BITUMINOUS SURFACE COURSE, ITEM AR401614
- ② PROPOSED BITUMINOUS TACK COAT, ITEM AR603510
- ③ PROPOSED 2 INCH BITUMINOUS BASE COURSE, ITEM AR4031614
- ④ PROPOSED BITUMINOUS PRIME COAT, ITEM AR602510
- ⑤ PROPOSED 4 INCH AGGREGATE BASE COURSE, ITEM AR209604
- ⑥ PROPOSED 6 INCH GRANULAR DRAINAGE SUBBASE, ITEM AR154606
- ⑦ PROPOSED SEPARATION FABRIC, ITEM AR156513
- ⑧ PROPOSED 7.5 INCH MILLINGS SUBBASE, AR800509

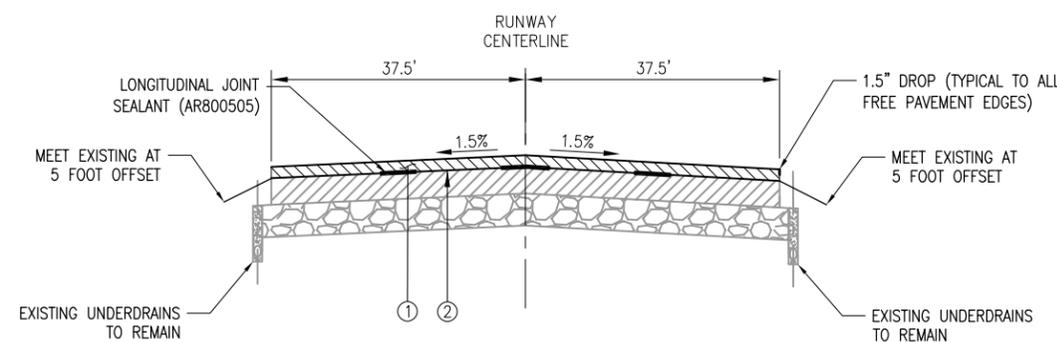

TYPICAL SECTION B-B - RUNWAY 9-27

(SECTION SHOWN LOOKING EAST)


- ① PROPOSED 2 INCH NOMINAL DEPTH MILLING AND 2 INCH BITUMINOUS SURFACE COURSE, ITEM AR401650 AND AR401614
- ② PROPOSED BITUMINOUS TACK COAT, ITEM AR603510

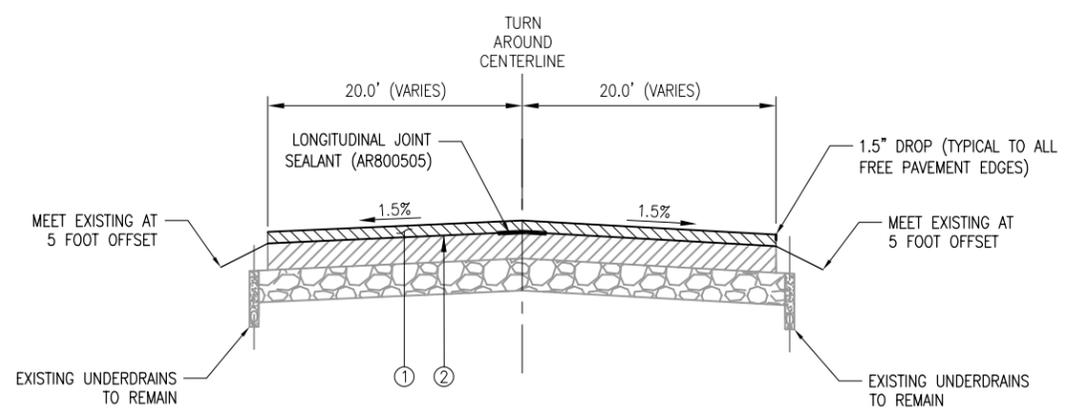

- ① PROPOSED 2 INCH NOMINAL DEPTH MILLING AND 2 INCH BITUMINOUS SURFACE COURSE, ITEM AR401650 AND AR401614
- ② PROPOSED BITUMINOUS TACK COAT, ITEM AR603510


TYPICAL SECTION C-C - TURN-AROUND

(SECTION SHOWN LOOKING NORTH)

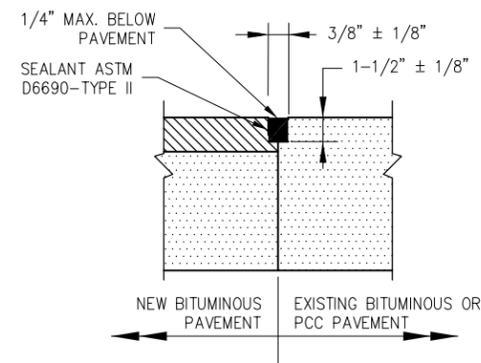

NOTE:
ALL BITUMINOUS/BITUMINOUS JOINT SEALING TO BE PAID UNDER SAW AND SEAL BITUMINOUS JOINTS, ITEM AR401660.

BITUMINOUS/BITUMINOUS SEAL

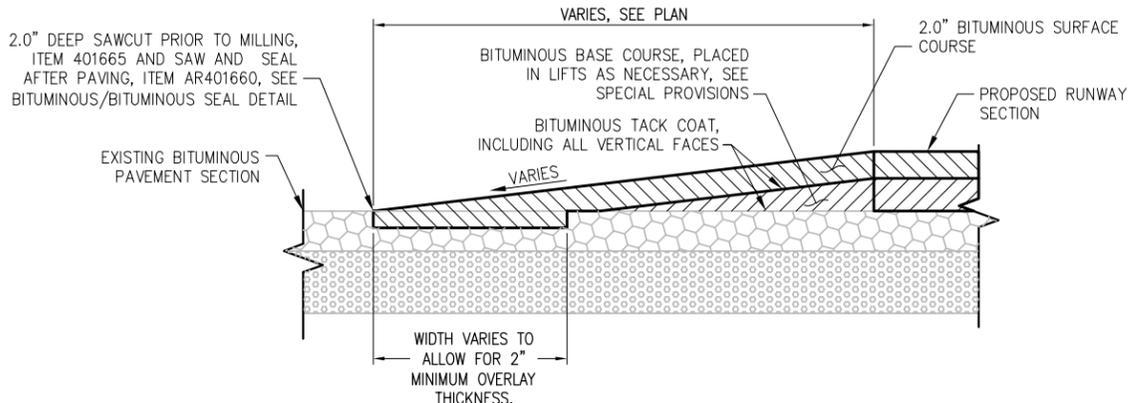

BITUMINOUS TAPER DETAIL