



OPTION 1

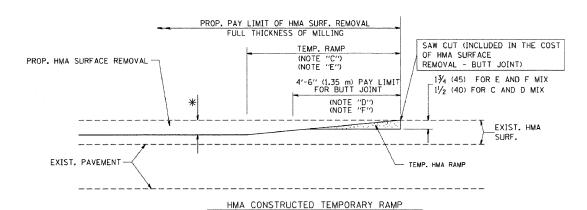


OPTION 2 TYPICAL TEMPORARY RAMP


(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

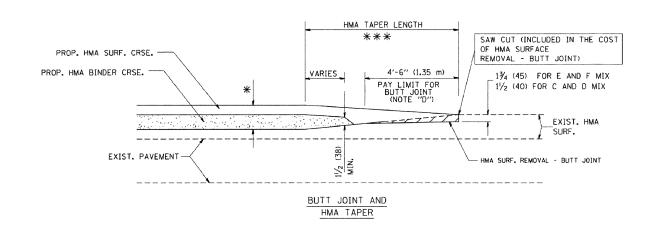

TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

BUTT JOINT AND HMA TAPER DETAILS

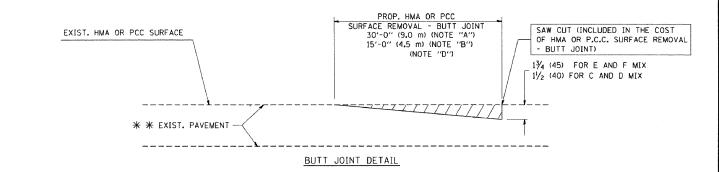

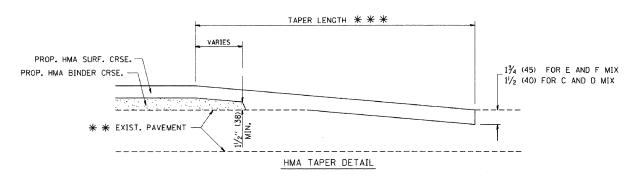

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

 $***$ PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL - BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.
- ** ** 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A") 10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS

COOK

33 CONTRACT NO. 60F91

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

SCALE: NONE

	USER NAME = \$USER\$	DESIGNED - MJY		
		DRAWN - RJG	REVISED -	STATE O
CONSULTING ENGINEERS 1560 WALL ST. SUITE 222	PLOT SCALE = \$SCALE\$	CHECKED - MJY	REVISED -	DEPARTMENT OF
NAPERVILLE, ILLINOIS 60563 PH ₂ (630) 577-9100	PLOT DATE = \$DATE\$	DATE - 07/08/2009	REVISED -	

STATE	OF	ILLINOIS
DEPARTMENT	0F	TRANSPORTATION

DISTRICT ONE DETAIL SHEETS	RTE. SECTION	
IL ROUTE 58 (GOLF ROAD)	1320 581 B-1	
IE HOOTE 30 (GOEL HOAD)	D-91-288-09	_
SHEET NO. 28 OF 33 SHEETS STA. 492+55 TO STA. 498+4	45 FED. ROAD DIST. NO. ILLINOIS FED. AID	D