2 GENERAL NOTES & SUMMARY OF QUANTITIES & SCHEDULE OF QUANTITIES

ROADWAY PLAN - GARFIELD STREET

CONSTRUCTION DETAILS

## LIST OF STATE STANDARDS

442201-03 CLASS C AND D PATCHES

606001-04 CONCRETE CURB TYPE B COMBINATION CONCRETE CURB AND GUTTER

701501-05 URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED

701901-01 TRAFFIC CONTROL DEVICES

780001-02 TYPICAL PAVEMENT MARKINGS


### TRAFFIC DATA

ADT: GARFIELD STREET (LOCAL COLLECTOR) 1,400 VPD (2007)

2,100 VPD (2020)

POSTED SPEED

DESIGN SPEED 25 MPH (EXISTING) 30 MPH (PROPOSED) 25 MPH (PROPOSED)



FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E. JOINT UTILITY LOCATION

INFORMATION FOR **EXCAVATION CALL 811** 

Know what's below.
Call before you dig.

Illinois Professional Design Firm # 184-000108 SEC Group, Inc.

McHenry \* Yorkville \* New Lenox \* Chicago

www.secgroupinc.com


STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS** 

# PLANS FOR PROPOSED FEDERAL AID HIGHWAY

FAU 0007 (GARFIELD STREET) MCKINLEY STREET TO OLD ORCHARD

SECTION NO.: 09-00061-00-RS PROJECT NO.: ARA-9003(449) CITY OF HARVARD **MCHENRY COUNTY** C-91-899-09

### PROJECT LOCATION MAP

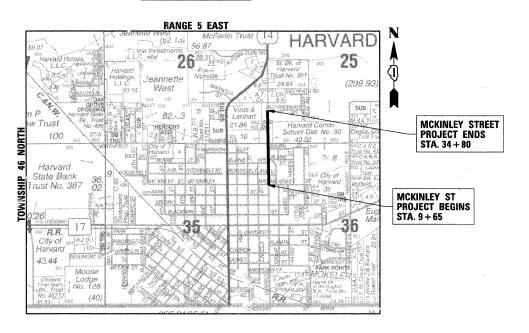


PROJECT LOCATION MAP N.T.S. PROJECT LENGTH

GROSS LENGTH OF PROJECT = 2515 FT (0.476 MI) NET LENGTH OF PROJECT = 2515 FT (0.476 MI)

SECTION 09-00061-00-RS MCHENRY FED. ROAD DIST. NO. ILLINOIS CONTRACT NO. 63232

#### **\$CONTRACT\$**





PROFESSIONAL ENGINEER'S SIGN & SEAL	Managamananananananananananananananananan
DD C Jh	DAVID C. JOHANSON  Tone 30,200
DAVID C. JOHANSON EXPIRES: 11-30-09	TO FILL WORKS
EXCINES: 11-30-03	SEAL

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

 $\circ$ 

 $\circ$ 

CONTRACT NO. 63232